


环保物料

Pin数	尺寸A	尺寸B
2	1.00	3.50
3	2.00	4.50
4	3.00	5.50
5	4.00	6.50
6	5.00	7.50
7	6.00	8.50
8	7.00	9.50
9	8.00	10.50
10	9.00	11.50
11	10.00	12.50
12	11.00	13.50
13	12.00	14.50
14	13.00	15.50
15	14.00	16.50
16	15.00	17.50
17	16.00	18.50
18	17.00	19.50
19	18.00	20.50
20	19.00	21.50
21	20.00	22.50
22	21.00	23.50
23	22.00	24.50
24	23.00	25.50
25	24.00	26.50

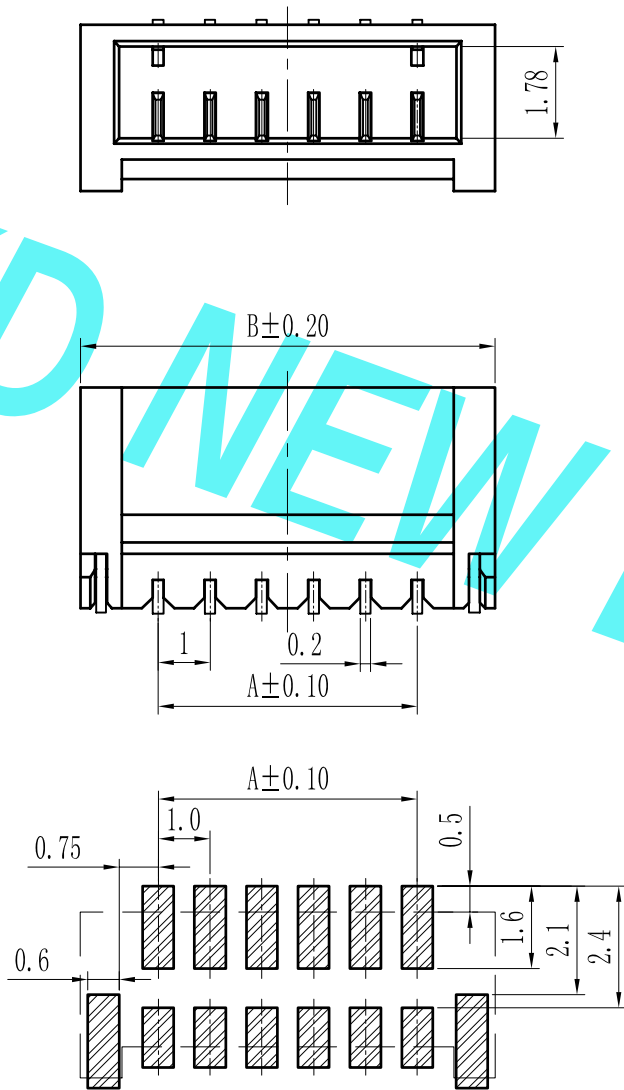

P.C.B LAYOUT

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 50V DC, AC(rms)
Rated voltage: 50V DC, AC(rms)
- ◆额定电流: 1A (AWG #28)
Rated Current: 1A (AWG #28)
- ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp: -25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙9T, UL94-V0
Insulator: Nylon9T, UL94-V0
- ◆接触针: 磷铜
Contact PIN: Phosphor bronze
- ◆焊片: 磷铜
Solder tab: Phosphor bronze

1.0 T - 1 - LT - n A/Y

间距 (Pitch)
条形连接器 (Bar connector)
类型 (Poles)
立式: L (Vertical pyle:L)
线数 (Poles)
A:A座 Y:Y座 A:A seat Y:Y seat

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: NHS-LI-NA	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER					
AO	新图面发行	2018.12.03		UNIT: MM	0.00±0.15	X° ±3°					TITLE: 1.00mm pitch Dual Wafer
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.03			