


Pin数	尺寸A	尺寸B	尺寸C	尺寸D	尺寸E
6	5.00	11.05	14.75	18.40	7.85
8	7.00	13.05	16.75	20.40	9.85
10	9.00	15.05	18.75	22.40	11.85
12	11.00	17.05	20.75	24.40	13.85
14	13.00	19.05	22.75	26.40	15.85
16	15.00	20.05	24.75	28.40	17.85
18	17.00	22.05	26.75	30.40	19.85
20	19.00	23.05	28.75	32.40	21.85
22	21.00	25.05	30.75	34.40	23.85
24	23.00	27.05	32.75	36.40	25.85
26	25.00	29.05	34.75	38.40	27.85
28	27.00	31.05	36.75	40.40	29.85
30	29.00	33.05	38.75	42.40	31.85
32	31.00	35.05	40.75	44.40	33.85
34	33.00	37.05	42.75	46.40	35.85
36	35.00	39.05	44.75	48.40	37.85
38	37.00	41.05	46.75	50.40	39.85
40	39.00	43.05	48.75	52.40	31.85
42	41.00	45.05	50.75	54.40	33.85
44	43.00	47.05	52.75	56.40	35.85
46	45.00	49.05	54.75	58.40	37.85
48	47.00	51.05	56.75	60.40	39.85
50	49.00	53.05	58.75	62.40	41.85

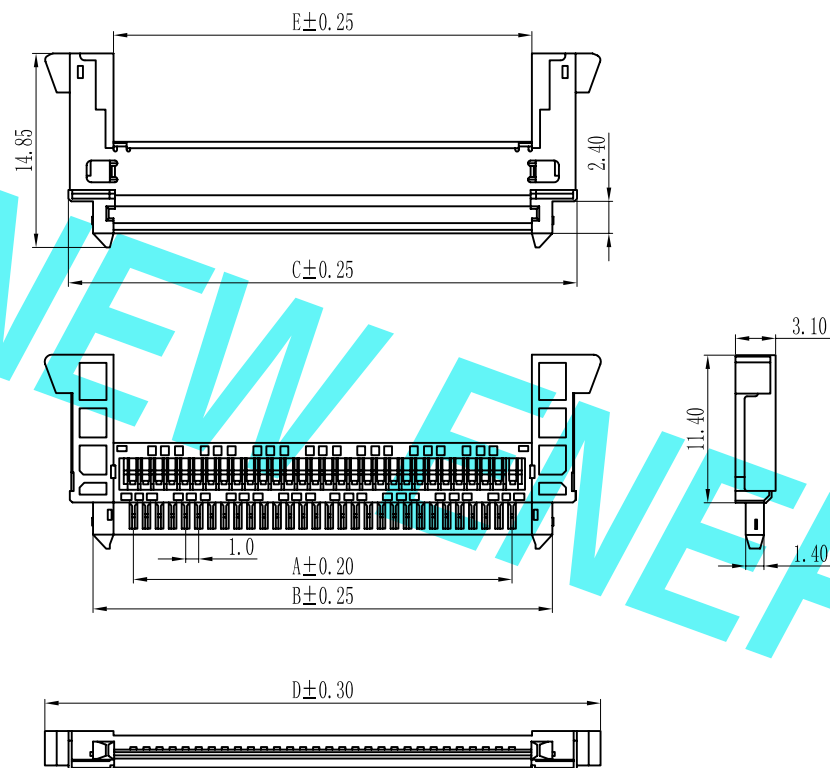

◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32

◆额定电压: 50V DC, AC(rms)
Rated voltage: 50V DC, AC(rms)

◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)

◆耐压值: 500V AC/minute
Withstand voltage: 500V
AC/min

◆工作温度：-25℃~+85℃
Working Temp:-25℃~+85℃

◆绝缘电阻：100MΩ Min
Insulation resistance: $\geq 100\text{M}\Omega$

◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

◆绝缘体：尼龙9T, UL94-V0
Insulator: Nylon9T, UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康肖新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司地址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175888@qq.com 公司传真: 0769-85392827	PART. NO: F1-E-H(1.0)	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.12.03	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE: 1.00mm pitch Single Housing	REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	肖丽娟	2018.12.03			

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---