
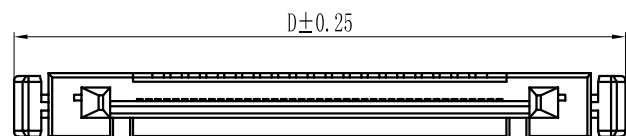
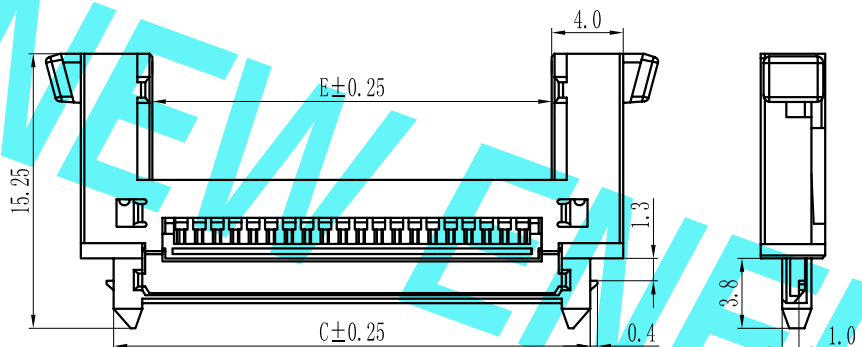


环保物料

Pin数	尺寸A	尺寸B	尺寸C	尺寸D	尺寸E
6	5.00	16.25	12.60	19.95	8.28
8	7.00	18.25	14.60	21.95	10.28
10	9.00	20.25	16.60	23.95	12.28
12	11.00	22.25	18.60	25.95	14.28
14	13.00	24.25	20.60	27.95	16.28
16	15.00	26.25	22.60	29.95	18.28
18	17.00	28.25	24.60	31.95	20.28
20	19.00	30.25	26.60	33.95	22.28
22	21.00	32.25	28.60	35.95	24.28
24	23.00	34.25	30.60	37.95	26.28
26	25.00	36.25	32.60	39.95	28.28
28	27.00	38.25	34.60	41.95	30.28
30	29.00	40.25	36.60	43.95	32.28
32	31.00	42.25	38.60	45.95	34.28
34	33.00	44.25	40.60	47.95	36.28
36	35.00	46.25	42.60	49.95	38.28
38	37.00	48.25	44.60	51.95	40.28
40	39.00	50.25	46.60	53.95	42.28
42	41.00	52.25	48.60	55.95	44.28
44	43.00	54.25	50.60	57.95	46.28
46	45.00	56.25	52.60	59.95	48.28
48	47.00	58.25	54.60	61.95	50.28
50	49.00	60.25	56.60	63.95	52.28

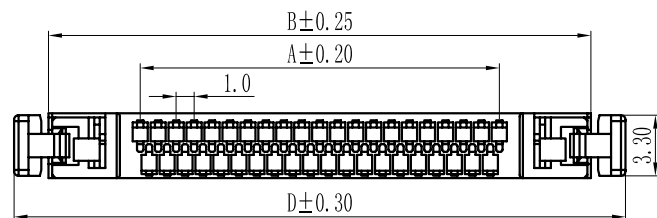

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 50V DC, AC(rms)
Rated voltage: 50V DC, AC(rms)
- ◆额定电流: 1A(AWG #28)
Rated Current: 1A(AWG #28)
- ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙9T, UL94-V0
Insulator: Nylon9T, UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: F1-E-H(1.0)
				LINEAR	ANGLES	APPROVED				DWG. NO:
A0	新图面发行	2018. 12. 03		0. 00±0. 15	X° REF±6°	DESIGNER				REV: A0
REV.	REVISION RECORD	DATE		SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 03	SHEET: 1/1

TITLE: 1.00mm pitch Single Housing