

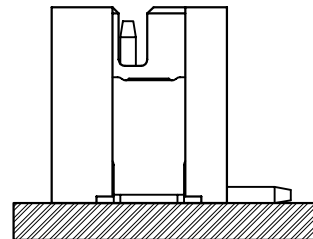
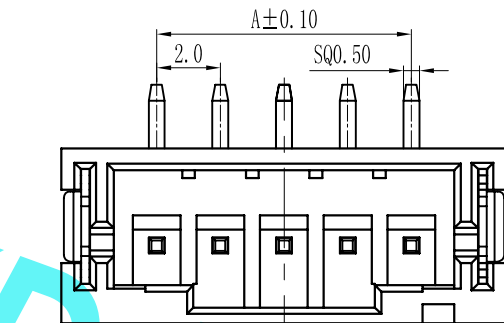


环保物料


Pin数	尺寸A	尺寸B
4	6.00	12.00
5	8.00	14.00
6	10.00	16.00
7	12.00	18.00
8	14.00	20.00
9	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00
17	32.00	38.00
18	34.00	40.00
19	36.00	42.00
20	38.00	44.00
21	40.00	46.00
22	42.00	48.00
23	44.00	50.00
24	46.00	52.00
25	48.00	54.00
26	50.00	56.00
27	52.00	58.00



Assembly layout

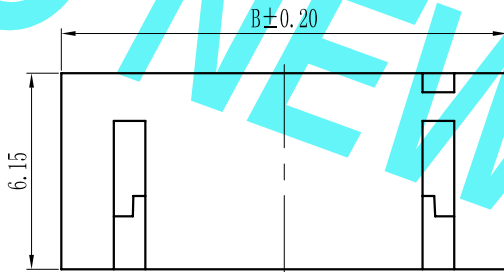

P. C. B LAYOUT

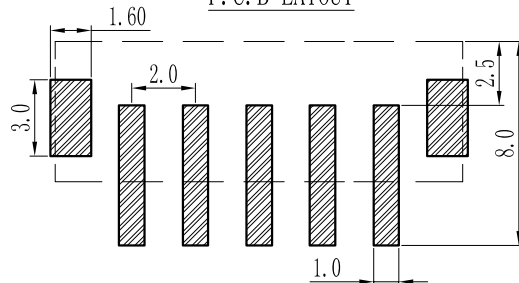

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#24-#32
Applicable Wire:AWG#24-#32
- ◆额定电压: AC, DC, 100V (有效值)
Voltage rating: AC, DC, 100V(rms)
- ◆额定电流: 2A, AC, DC (AWG#28)
Current rating:2A, AC, DC (AWG#28)
- ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 10m\Omega$
Contact resistance: $\leq 10m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙9T, UL94-V0
Insulator:Nylon94-V0
- ◆接触针: 磷铜
Contact PIN:Phosphor Bronze

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: PH2.0-1T-NA		
				LINEAR	ANGLES	APPROVED					DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER						
AO	新图面发行	2018.12.05	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 2.00mm pitch Single Wafer		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.05		REV: AO	SHEET: 1/1	