


环保物料

Pin数	尺寸A	尺寸B
4	6.00	8.10
5	8.00	10.10
6	10.00	12.10
7	12.00	14.10
8	14.00	16.10
9	16.00	18.10
10	18.00	20.10
11	20.00	22.10
12	22.00	24.10
13	24.00	26.10
14	26.00	28.10
15	28.00	30.10
16	30.00	32.10
17	32.00	34.10
18	34.00	36.10
19	36.00	38.10
20	38.00	40.10
21	40.00	42.10
22	42.00	44.10
23	44.00	46.10
24	46.00	48.10
25	48.00	50.10
26	50.00	52.10
27	52.00	54.10

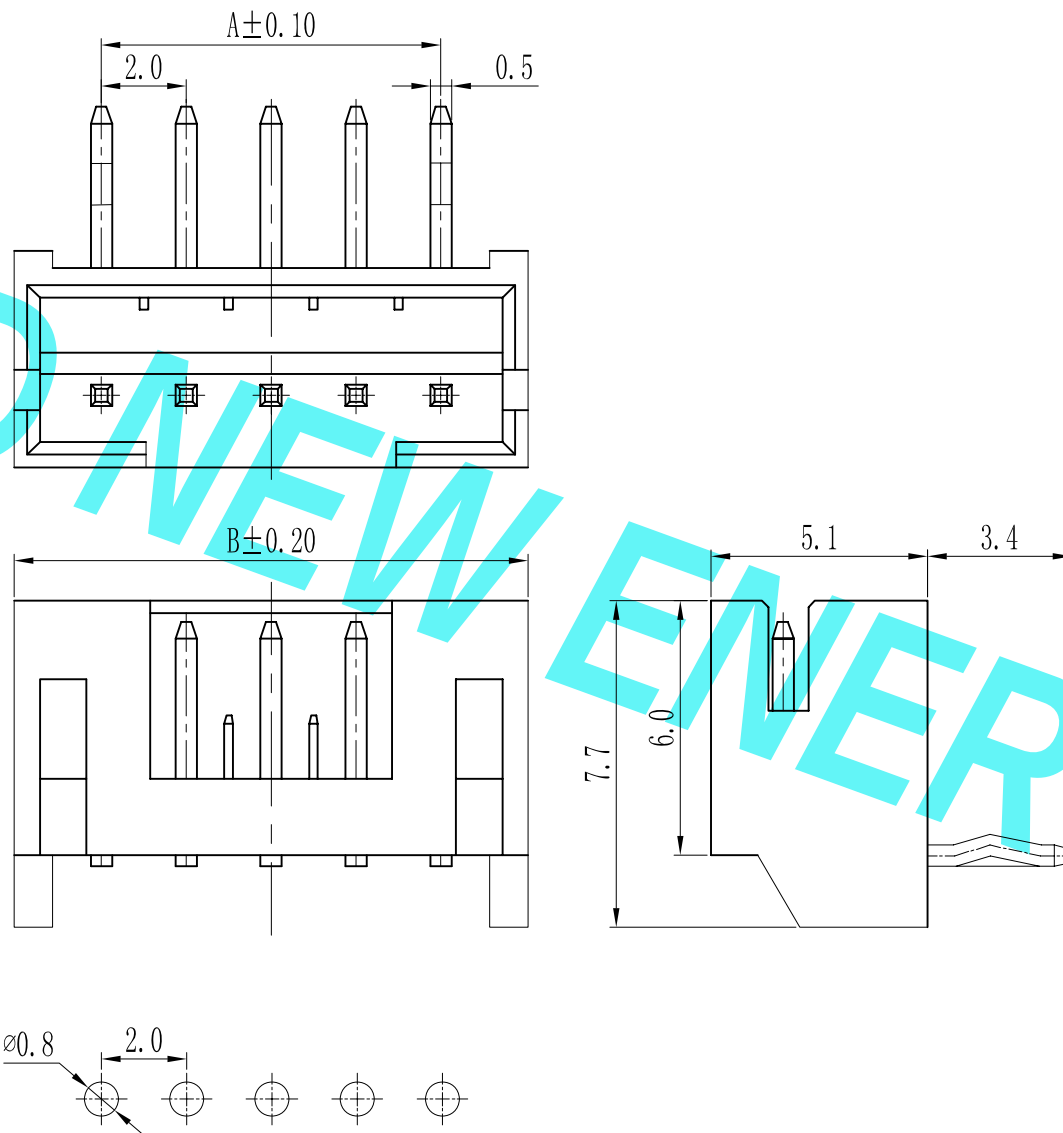

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#24-#32
Applicable Wire:AWG#24-#32
- ◆额定电压: AC,DC,100V (有效值)
Voltage rating: AC,DC,100V(rms)
- ◆额定电流: 2A,AC,DC(AWG#24)
Current rating:2A,AC,DC(AWG#24)
- ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 10\text{m}\Omega$
Contact resistance: $\leq 10\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66,UL94-V0
Insulator:Nylon66 UL94-V0
- ◆接触针: 黄铜
Contact PIN:Brass

REV.	新图面发行	2018. 12. 05	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	TITLE: 2.00mm pitch Single Wafer	PART. NO: PH2. 0-NAWD(打K)
				LINEAR	ANGLES					
REV.	REVISION RECORD	DATE	SIZE: A4	0.00±0.15	X° ±3°	APPROVED				
				0.0±0.25	X° REF±6°	DESIGNER				
				0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 05		

东莞市康号新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD
公司网址: www.dgoonne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

DWG. NO:

REV: A0

SHEET: 1/1