
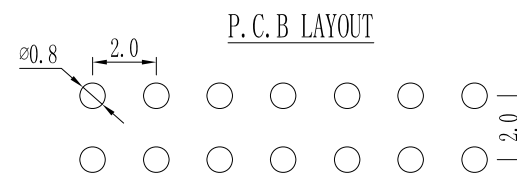
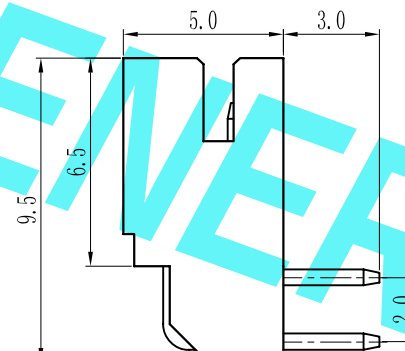
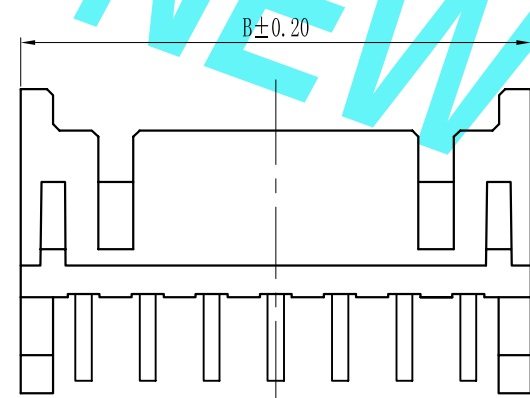
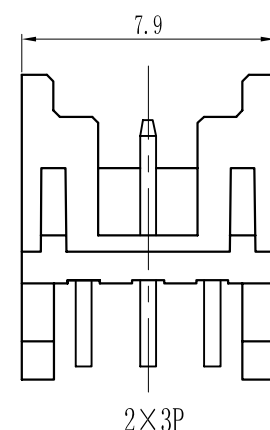


环保物料

Pin数	尺寸A	尺寸B
4	6.00	9.90
5	8.00	11.90
6	10.00	13.90
7	12.00	15.90
8	14.00	17.90
9	16.00	19.90
10	18.00	21.90
11	20.00	23.90
12	22.00	25.90
13	24.00	27.90
14	26.00	29.90
15	28.00	31.90
16	30.00	33.90
17	32.00	35.90
18	34.00	37.90
19	36.00	39.90
20	38.00	41.90
21	40.00	43.90
22	42.00	45.90
23	44.00	47.90
24	46.00	49.90
25	48.00	51.90
26	50.00	43.90
27	52.00	45.90

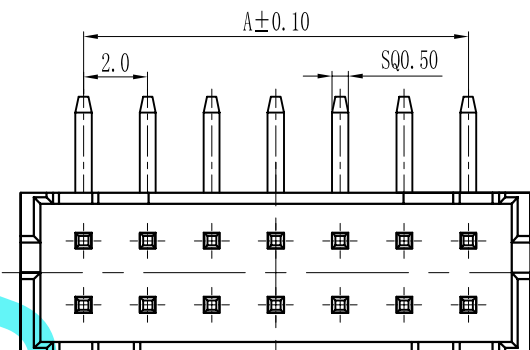

- 技术参数 SPECIFICATIONS
- ◆间距: 2.0 Pitch:2.0
 - ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
 - ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
 - ◆额定电流: 3A, AC, DC (AWG#28)
Current rating:3A, AC, DC (AWG#28)
 - ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
 - ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
 - ◆接触电阻: ≤10mΩ
Contact resistance:≤10mΩ
- 材料 MATERIAL
- ◆绝缘体: 尼龙9T, UL94-V0
Insulator:Nylon94-V0
 - ◆接触针: 黄铜
Contact PIN:Brass

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: PHD2. 0-2×NAW		
				LINEAR	ANGLES					APPROVED		
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.12.05		UNIT: MM	0.00±0.15	X° ±3°					TITLE: 2.00mm pitch Dual Wafer	DWG. NO:
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.05			REV: A0	SHEET: 1/1