


环保物料

Pin数	尺寸A	尺寸B
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50
17	32.00	34.50
18	34.00	36.50
19	36.00	38.50
20	38.00	40.50
21	40.00	42.50
22	42.00	44.50
23	44.00	46.50
24	46.00	48.50
25	48.00	50.50
26	50.00	52.50
27	52.00	54.50

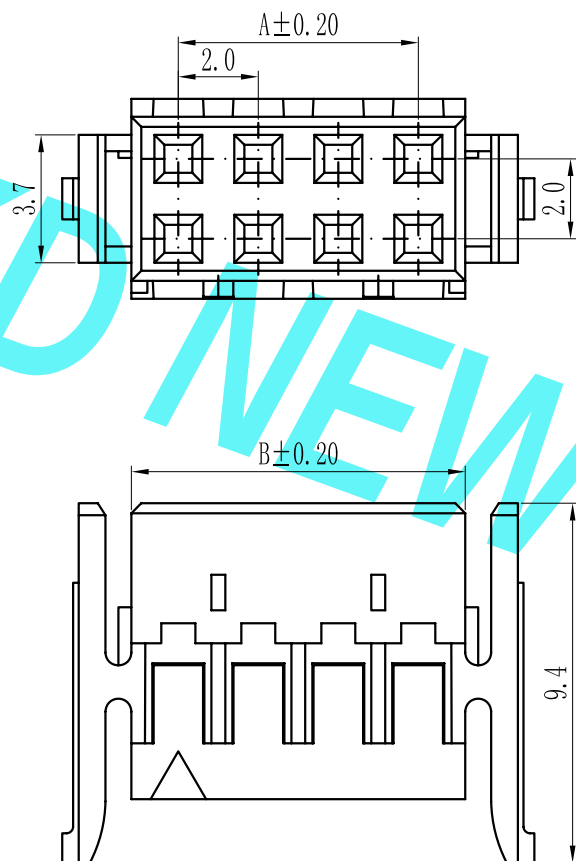

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#24-#30
Applicable Wire:AWG#24-#30
- ◆额定电压: AC,DC,100V (有效值)
Voltage rating: AC,DC,100V(rms)
- ◆额定电流: 3A, AC, DC (AWG#24)
Current rating:3A, AC, DC (AWG#24)
- ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 10\text{m}\Omega$
Contact resistance: $\leq 10\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-V2
Insulator:Nylon66 UL94-V2

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: PH2.0		
				LINEAR	ANGLES	APPROVED						
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.12.05	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 2.00mm pitch Dual Housing	DWG. NO:	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.05			REV: A0	SHEET: 1/1