


环保物料

Pin数	尺寸A	尺寸B
4	6.00	8.25
5	8.00	10.25
6	10.00	12.25
7	12.00	14.25
8	14.00	16.25
9	16.00	18.25
10	18.00	20.25
11	20.00	22.25
12	22.00	24.25
13	24.00	26.25
14	26.00	28.25
15	28.00	30.25
16	30.00	32.25
17	32.00	34.25
18	34.00	36.25
19	36.00	38.25
20	38.00	40.25
21	40.00	42.25
22	42.00	44.25
23	44.00	46.25
24	46.00	48.25
25	48.00	50.25
26	50.00	52.25
27	52.00	54.60

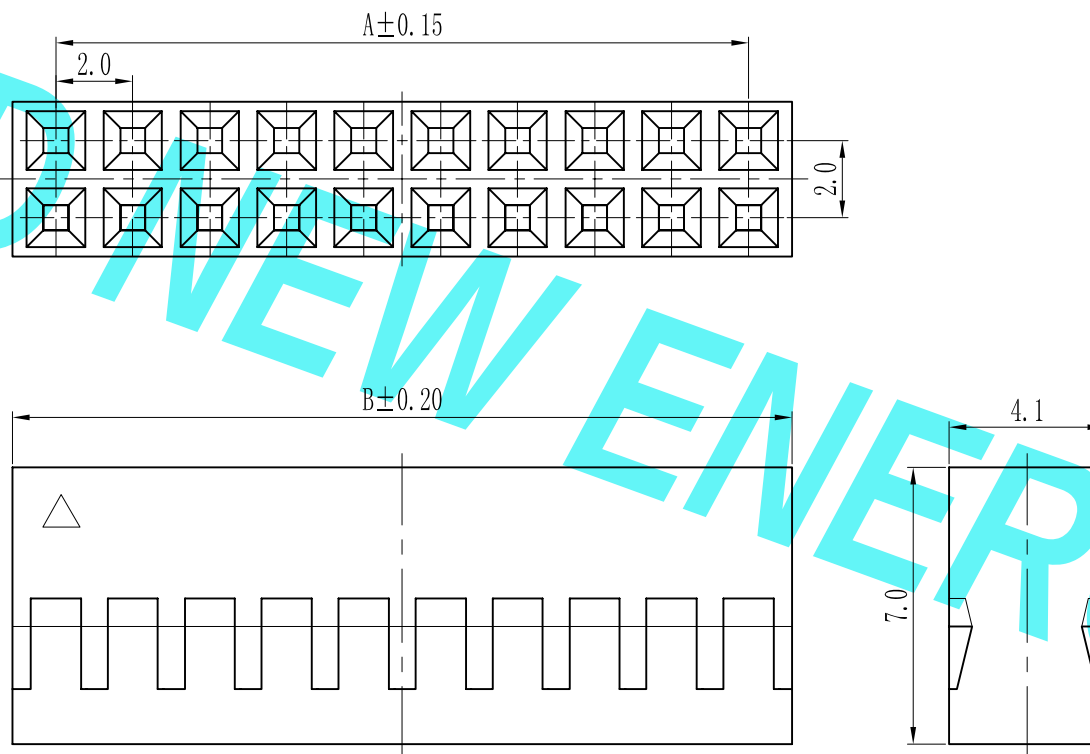

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#26-#30
Applicable Wire:AWG#26-#30
- ◆额定电压: AC, DC, 100V (有效值)
Voltage rating: AC, DC, 100V (rms)
- ◆额定电流: 1A, AC, DC (AWG#24)
Current rating: 1A, AC, DC (AWG#24)
- ◆耐压值: 800V AC/minute
Withstand voltage: 800V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: PBT, UL94V-0
Insulator: PBT UL94V-0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康岛新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175888@qq.com 公司传真: 0769-85392527	PART. NO: PHS 2.0	
				LINEAR	ANGLES	APPROVED					DWG. NO:
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.12.05	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE: 2.00mm pitch Dual Housing	REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.05			

 **东莞市康导新能源科技有限公司**
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD

公司网址: www.dgconne.cn 公司电话: 0769-85337633
 邮箱: 285017586@qq.com 公司传真: 0769-85362827

PART. NO: PHS 2.0

DWG. NO:

REV: A0	SHEET: 1 / 1
---------	--------------