


环保物料

Pin数	尺寸A	尺寸B
4	6.00	8.10
5	8.00	10.10
6	10.00	12.10
7	12.00	14.10
8	14.00	16.10
9	16.00	18.10
10	18.00	20.10
11	20.00	22.10
12	22.00	24.10
13	24.00	26.10
14	26.00	28.10
15	28.00	30.10
16	30.00	32.10
17	32.00	34.10
18	34.00	36.10
19	36.00	38.10
20	38.00	40.10
21	40.00	42.10
22	42.00	44.10
23	44.00	46.10
24	46.00	48.10
25	48.00	50.10
26	50.00	52.10
27	52.00	54.10

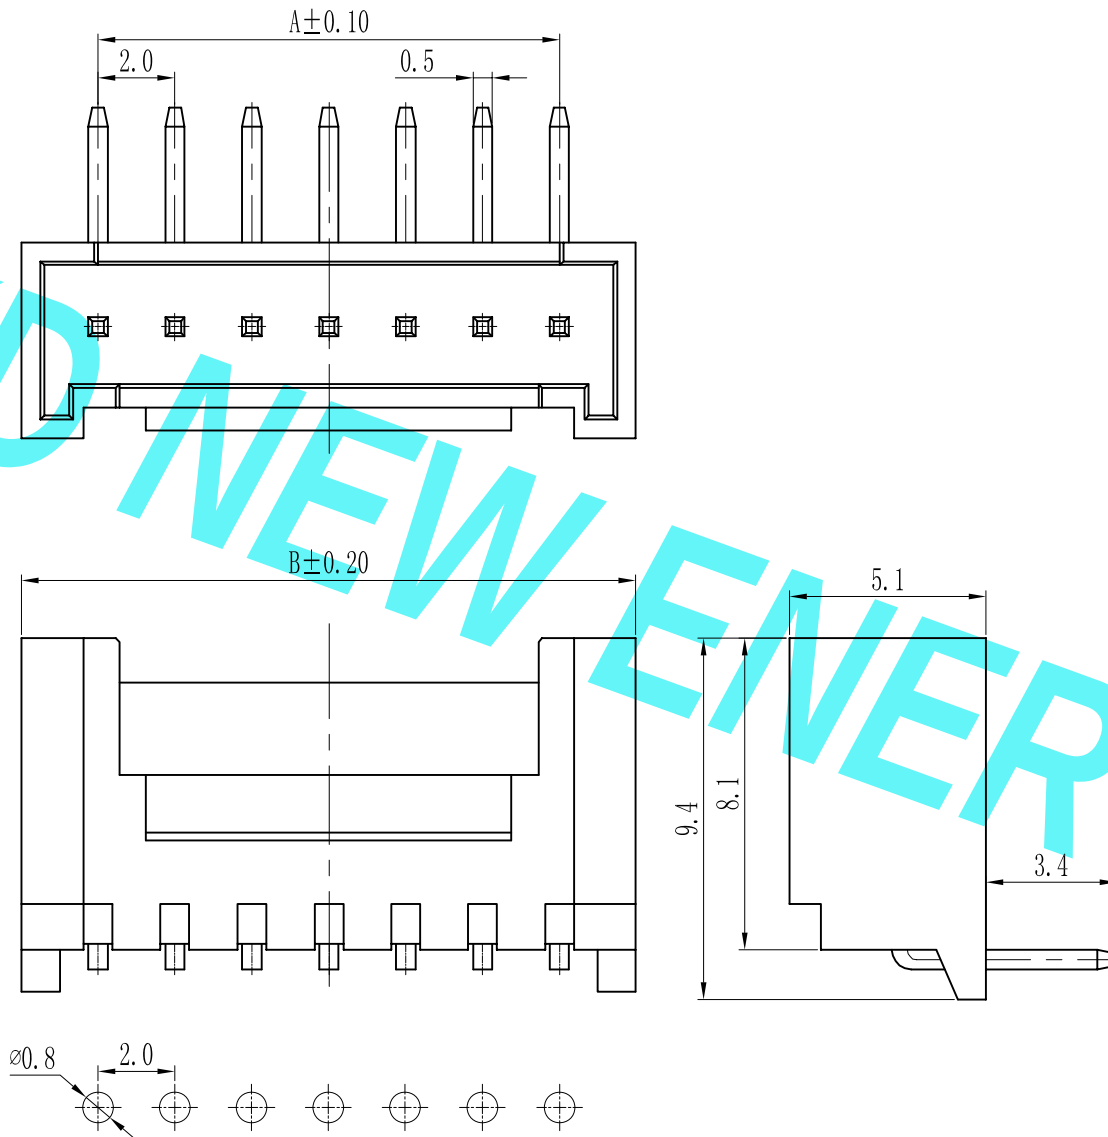

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#22-#30
Applicable Wire:AWG#24-#32
- ◆额定电压: AC,DC, 125V (有效值)
Voltage rating: AC,DC, 125V(rms)
- ◆额定电流: 2A, AC, DC (AWG#22)
Current rating:2A, AC, DC (AWG#22)
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Working Temp: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- ◆绝缘电阻: $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-V2
Insulator: Nylon66 UL94-V2
- ◆接触针: 黄铜
Contact PIN: Brass

P. C. B LAYOUT

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: PHS-HAWD
				LINEAR	ANGLES	APPROVED				DWG. NO:
				0.0 $\pm$ 0.25	X $^{\circ}$ REF $\pm$ 6 $^{\circ}$	DESIGNER				REV: A0
A0	新图面发行	2018.12.05		0.00 $\pm$ 0.15	X $^{\circ}$ $\pm$ 3 $^{\circ}$	DRAWN	肖丽娟	2018.12.05		SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 $\pm$ 0.08	X $^{\circ}$ X' $\pm$ 2 $^{\circ}$				TITLE: 2.00mm pitch Single Wafer	