



环保物料

Pin数	尺寸A	尺寸B
4	6.00	10.90
5	8.00	12.90
6	10.00	14.90
7	12.00	16.90
8	14.00	18.90
9	16.00	20.90
10	18.00	22.90
11	20.00	24.90
12	22.00	26.90
13	24.00	28.90
14	26.00	30.90
15	28.00	32.90
16	30.00	34.90
17	32.00	36.90
18	34.00	38.90
19	36.00	40.90
20	38.00	42.90
21	40.00	44.90
22	42.00	46.90
23	44.00	48.90
24	46.00	50.90
25	48.00	52.90
26	50.00	54.90
27	52.00	56.90

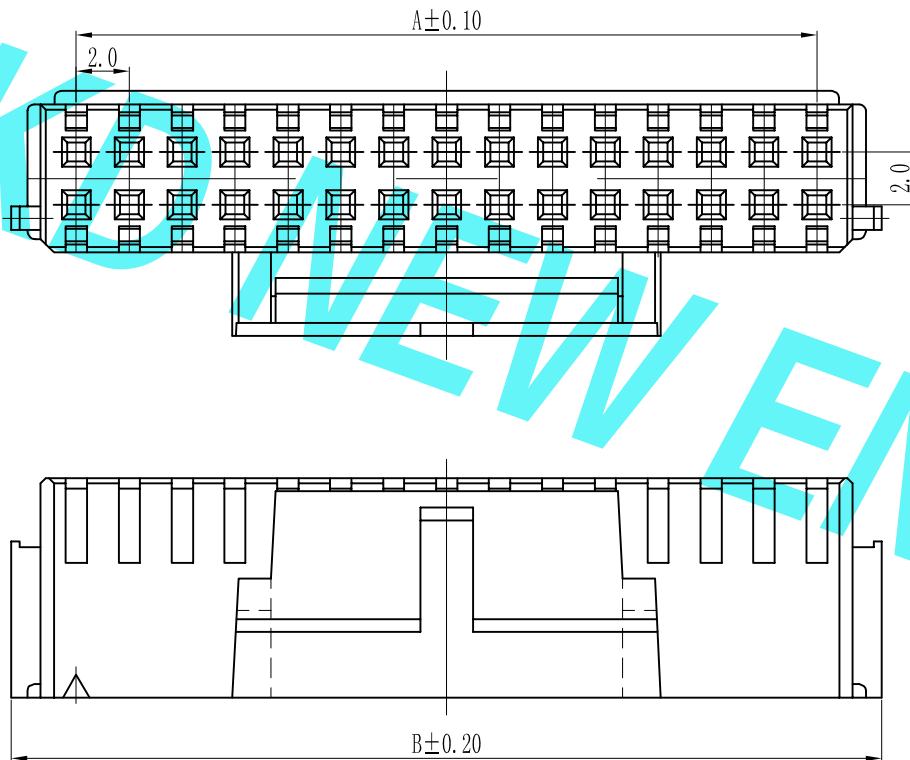

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#28-#32
Applicable Wire:AWG#28-#32
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 3A, AC, DC (AWG#24)
Current rating:3A, AC, DC (AWG#24)
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻: $\leq 30m\Omega$
Contact resistance: $\leq 30m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-V2
Insulator:Nylon66 UL94-V2

REV.	新图面发行	2018. 12. 05	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0. 0 $\pm$ 0. 25	X° REF $\pm$ 6°			
				0. 00 $\pm$ 0. 15	X° $\pm$ 3°			
REV.	新图面发行	2018. 12. 05	UNIT: MM	0. 000 $\pm$ 0. 08	X° X' $\pm$ 2°	DRAWN	肖丽娟	2018. 12. 05

东莞市康号新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD
公司网址: www.dgconne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:
2.00mm pitch Dual Housing

PART. NO: PHSD2. 0-2 $\times$ NA

DWG. NO:

REV: A0 SHEET: 1/1