


环保物料

Pin数	尺寸A	尺寸B
4	6.00	9.40
5	8.00	11.40
6	10.00	13.40
7	12.00	15.40
8	14.00	17.40
9	16.00	19.40
10	18.00	21.40
11	20.00	23.40
12	22.00	25.40
13	24.00	27.40
14	26.00	29.40
15	28.00	31.40
16	30.00	33.40
17	32.00	35.40
18	34.00	37.40
19	36.00	39.40
20	38.00	41.40
21	40.00	43.40
22	42.00	45.40
23	44.00	47.40
24	46.00	49.40
25	48.00	51.40
26	50.00	53.40
27	52.00	55.40

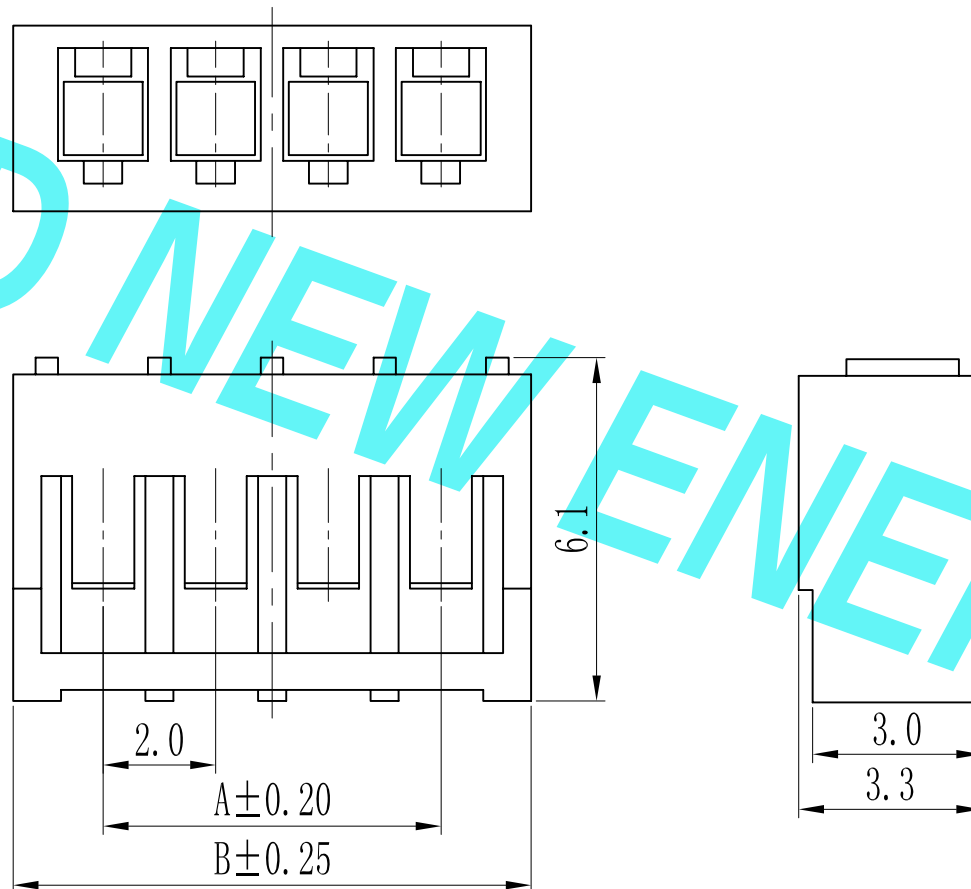

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
 - ◆适用线规: AWG#24-#30
Applicable Wire:AWG#24-#30
 - ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V (rms)
 - ◆额定电流: 2A, AC, DC (AWG#24)
Current rating:2A, AC, DC (AWG#24)
 - ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
 - ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
 - ◆接触电阻: $\leq 10m\Omega$
Contact resistance: $\leq 10m\Omega$
- 材料 MATERIAL
- ◆绝缘体: 尼龙66, UL94-V2
Insulator:Nylon66 UL94-V2

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司地址: www.dgoonne.cn 公司电话: 0769-85337533 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: SAN-NY
				LINEAR	ANGLES	APPROVED				DWG. NO:
				0.0±0.25	X° REF±6°	DESIGNER				REV: A0
A0	新图面发行	2018.12.05	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.12.05		SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°				TITLE: 2.00mm pitch Single Housing	