


环保物料

Pin数	尺寸A	尺寸B
4	6.00	8.25
5	8.00	10.25
6	10.00	12.25
7	12.00	14.25
8	14.00	16.25
9	16.00	18.25
10	18.00	20.25
11	20.00	22.25
12	22.00	24.25
13	24.00	26.25
14	26.00	28.25
15	28.00	30.25
16	30.00	32.25
17	32.00	34.25
18	34.00	36.25
19	36.00	38.25
20	38.00	40.25
21	40.00	42.25
22	42.00	44.25
23	44.00	46.25
24	46.00	48.25
25	48.00	50.25
26	50.00	52.25
27	52.00	54.60

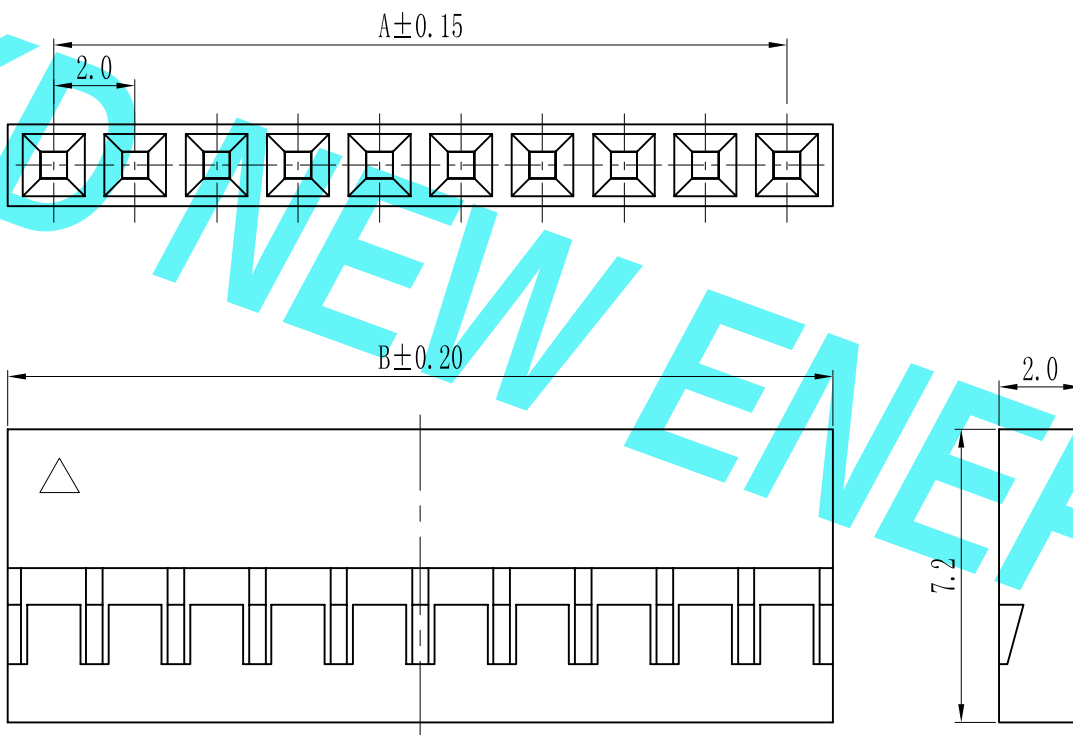

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
 - ◆适用线规: AWG#26-#30
Applicable Wire:AWG#26-#30
 - ◆额定电压: AC,DC,100V (有效值)
Voltage rating: AC,DC,100V(rms)
 - ◆额定电流: 1A, AC, DC (AWG#24)
Current rating:1A, AC, DC (AWG#24)
 - ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
 - ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
 - ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ
- 材料 MATERIAL
- ◆绝缘体: PBT, UL94V-V0
Insulator:PBT UL94V-V0

REV.	新图面发行	2018. 12. 05	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°	APPROVED		
				0.00±0.15	X° ±3°	DESIGNER		
				0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 05

东莞市康号新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD
公司网址: www.dgoonne.cn 公司电话: 0769-85337533
邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE: 2.00mm pitch Single Housing

PART. NO:	TJC8 2.0-1×NY
DWG. NO:	
REV:	A0
SHEET:	1/1