
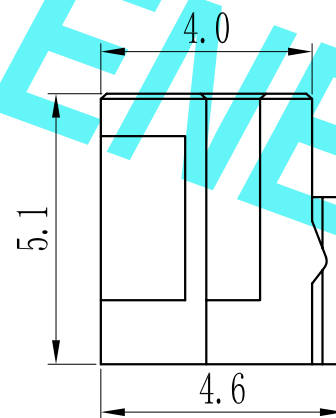
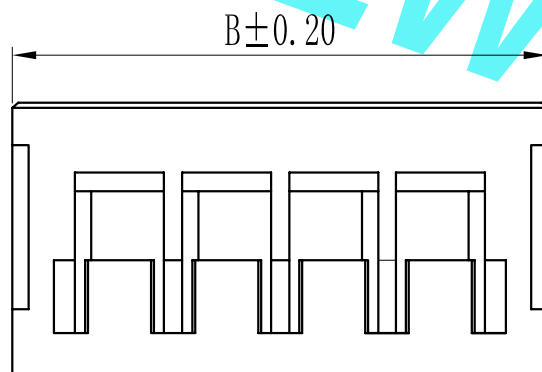


环保物料

Pin数	尺寸A	尺寸B
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00
17	32.00	36.00
18	34.00	38.00
19	36.00	40.00
20	38.00	42.00
21	40.00	44.00
22	42.00	46.00
23	44.00	48.00
24	46.00	50.00
25	48.00	52.00
26	50.00	54.00
27	52.00	56.00

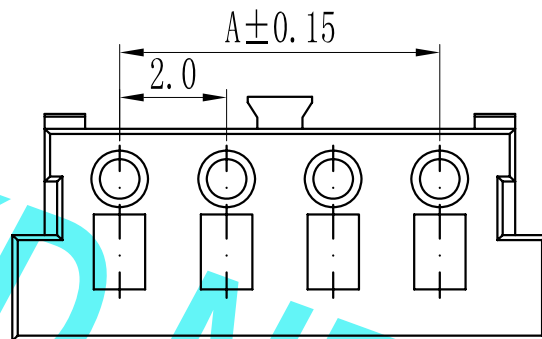

SPECIFICATIONS

Voltage rating : 125V AC, DC
 Current rating : 4A AC,DC.
 Withstanding voltage : 1000V AC/minute
 Insulation resistance : 1000M Ω min.
 Temperature range : - 25° ~ + 85°
 Contact resistance : Initial value/10m Ω max.
 After environmental testing/20m Ω max.

WAFER

Part No. : 200AP
 Poles : 02-15
 Material : Nylon 66 UL94V-0
 Q'ty: 1000pcs/bag

REV.	新图面发行	2018. 12. 05	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	TITLE: 2.00mm pitch Single Housing	PART. NO: 200AP	
				LINEAR	ANGLES						
				0. 0 $\pm$ 0. 25	X° REF $\pm$ 6°	APPROVED				DWG. NO:	
				0. 00 $\pm$ 0. 15	X° $\pm$ 3°	DESIGNER				REV: A0 SHEET: 1/1	
				0. 000 $\pm$ 0. 08	X° X' $\pm$ 2°	DRAWN	肖丽娟	2018. 12. 05			

东莞市康号新能源科技有限公司
 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD
 公司网址: www.dgkonne.cn 公司电话: 0769-85337533
 邮箱: 2850175986@qq.com 公司传真: 0769-85392827