


环保物料

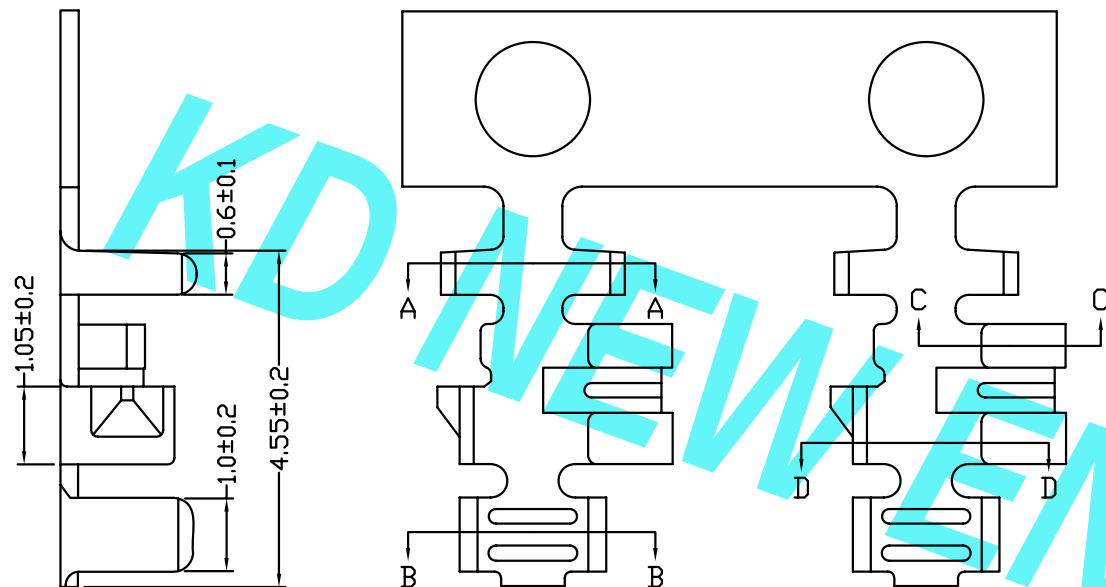

SPECIFICATIONS

Voltage rating : 125V AC, DC

Current rating : 4A AC,DC.

Withstanding voltage : 1000V AC/minute

Insulation resistance : 1000MΩ min.

Temperature range : - 25° ~ + 85°

Contact resistance : Initial value/10mΩ max.

After environmental testing/20mΩ max.


TERMINAL

Part No.: 200AP

Applicable Wire: AWG#22-26

Material: Phosphor Bronze

Q'ty: 10000 pcs/reel

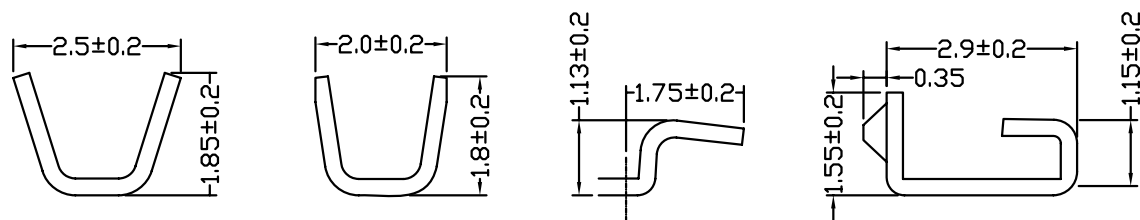

Section: A-A

Section: B-B

Section: C-C

Section: D-D

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮箱: 2850175988@qq.com 公司传真: 0769-85392827	PART. NO: 200AP	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
A0	新图面发行	2018. 12. 05		0. 00±0. 15	X° ±3°	DESIGNER				REV: A0 SHEET: 1/1	
REV.	REVISION RECORD	DATE		SIZE: A4	0. 000±0. 08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 05	TITLE: 2. 00mm pitch Crimp Termianl	