
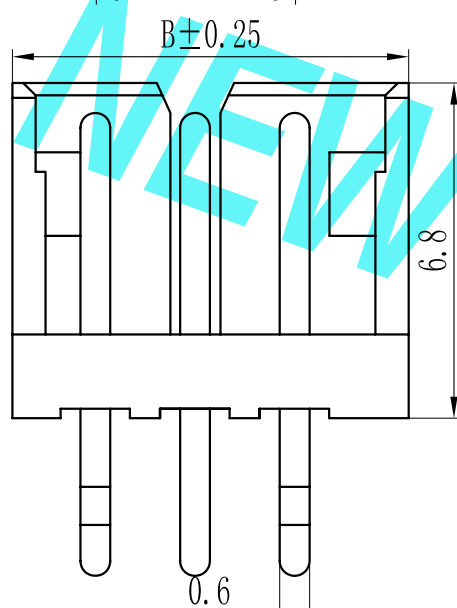


环保物料

Pin数	尺寸A	尺寸B
4	6.00	9.85
5	8.00	11.85
6	10.00	13.85
7	12.00	15.85
8	14.00	17.85
9	16.00	19.85
10	18.00	21.85
11	20.00	23.85
12	22.00	25.85
13	24.00	27.85
14	26.00	29.85
15	28.00	31.85
16	30.00	33.85
17	32.00	35.85
18	34.00	37.85
19	36.00	39.85
20	38.00	41.85
21	40.00	43.85
22	42.00	45.85
23	44.00	47.85
24	46.00	49.85
25	48.00	51.85
26	50.00	53.85
27	52.00	55.85

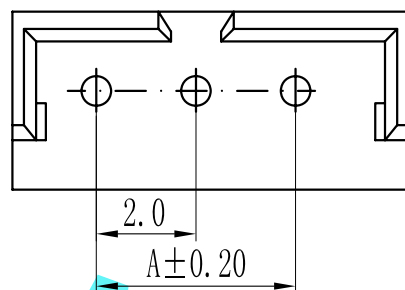


P.C.B LAYOUT

SPECIFICATIONS

- Voltage rating : 125V AC, DC
- Current rating : 4A AC,DC.
- Withstanding voltage : 1000V AC/minute
- Insulation resistance : 1000MΩ min.
- Temperature range : - 25° ~ + 85°
- Contact resistance : Initial value/10mΩ max.
- After environmental testing/20mΩ max.

WAFER

- Part No. : 200AP
- Poles : 02-15
- Material : Nylon 66 UL94V-0
- Q'ty: 1000pcs/bag

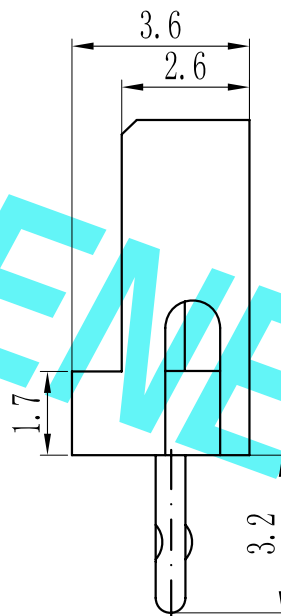

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 200AP		
				LINEAR	ANGLES	APPROVED					DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.12.05	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 2.00mm pitch Single Wafer		REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.05				