
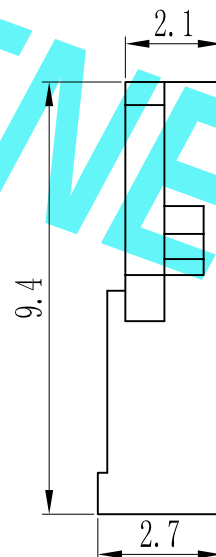
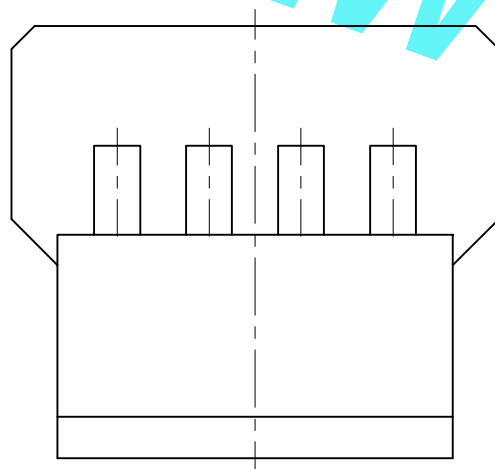


Pin数	尺寸A	尺寸B
4	6.00	10.50
5	8.00	12.50
6	10.00	14.50
7	12.00	16.50
8	14.00	18.50
9	16.00	20.50
10	18.00	22.50
11	20.00	24.50
12	22.00	26.50
13	24.00	28.50
14	26.00	30.50
15	28.00	32.50
16	30.00	34.50
17	32.00	36.50
18	34.00	38.50
19	36.00	40.50
20	38.00	42.50
21	40.00	44.50
22	42.00	46.50
23	44.00	48.50
24	46.00	50.50
25	48.00	52.50
26	50.00	54.50
27	52.00	56.50

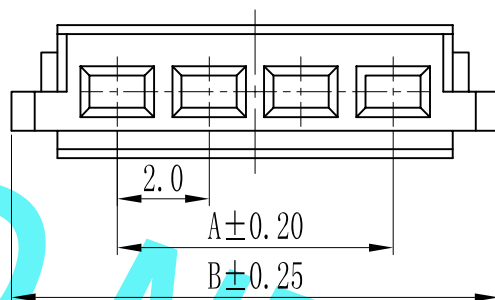

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#24-#28
Applicable Wire:AWG#24-#28
- ◆额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V (rms)
- ◆额定电流: 2A, AC, DC (AWG#24)
Current rating:2A, AC, DC (AWG#24)
- ◆耐压值: 500V AC/minute
Withstand voltage:500V AC/minute
- ◆工作温度 : -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻 : $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

◆绝缘体：尼龙66, UL94-V2
Insulator: Nylon66 UL94-V2

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337633 邮 箱: 2850175966@qq.com 公司传真: 0769-85392827	PART. NO: 51005-胶芯		
				LINEAR	ANGLES	APPROVED					DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2018.12.05	UNIT: MM	0.00±0.15	X° ±3°				TITLE: 2.00mm pitch Single Housing	REV: A0		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.05		SHEET: 1/1		

 **东莞市康导新能源科技有限公司**
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD

公司网址: www.dgconne.cn 公司电话: 0769-85337633
邮箱: 285017586@qq.com 咨询热线: 0769-85362827

PART. NO: 51005-胶芯

DWG. NO.:

TITLE: 2.00mm pitch Single Housing

REV: A0	SHEET: 1 / 1
---------	--------------