


环保物料

Pin数	尺寸A	尺寸B
4	7.50	11.00
5	10.00	13.50
6	12.50	16.00
7	15.00	18.50
8	17.50	21.00
9	20.00	23.50
10	22.50	26.00
11	25.00	28.50
12	27.50	31.00
13	30.00	33.50
14	32.50	36.00
15	35.00	38.50
16	37.50	41.00
17	40.00	43.50
18	42.50	46.00
19	45.00	48.50
20	47.50	51.00
21	50.00	53.50
22	52.50	56.00
23	55.00	58.50
24	57.50	61.00
25	60.00	63.50
26	62.50	66.66
27	65.00	68.50

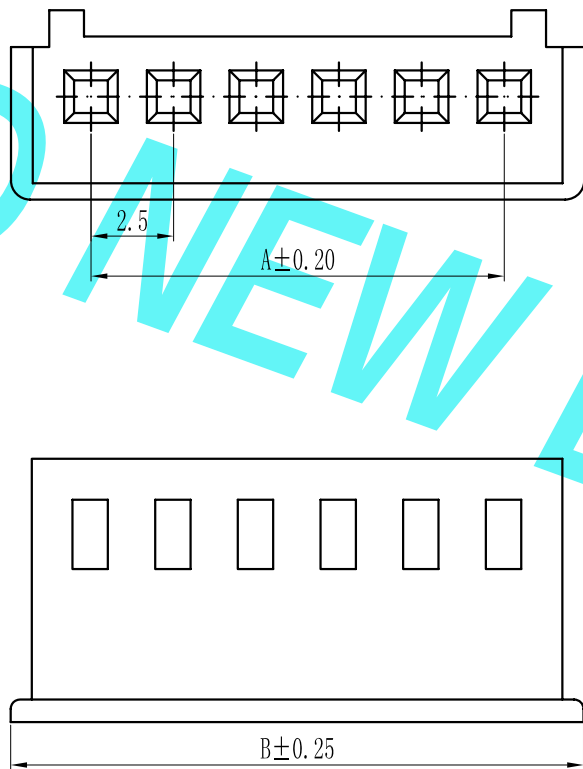

技术参数 SPECIFICATIONS

- ◆间距: 2.5 Pitch:2.5
 - ◆适用线规: AWG#22-#30
Applicable Wire:AWG#22-#30
 - ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
 - ◆额定电流: 3A, AC, DC (AWG#22)
Current rating:3A, AC, DC (AWG#22)
 - ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
 - ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$
 - ◆接触电阻: $\leq 0.02m\Omega$
Contact resistance: $\leq 0.02m\Omega$
- 材料 MATERIAL
- ◆绝缘体: 尼龙66, UL94-V0
Insulator:Nylon66 UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 250-1	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2018.12.06		UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 2.50mm pitch Single Housing
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.06			