
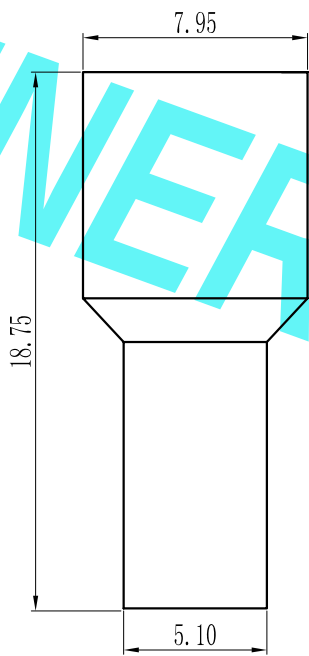
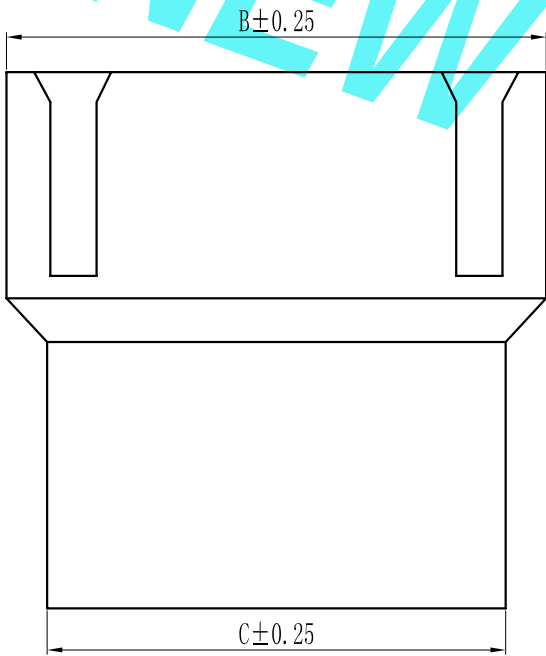


环保物料

Pin数	尺寸A	尺寸B	尺寸C
4	7.50	13.60	10.80
5	10.00	16.10	13.30
6	12.50	18.60	15.80
7	15.00	21.10	18.30
8	17.50	23.60	20.80
9	20.00	26.10	23.30
10	22.50	28.60	25.80
11	25.00	31.10	28.30
12	27.50	33.60	30.80
13	30.00	36.10	33.30
14	32.50	38.60	35.80
15	35.00	41.40	38.30
16	37.50	43.60	40.80
17	40.00	46.10	43.30
18	42.50	48.60	45.80
19	45.00	51.10	48.30
20	47.50	53.60	50.80
21	50.00	56.10	53.30
22	52.50	58.60	55.80
23	55.00	61.10	58.30
24	57.50	63.60	60.80
25	60.00	66.10	63.30
26	62.50	68.60	65.80
27	65.00	71.11	68.30

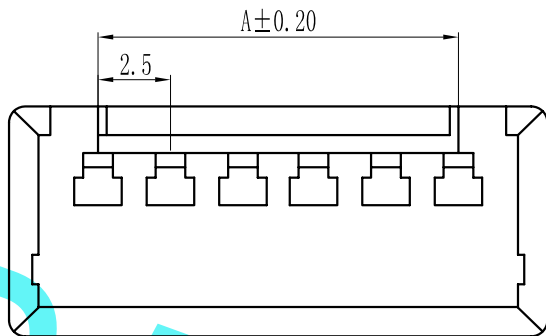

- 技术参数
 SPECIFICATIONS
- ◆间距：2.5 Pitch:2.5
 - ◆适用线规：AWG#22-#30
Applicable Wire:AWG#22-#30
 - ◆额定电压：AC,DC, 250V（有效值）
Voltage rating: AC,DC, 250V(rms)
 - ◆额定电流：3A, AC, DC (AWG#22)
Current rating:3A, AC, DC (AWG#22)
 - ◆耐压值：1000V AC/minute
Withstand voltage:1000V AC/minute
 - ◆工作温度：-25℃~+85℃
Working Temp:-25℃~+85℃
 - ◆绝缘电阻：≥1000MΩ
Insulation resistance:≥1000MΩ
 - ◆接触电阻：≤0.02mΩ
Contact resistance:≤0.02mΩ

- 材料
 MATERIAL
- ◆绝缘体：尼龙66, UL94-V0
Insulator:Nylon66 UL94-V0

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgoonne.cn 公司电话: 0769-85337533 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 5240	
				LINEAR	ANGLES	APPROVED				DWG. NO:	
				0.0±0.25	X° REF±6°	DESIGNER					
AO	新图面发行	2018.12.06	UNIT: MM	0.00±0.15	X° ±3°	TITLE: 2.50mm pitch Single Housing		REV: A0		SHEET: 1/1	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018.12.06			