



环保物料

Pin数	尺寸A	尺寸B
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50
21	50.00	55.00
22	52.50	57.50
23	55.00	60.00
24	57.50	62.50
25	60.00	65.00
26	62.50	67.50
27	65.00	70.00

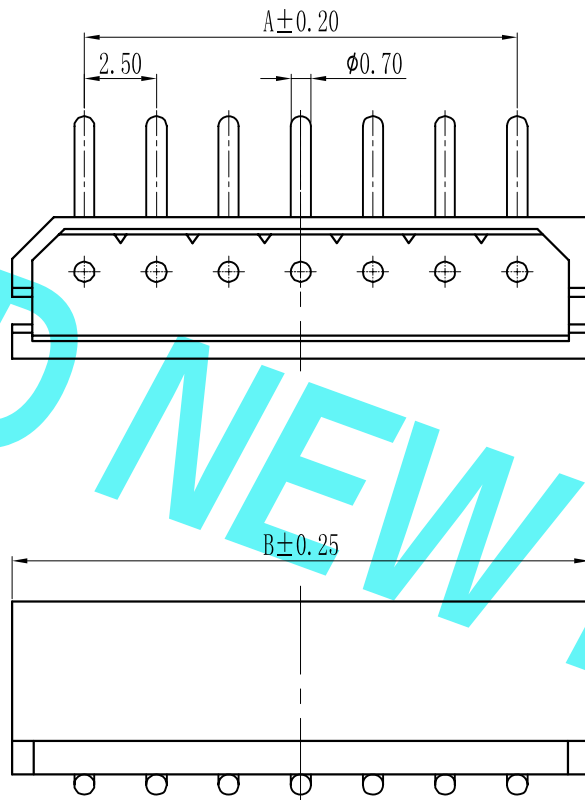

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆间距: 2.5 Pitch:2.5
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC, DC, 250V (有效值)
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 3A, AC, DC (AWG#22)
Current rating:3A, AC, DC (AWG#22)
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度 : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Working Temp: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
- ◆绝缘电阻 : $\geq 1000\text{M}\Omega$
Insulation resistance: $\geq 1000\text{M}\Omega$
- ◆接触电阻: $\leq 20\text{m}\Omega$
Contact resistance: $\leq 20\text{m}\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-V0
Insulator:Nylon66 UL94-V0
- ◆接触针: 黄铜
Contact PIN:Brass

REV.	新图面发行	2018. 12. 06	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	TITLE: 2.50mm pitch Single Wafer	PART. NO: 5246-NAW	
				LINEAR	ANGLES						
				0.0±0.25	X° REF±6°	APPROVED				DWG. NO:	
				0.00±0.15	X° ±3°	DESIGNER				REV: A0	
				0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2018. 12. 06		SHEET: 1/1	


东莞市康导新能源科技有限公司
 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD
 公司网址: www.dgoonne.cn 公司电话: 0769-85337533
 邮箱: 2850175986@qq.com 公司传真: 0769-85392827