
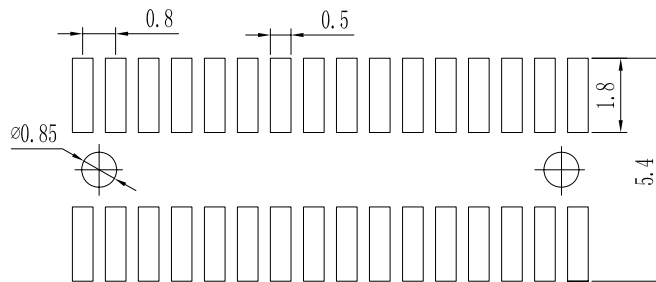

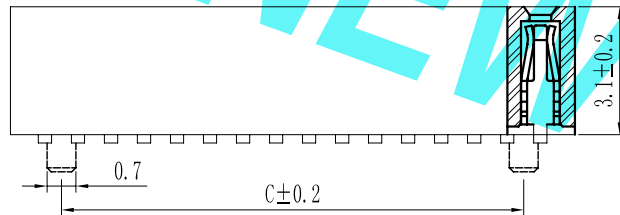



ROHS

For reference only

Pin数	尺寸A	尺寸B	尺寸C
2×2	0.80	1.60	0
2×3	1.60	2.40	0.80
2×4	2.40	3.20	1.60
2×5	3.20	4.00	2.40
2×6	4.00	4.80	3.20
2×7	4.80	5.60	4.00
2×8	5.60	6.40	4.80
2×9	6.40	7.20	5.60
2×10	7.20	8.00	6.40
2×11	8.00	8.80	7.20
2×12	8.80	9.60	8.00
2×13	9.60	10.40	8.80
2×14	10.40	11.20	9.60
2×15	11.20	12.00	10.40
2×16	12.00	12.80	11.22
2×17	12.80	13.60	12.00
2×18	13.60	14.40	12.80
2×19	14.40	15.20	13.60
2×20	15.20	16.00	14.40
2×21	16.00	16.80	15.20
2×22	16.80	17.60	16.00
2×23	17.60	18.40	16.80
2×24	18.40	19.20	17.60
2×25	19.20	20.00	18.40
2×26	20.00	20.80	19.20
2×27	20.80	21.60	20.00
2×28	21.60	22.40	20.80
2×29	22.40	23.20	21.60
2×30	23.20	24.00	22.40
2×31	24.00	24.80	23.20
2×32	24.80	25.60	24.00
2×33	25.60	26.40	25.80
2×34	26.40	27.20	25.60
2×35	27.20	28.00	26.40
2×36	28.00	28.80	27.20
2×37	28.80	29.60	28.00
2×38	29.60	30.40	28.80
2×39	30.40	31.20	29.60
2×40	31.20	32.00	30.40
2×41	32.00	32.80	31.20
2×42	32.80	33.60	32.00
2×43	33.60	34.40	32.80
2×44	34.40	35.20	33.60
2×45	35.20	36.00	34.40
2×46	36.00	36.80	35.20
2×47	36.80	37.60	36.00
2×48	37.60	38.40	36.80
2×49	38.40	39.20	37.60
2×50	39.20	40.00	38.40

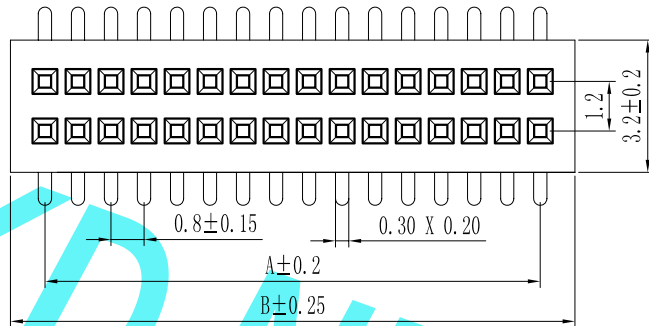

PCB LAYOUT

Specification:

Current Rating : 0.75AMP

Temperature Range : -40℃to+105℃

Contact Resistance : 30mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PA6T/LCP

Contact: Bronze

Plating : Au or Sn Over 50u" Ni

F 08 9S-XXX X X-XX-X-XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail&Mounting Style: 90=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A=PBT B-PA46 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u" 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free)	⑨ Customer Code	



GENERAL TOLERANCES

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

LINEAR

ANGLES

0.0±0.25

X° REF±6°

0.00±0.15

X° ±3°

0.000±0.08

X° X'±2°

UNIT: MM

SIZE: A4

东莞市康号新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD.

Web: www.dgconne.com

Tel: 0769-85337633

Email: 2850175986@qq.com

Fax: 0769-85392827

PART. NO:

KDFH-0001

DWG. NO:

ENDE1001

REV:

A0

SHEET:

1/1

TITLE:
0.8*1.2mm Female Header, Dual Row,
Plastic Height 3.1mm, SMT (with Local Peg) Type(U)