
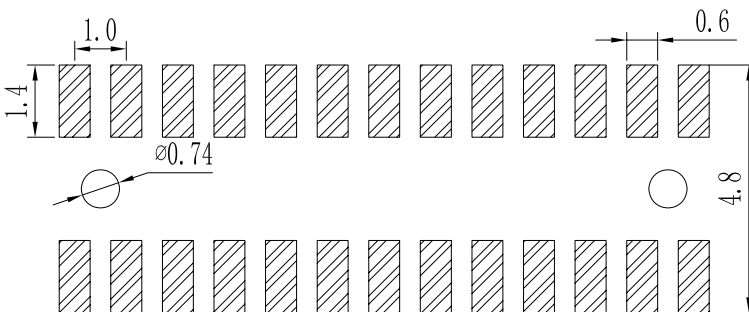

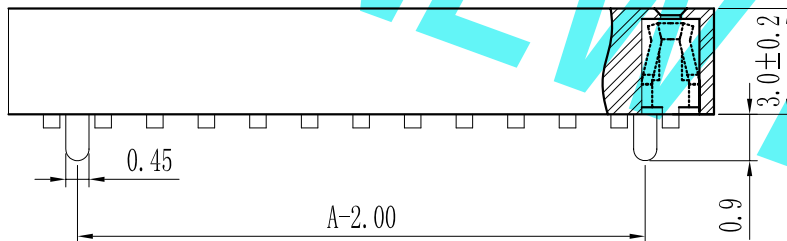



ROHS

For reference only

Pin数	尺寸A	尺寸B
2x2	1.00	2.40
2x3	2.00	3.40
2x4	3.00	4.40
2x5	4.00	5.40
2x6	5.00	6.40
2x7	6.00	7.40
2x8	7.00	8.40
2x9	8.00	9.40
2x10	9.00	10.40
2x11	10.00	11.40
2x12	11.00	12.40
2x13	12.00	13.40
2x14	13.00	14.40
2x15	14.00	15.40
2x16	15.00	16.40
2x17	16.00	17.40
2x18	17.00	18.40
2x19	18.00	19.40
2x20	19.00	20.40
2x21	20.00	21.40
2x22	21.00	22.40
2x23	22.00	23.40
2x24	23.00	24.40
2x25	24.00	25.40
2x26	25.00	26.40
2x27	26.00	27.40
2x28	27.00	28.40
2x29	28.00	29.40
2x30	29.00	30.40
2x31	30.00	31.40
2x32	31.00	32.40
2x33	32.00	33.40
2x34	33.00	34.40
2x35	34.00	35.40
2x36	35.00	36.40
2x37	36.00	37.40
2x38	37.00	38.40
2x39	38.00	39.40
2x40	39.00	40.40
2x41	40.00	41.40
2x42	41.00	42.40
2x43	42.00	43.40
2x44	43.00	44.40
2x45	44.00	45.40
2x46	45.00	46.40
2x47	46.00	47.40
2x48	47.00	48.40
2x49	48.00	49.40
2x50	49.00	50.40

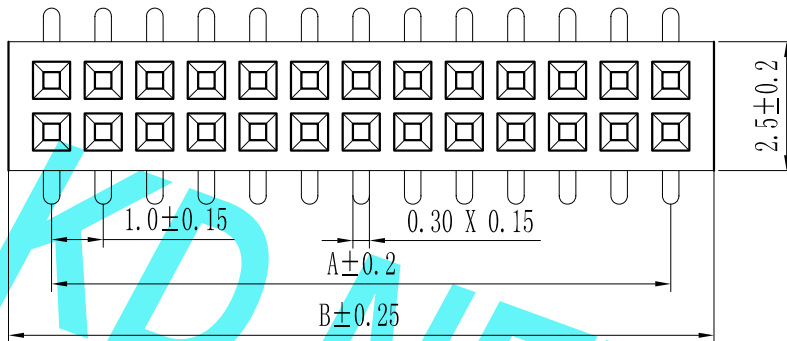

PCB LAYOUT

PC
3.2
3.8
4.1

Specification:

Current Rating : 1AMP

Temperature Range : -40℃to+105℃

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PA6T/LCP

Contact: Bronze

Plating : Au or Sn Over 50u" Ni

F 10 9S-XXX X X-XX-X-XXX

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail&Mounting Style: 90=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brom C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A-PBT B-PA66 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u" 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free)	⑨ Customer Code	

REV.	REVISION RECORD	DATE	SIZE: A4	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES		
				0.0±0.25	X° REF±6°	APPROVED	
				0.00±0.15	X° ±3°	DESIGNER	
				0.000±0.08	X° X'±2°	DRAWN	

东莞市康号新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD.
Web: www.dgconne.com Tel: 0769-85337633
Email: 2850175986@qq.com Fax: 0769-85392827

TITLE:
Pitch1.00mm Female Header, Dual Row,
Plastic Height 3.0mm, SMT (with Local Peg) Type (U)

PART. NO:
KDFH-0015

DWG. NO:
ENDE1015

REV: A0 SHEET: 1/1