

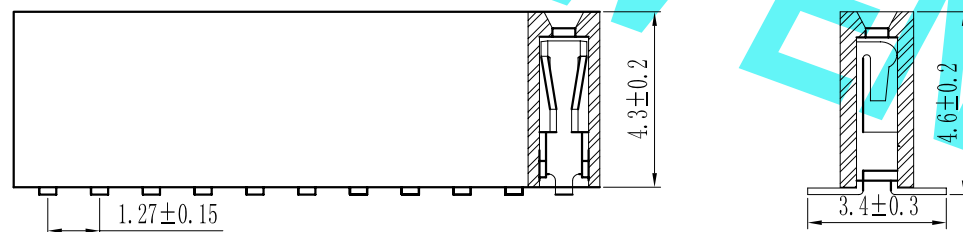
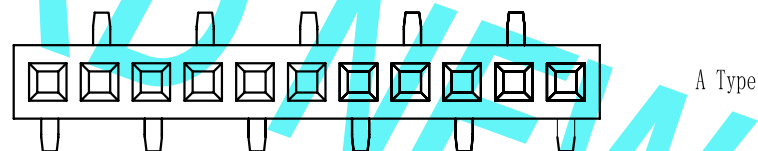


Pin数	尺寸A	尺寸B
1X2	1.27	2.94
1X3	2.54	4.21
1X4	3.81	5.48
1X5	5.08	6.75
1X6	6.35	8.02
1X7	7.62	9.29
1X8	8.89	10.56
1X9	10.16	11.83
1X10	11.43	13.10
1X11	12.70	14.37
1X12	13.97	15.64
1X13	15.24	16.91
1X14	16.51	18.18
1X15	17.78	19.45
1X16	19.05	20.72
1X17	20.32	21.99
1X18	21.59	23.26
1X19	22.86	24.53
1X20	24.13	25.80
1X21	25.40	27.07
1X22	26.67	28.34
1X23	27.94	29.61
1X24	29.21	30.88
1X25	30.48	32.15
1X26	31.75	33.42
1X27	33.02	34.69
1X28	34.29	35.96
1X29	35.56	37.23
1X30	36.83	38.50
1X31	38.10	39.77
1X32	39.37	41.04
1X33	40.64	42.31
1X34	41.91	43.58
1X35	43.18	44.85
1X36	44.45	46.12
1X37	45.72	47.39
1X38	46.99	48.66
1X39	48.26	49.93
1X40	49.53	51.20
1X41	50.80	52.47
1X42	52.07	53.74
1X43	53.34	55.01
1X44	54.61	56.28
1X45	55.88	57.55
1X46	57.15	58.82
1X47	58.42	60.09
1X48	59.69	61.36
1X49	60.96	62.63
1X50	62.23	63.90

Specification:
Current Rating : 1AMP
Temperature Range : -40℃to+105℃
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstanding Voltage : AC 500V
Material:
Insulator : Polyester (UL94V-0)
Standard:PA6T/LCP
Contact: Bronze
Plating : Au or Sn Over 50u" Ni

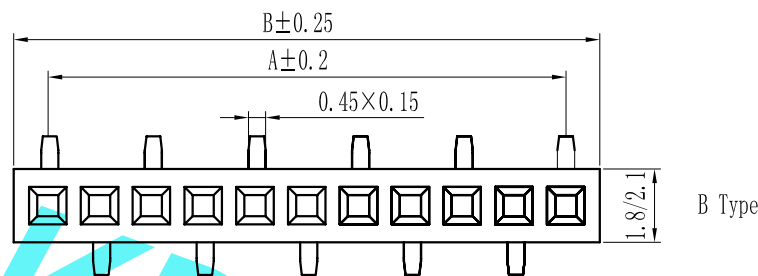

PCB LAYOUT

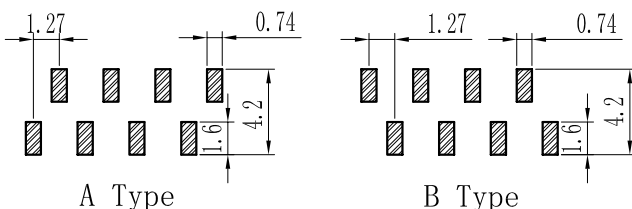

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827	PART. NO: KDFH-0045		
				LINEAR	ANGLES					APPROVED		
				0.0±0.25	X° REF±6°	DESIGNER				ENDE1045		
				UNIT: MM	0.00±0.15	X° ±3°				TITLE: Pitch1.27mm Female Header, Single Row, Plastic Height 4.3mm, SMT Type(0)		
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN			REV: A0 SHEET: 1/1			

TITLE:
Pitch1.27mm Female Header, Single Row,
Plastic Height 4.3mm, SMT Type (0)

PART. NO: KDFH-0045

DWG. NO:	ENDE1045
----------	----------

REV: A0	SHEET: 1 / 1
---------	--------------