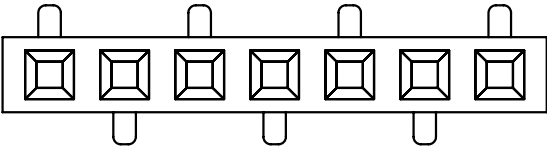
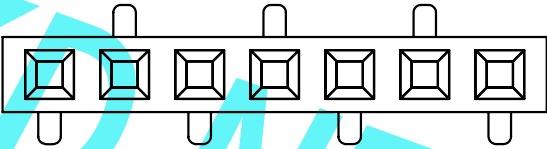
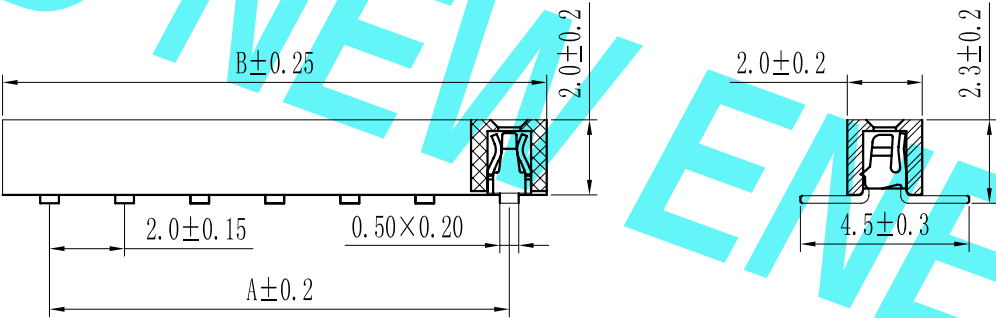
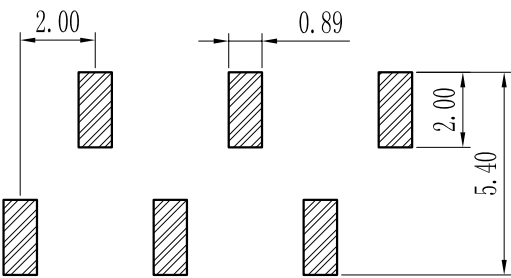
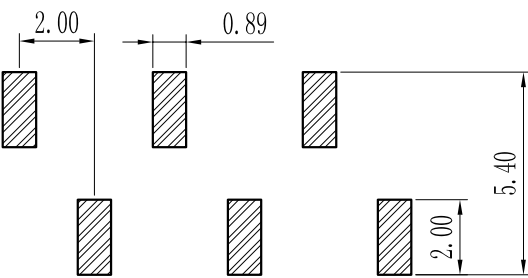


	1	2	3	4	5	6	7	8																																																																																																																																
	ROHS						For reference only																																																																																																																																	
A	<table><tr><td>Pin数</td><td>尺寸A</td><td>尺寸B</td></tr><tr><td>1×2</td><td>2.0</td><td>4.5</td></tr><tr><td>1×3</td><td>4.0</td><td>6.5</td></tr><tr><td>1×4</td><td>6.0</td><td>8.5</td></tr><tr><td>1×5</td><td>8.0</td><td>10.5</td></tr><tr><td>1×6</td><td>10.0</td><td>12.5</td></tr><tr><td>1×7</td><td>12.0</td><td>14.5</td></tr><tr><td>1×8</td><td>14.0</td><td>16.5</td></tr><tr><td>1×9</td><td>16.0</td><td>18.5</td></tr><tr><td>1×10</td><td>18.0</td><td>20.5</td></tr><tr><td>1×11</td><td>20.0</td><td>22.5</td></tr><tr><td>1×12</td><td>22.0</td><td>24.5</td></tr><tr><td>1×13</td><td>24.0</td><td>26.5</td></tr><tr><td>1×14</td><td>26.0</td><td>28.5</td></tr><tr><td>1×15</td><td>28.0</td><td>30.5</td></tr><tr><td>1×16</td><td>30.0</td><td>32.5</td></tr><tr><td>1×17</td><td>32.0</td><td>34.5</td></tr><tr><td>1×18</td><td>34.0</td><td>36.5</td></tr><tr><td>1×19</td><td>36.0</td><td>38.5</td></tr><tr><td>1×20</td><td>38.0</td><td>40.5</td></tr><tr><td>1×21</td><td>40.0</td><td>42.5</td></tr><tr><td>1×22</td><td>42.0</td><td>44.5</td></tr><tr><td>1×23</td><td>44.0</td><td>46.5</td></tr><tr><td>1×24</td><td>46.0</td><td>48.5</td></tr><tr><td>1×25</td><td>48.0</td><td>50.5</td></tr><tr><td>1×26</td><td>50.0</td><td>52.5</td></tr><tr><td>1×27</td><td>52.0</td><td>54.5</td></tr><tr><td>1×28</td><td>54.0</td><td>56.5</td></tr><tr><td>1×29</td><td>56.0</td><td>58.5</td></tr><tr><td>1×30</td><td>58.0</td><td>60.5</td></tr><tr><td>1×31</td><td>60.0</td><td>62.5</td></tr><tr><td>1×32</td><td>62.0</td><td>64.5</td></tr><tr><td>1×33</td><td>64.0</td><td>66.5</td></tr><tr><td>1×34</td><td>66.0</td><td>68.5</td></tr><tr><td>1×35</td><td>68.0</td><td>70.5</td></tr><tr><td>1×36</td><td>70.0</td><td>72.5</td></tr><tr><td>1×37</td><td>72.0</td><td>74.5</td></tr><tr><td>1×38</td><td>74.0</td><td>76.5</td></tr><tr><td>1×39</td><td>76.0</td><td>78.5</td></tr><tr><td>1×40</td><td>78.0</td><td>80.5</td></tr></table>		Pin数	尺寸A	尺寸B	1×2	2.0	4.5	1×3	4.0	6.5	1×4	6.0	8.5	1×5	8.0	10.5	1×6	10.0	12.5	1×7	12.0	14.5	1×8	14.0	16.5	1×9	16.0	18.5	1×10	18.0	20.5	1×11	20.0	22.5	1×12	22.0	24.5	1×13	24.0	26.5	1×14	26.0	28.5	1×15	28.0	30.5	1×16	30.0	32.5	1×17	32.0	34.5	1×18	34.0	36.5	1×19	36.0	38.5	1×20	38.0	40.5	1×21	40.0	42.5	1×22	42.0	44.5	1×23	44.0	46.5	1×24	46.0	48.5	1×25	48.0	50.5	1×26	50.0	52.5	1×27	52.0	54.5	1×28	54.0	56.5	1×29	56.0	58.5	1×30	58.0	60.5	1×31	60.0	62.5	1×32	62.0	64.5	1×33	64.0	66.5	1×34	66.0	68.5	1×35	68.0	70.5	1×36	70.0	72.5	1×37	72.0	74.5	1×38	74.0	76.5	1×39	76.0	78.5	1×40	78.0	80.5			Type 1		Specification: Current Rating : 1.5AMP Temperature Range : -40℃to+105℃ Contact Resistance : 20mΩ Max Insulation Resistance : 1000MΩ Min Withstanding Voltage : AC 500V Material: Insulator : Polyester (UL94V-0) Standard:PA6T/LCP Contact: Bronze Plating : Au or Sn Over 50u" Ni									
Pin数	尺寸A	尺寸B																																																																																																																																						
1×2	2.0	4.5																																																																																																																																						
1×3	4.0	6.5																																																																																																																																						
1×4	6.0	8.5																																																																																																																																						
1×5	8.0	10.5																																																																																																																																						
1×6	10.0	12.5																																																																																																																																						
1×7	12.0	14.5																																																																																																																																						
1×8	14.0	16.5																																																																																																																																						
1×9	16.0	18.5																																																																																																																																						
1×10	18.0	20.5																																																																																																																																						
1×11	20.0	22.5																																																																																																																																						
1×12	22.0	24.5																																																																																																																																						
1×13	24.0	26.5																																																																																																																																						
1×14	26.0	28.5																																																																																																																																						
1×15	28.0	30.5																																																																																																																																						
1×16	30.0	32.5																																																																																																																																						
1×17	32.0	34.5																																																																																																																																						
1×18	34.0	36.5																																																																																																																																						
1×19	36.0	38.5																																																																																																																																						
1×20	38.0	40.5																																																																																																																																						
1×21	40.0	42.5																																																																																																																																						
1×22	42.0	44.5																																																																																																																																						
1×23	44.0	46.5																																																																																																																																						
1×24	46.0	48.5																																																																																																																																						
1×25	48.0	50.5																																																																																																																																						
1×26	50.0	52.5																																																																																																																																						
1×27	52.0	54.5																																																																																																																																						
1×28	54.0	56.5																																																																																																																																						
1×29	56.0	58.5																																																																																																																																						
1×30	58.0	60.5																																																																																																																																						
1×31	60.0	62.5																																																																																																																																						
1×32	62.0	64.5																																																																																																																																						
1×33	64.0	66.5																																																																																																																																						
1×34	66.0	68.5																																																																																																																																						
1×35	68.0	70.5																																																																																																																																						
1×36	70.0	72.5																																																																																																																																						
1×37	72.0	74.5																																																																																																																																						
1×38	74.0	76.5																																																																																																																																						
1×39	76.0	78.5																																																																																																																																						
1×40	78.0	80.5																																																																																																																																						
B					Type 2																																																																																																																																			
C					PCB LAYOUT																																																																																																																																			
D					Type 1																																																																																																																																			
E					Type 2																																																																																																																																			
F	<table><tr><td colspan="8">F 20 9S-XXX X X-XX-X-XXX</td></tr><tr><td>① Series No:</td><td>② Pitch:</td><td>③ Tail&Mounting Style:</td><td>④ No. of Pins:</td><td colspan="4">⑤ Insulator Color:</td></tr><tr><td>P=Pin Header</td><td>08=0.80</td><td>90=Right Angle DIP Type</td><td>Single Row Double Row</td><td colspan="4">A:Black B:Brom C:Red</td></tr><tr><td>F=Female Header</td><td>10=1.00</td><td>9S=Straight SMT Type</td><td>101=1*1Pin 201=2*1Pin</td><td colspan="4">D:Orange E:Yellow F:Green</td></tr><tr><td>B=Box Header</td><td>12=1.27</td><td>0D=Straight DIP Type</td><td>102=1*2Pin 202=2*2Pin</td><td colspan="4">G:Blue H:Violet J:Gray</td></tr><tr><td>E=Ejector Header</td><td>20=2.00</td><td>0S=horizontal SMT Type</td><td>! ! ! !</td><td colspan="4">K:White P:Light Blue</td></tr><tr><td></td><td>25=2.54</td><td></td><td>140=1*40pin 240=2*40pin</td><td colspan="4"></td></tr><tr><td></td><td>39=3.96</td><td></td><td></td><td colspan="4"></td></tr><tr><td></td><td>50=5.08</td><td></td><td></td><td colspan="4"></td></tr><tr><td colspan="2">⑥ Material Type:</td><td>⑦ Plating Type:</td><td>⑧ RoHS Request:</td><td colspan="4">⑨ Customer Code</td></tr><tr><td colspan="2">A=PBT</td><td>0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au</td><td>0:No Request</td><td colspan="4"></td></tr><tr><td colspan="2">B=PA66</td><td>0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"</td><td>1:RoHS</td><td colspan="4"></td></tr><tr><td colspan="2">C=PA6T</td><td>0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"</td><td>2:HF (Halogen Free)</td><td colspan="4"></td></tr><tr><td colspan="2">D=PA9T</td><td>0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"</td><td></td><td colspan="4"></td></tr><tr><td colspan="2">E=LCP</td><td>0D-Sn-Au 4u" 0I-Sn-Au 40u"</td><td></td><td colspan="4"></td></tr><tr><td colspan="2"></td><td>0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"</td><td></td><td colspan="4"></td></tr></table>								F 20 9S-XXX X X-XX-X-XXX								① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:	⑤ Insulator Color:				P=Pin Header	08=0.80	90=Right Angle DIP Type	Single Row Double Row	A:Black B:Brom C:Red				F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin 201=2*1Pin	D:Orange E:Yellow F:Green				B=Box Header	12=1.27	0D=Straight DIP Type	102=1*2Pin 202=2*2Pin	G:Blue H:Violet J:Gray				E=Ejector Header	20=2.00	0S=horizontal SMT Type	! ! ! !	K:White P:Light Blue					25=2.54		140=1*40pin 240=2*40pin						39=3.96								50=5.08							⑥ Material Type:		⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code				A=PBT		0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request					B=PA66		0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS					C=PA6T		0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)					D=PA9T		0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"						E=LCP		0D-Sn-Au 4u" 0I-Sn-Au 40u"								0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"					
F 20 9S-XXX X X-XX-X-XXX																																																																																																																																								
① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:	⑤ Insulator Color:																																																																																																																																				
P=Pin Header	08=0.80	90=Right Angle DIP Type	Single Row Double Row	A:Black B:Brom C:Red																																																																																																																																				
F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin 201=2*1Pin	D:Orange E:Yellow F:Green																																																																																																																																				
B=Box Header	12=1.27	0D=Straight DIP Type	102=1*2Pin 202=2*2Pin	G:Blue H:Violet J:Gray																																																																																																																																				
E=Ejector Header	20=2.00	0S=horizontal SMT Type	! ! ! !	K:White P:Light Blue																																																																																																																																				
	25=2.54		140=1*40pin 240=2*40pin																																																																																																																																					
	39=3.96																																																																																																																																							
	50=5.08																																																																																																																																							
⑥ Material Type:		⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code																																																																																																																																				
A=PBT		0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request																																																																																																																																					
B=PA66		0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS																																																																																																																																					
C=PA6T		0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)																																																																																																																																					
D=PA9T		0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"																																																																																																																																						
E=LCP		0D-Sn-Au 4u" 0I-Sn-Au 40u"																																																																																																																																						
		0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"																																																																																																																																						
G																																																																																																																																								
H	<table><tr><td></td><td></td><td></td><td rowspan="4"></td><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827</td><td>PART. NO:</td></tr><tr><td></td><td></td><td></td><td>LINEAR</td><td>ANGLES</td><td>APPROVED</td><td></td><td></td><td>KDFH-0067</td></tr><tr><td></td><td></td><td></td><td>0.0±0.25</td><td>X° REF±6°</td><td>DESIGNER</td><td></td><td></td><td>DWG. NO:</td></tr><tr><td></td><td></td><td></td><td>0.00±0.15</td><td>X° ±3°</td><td>DRAWN</td><td></td><td></td><td>ENDE1067</td></tr><tr><td>REV.</td><td colspan="2">REVISION RECORD</td><td>DATE</td><td>UNIT: MM</td><td>0.000±0.08</td><td>X° X'±2°</td><td></td><td></td><td></td><td>TITLE: Pitch2.0mm Female Header,Single Row, Plastic Height 2.0mm,SMT Type(U)</td><td>REV: AO SHEET: 1/1</td></tr></table>												GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827	PART. NO:				LINEAR	ANGLES	APPROVED			KDFH-0067				0.0±0.25	X° REF±6°	DESIGNER			DWG. NO:				0.00±0.15	X° ±3°	DRAWN			ENDE1067	REV.	REVISION RECORD		DATE	UNIT: MM	0.000±0.08	X° X'±2°				TITLE: Pitch2.0mm Female Header,Single Row, Plastic Height 2.0mm,SMT Type(U)	REV: AO SHEET: 1/1																																																																														
				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827	PART. NO:																																																																																																																														
				LINEAR	ANGLES	APPROVED				KDFH-0067																																																																																																																														
				0.0±0.25	X° REF±6°	DESIGNER				DWG. NO:																																																																																																																														
				0.00±0.15	X° ±3°	DRAWN				ENDE1067																																																																																																																														
REV.	REVISION RECORD		DATE	UNIT: MM	0.000±0.08	X° X'±2°				TITLE: Pitch2.0mm Female Header,Single Row, Plastic Height 2.0mm,SMT Type(U)	REV: AO SHEET: 1/1																																																																																																																													
	1	2	3	4	5	6	7	8																																																																																																																																