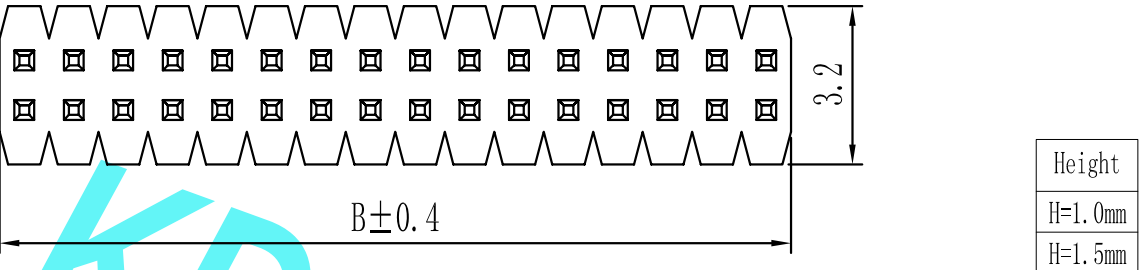
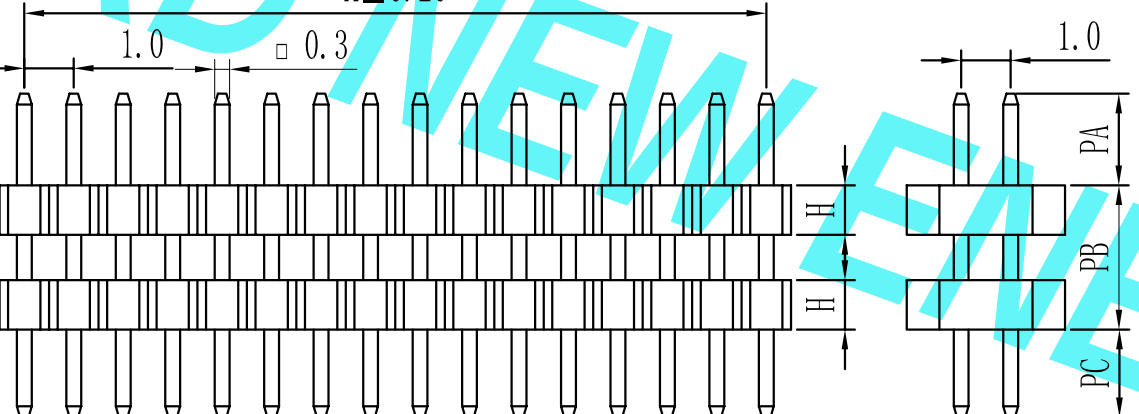
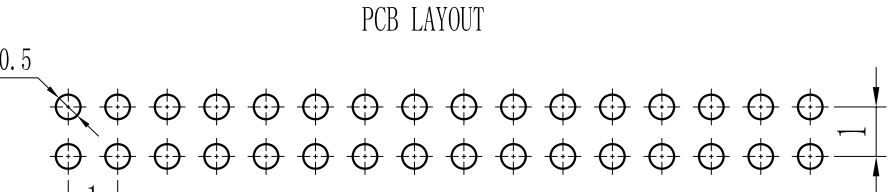


1		2		3		4		5		6		7		8																																																																																																																																																							
ROHS														For reference only																																																																																																																																																							
A		<table><tr><td>Pin数</td><td>尺寸A</td><td>尺寸B</td></tr><tr><td>2×2</td><td>1.0</td><td>2.0</td></tr><tr><td>2×3</td><td>2.0</td><td>3.0</td></tr><tr><td>2×4</td><td>3.0</td><td>4.0</td></tr><tr><td>2×5</td><td>4.0</td><td>5.0</td></tr><tr><td>2×6</td><td>5.0</td><td>6.0</td></tr><tr><td>2×7</td><td>6.0</td><td>7.0</td></tr><tr><td>2×8</td><td>7.0</td><td>8.0</td></tr><tr><td>2×9</td><td>8.0</td><td>9.0</td></tr><tr><td>2×10</td><td>9.0</td><td>10.0</td></tr><tr><td>2×11</td><td>10.0</td><td>11.0</td></tr><tr><td>2×12</td><td>11.0</td><td>12.0</td></tr><tr><td>2×13</td><td>12.0</td><td>13.0</td></tr><tr><td>2×14</td><td>13.0</td><td>14.0</td></tr><tr><td>2×15</td><td>14.0</td><td>15.0</td></tr><tr><td>2×16</td><td>15.0</td><td>16.0</td></tr><tr><td>2×17</td><td>16.0</td><td>17.0</td></tr><tr><td>2×18</td><td>17.0</td><td>18.0</td></tr><tr><td>2×19</td><td>18.0</td><td>19.0</td></tr><tr><td>2×20</td><td>19.0</td><td>20.0</td></tr><tr><td>2×21</td><td>20.0</td><td>21.0</td></tr><tr><td>2×22</td><td>21.0</td><td>22.0</td></tr><tr><td>2×23</td><td>22.0</td><td>23.0</td></tr><tr><td>2×24</td><td>23.0</td><td>24.0</td></tr><tr><td>2×25</td><td>24.0</td><td>25.0</td></tr><tr><td>2×26</td><td>25.0</td><td>26.0</td></tr><tr><td>2×27</td><td>26.0</td><td>27.0</td></tr><tr><td>2×28</td><td>27.0</td><td>28.0</td></tr><tr><td>2×29</td><td>28.0</td><td>29.0</td></tr><tr><td>2×30</td><td>29.0</td><td>30.0</td></tr><tr><td>2×31</td><td>30.0</td><td>31.0</td></tr><tr><td>2×32</td><td>31.0</td><td>32.0</td></tr><tr><td>2×33</td><td>32.0</td><td>33.0</td></tr><tr><td>2×34</td><td>33.0</td><td>34.0</td></tr><tr><td>2×35</td><td>34.0</td><td>35.0</td></tr><tr><td>2×36</td><td>35.0</td><td>36.0</td></tr><tr><td>2×37</td><td>36.0</td><td>37.0</td></tr><tr><td>2×38</td><td>37.0</td><td>38.0</td></tr><tr><td>2×39</td><td>38.0</td><td>39.0</td></tr><tr><td>2×40</td><td>39.0</td><td>40.0</td></tr><tr><td>2×41</td><td>40.0</td><td>41.0</td></tr><tr><td>2×42</td><td>41.0</td><td>42.0</td></tr><tr><td>2×43</td><td>42.0</td><td>43.0</td></tr><tr><td>2×44</td><td>43.0</td><td>44.0</td></tr><tr><td>2×45</td><td>44.0</td><td>45.0</td></tr><tr><td>2×46</td><td>45.0</td><td>46.0</td></tr><tr><td>2×47</td><td>46.0</td><td>47.0</td></tr><tr><td>2×48</td><td>47.0</td><td>48.0</td></tr><tr><td>2×49</td><td>48.0</td><td>49.0</td></tr><tr><td>2×50</td><td>49.0</td><td>50.0</td></tr></table>												Pin数	尺寸A	尺寸B	2×2	1.0	2.0	2×3	2.0	3.0	2×4	3.0	4.0	2×5	4.0	5.0	2×6	5.0	6.0	2×7	6.0	7.0	2×8	7.0	8.0	2×9	8.0	9.0	2×10	9.0	10.0	2×11	10.0	11.0	2×12	11.0	12.0	2×13	12.0	13.0	2×14	13.0	14.0	2×15	14.0	15.0	2×16	15.0	16.0	2×17	16.0	17.0	2×18	17.0	18.0	2×19	18.0	19.0	2×20	19.0	20.0	2×21	20.0	21.0	2×22	21.0	22.0	2×23	22.0	23.0	2×24	23.0	24.0	2×25	24.0	25.0	2×26	25.0	26.0	2×27	26.0	27.0	2×28	27.0	28.0	2×29	28.0	29.0	2×30	29.0	30.0	2×31	30.0	31.0	2×32	31.0	32.0	2×33	32.0	33.0	2×34	33.0	34.0	2×35	34.0	35.0	2×36	35.0	36.0	2×37	36.0	37.0	2×38	37.0	38.0	2×39	38.0	39.0	2×40	39.0	40.0	2×41	40.0	41.0	2×42	41.0	42.0	2×43	42.0	43.0	2×44	43.0	44.0	2×45	44.0	45.0	2×46	45.0	46.0	2×47	46.0	47.0	2×48	47.0	48.0	2×49	48.0	49.0	2×50	49.0	50.0	A	
Pin数	尺寸A	尺寸B																																																																																																																																																																			
2×2	1.0	2.0																																																																																																																																																																			
2×3	2.0	3.0																																																																																																																																																																			
2×4	3.0	4.0																																																																																																																																																																			
2×5	4.0	5.0																																																																																																																																																																			
2×6	5.0	6.0																																																																																																																																																																			
2×7	6.0	7.0																																																																																																																																																																			
2×8	7.0	8.0																																																																																																																																																																			
2×9	8.0	9.0																																																																																																																																																																			
2×10	9.0	10.0																																																																																																																																																																			
2×11	10.0	11.0																																																																																																																																																																			
2×12	11.0	12.0																																																																																																																																																																			
2×13	12.0	13.0																																																																																																																																																																			
2×14	13.0	14.0																																																																																																																																																																			
2×15	14.0	15.0																																																																																																																																																																			
2×16	15.0	16.0																																																																																																																																																																			
2×17	16.0	17.0																																																																																																																																																																			
2×18	17.0	18.0																																																																																																																																																																			
2×19	18.0	19.0																																																																																																																																																																			
2×20	19.0	20.0																																																																																																																																																																			
2×21	20.0	21.0																																																																																																																																																																			
2×22	21.0	22.0																																																																																																																																																																			
2×23	22.0	23.0																																																																																																																																																																			
2×24	23.0	24.0																																																																																																																																																																			
2×25	24.0	25.0																																																																																																																																																																			
2×26	25.0	26.0																																																																																																																																																																			
2×27	26.0	27.0																																																																																																																																																																			
2×28	27.0	28.0																																																																																																																																																																			
2×29	28.0	29.0																																																																																																																																																																			
2×30	29.0	30.0																																																																																																																																																																			
2×31	30.0	31.0																																																																																																																																																																			
2×32	31.0	32.0																																																																																																																																																																			
2×33	32.0	33.0																																																																																																																																																																			
2×34	33.0	34.0																																																																																																																																																																			
2×35	34.0	35.0																																																																																																																																																																			
2×36	35.0	36.0																																																																																																																																																																			
2×37	36.0	37.0																																																																																																																																																																			
2×38	37.0	38.0																																																																																																																																																																			
2×39	38.0	39.0																																																																																																																																																																			
2×40	39.0	40.0																																																																																																																																																																			
2×41	40.0	41.0																																																																																																																																																																			
2×42	41.0	42.0																																																																																																																																																																			
2×43	42.0	43.0																																																																																																																																																																			
2×44	43.0	44.0																																																																																																																																																																			
2×45	44.0	45.0																																																																																																																																																																			
2×46	45.0	46.0																																																																																																																																																																			
2×47	46.0	47.0																																																																																																																																																																			
2×48	47.0	48.0																																																																																																																																																																			
2×49	48.0	49.0																																																																																																																																																																			
2×50	49.0	50.0																																																																																																																																																																			
B		 <table><tr><td>Height</td></tr><tr><td>H=1.0mm</td></tr><tr><td>H=1.5mm</td></tr></table>												Height	H=1.0mm	H=1.5mm	B																																																																																																																																																				
Height																																																																																																																																																																					
H=1.0mm																																																																																																																																																																					
H=1.5mm																																																																																																																																																																					
C														C																																																																																																																																																							
D														D																																																																																																																																																							
E		PCB LAYOUT												E																																																																																																																																																							
F		<table><tr><td>① Series No:</td><td>② Pitch:</td><td>③ Tail&Mounting Style:</td><td>④ No. of Pins:</td><td>⑤ Insulator Color:</td></tr><tr><td>P=Pin Header</td><td>08=0.80</td><td>90=Right Angle DIP Type</td><td>Single Row Double Row</td><td>A:Black B:Brown C:Red</td></tr><tr><td>F=Female Header</td><td>10=1.00</td><td>9S=Straight SMT Type</td><td>101=1*1Pin 201=2*1Pin</td><td>D:Orange E:Yellow F:Green</td></tr><tr><td>B=Box Header</td><td>12=1.27</td><td>00=Straight DIP Type</td><td>102=1*2Pin 202=2*2Pin</td><td>G:Blue H:Violet J:Gray</td></tr><tr><td>E=Injector Header</td><td>20=2.00</td><td>0S=Horizontal SMT Type</td><td>140=1*40pin 240=2*40pin</td><td>K:White P:Light Blue</td></tr><tr><td></td><td>25=2.54</td><td></td><td></td><td></td></tr><tr><td></td><td>30=3.96</td><td></td><td></td><td></td></tr><tr><td></td><td>50=5.08</td><td></td><td></td><td></td></tr></table>												① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:	⑤ Insulator Color:	P=Pin Header	08=0.80	90=Right Angle DIP Type	Single Row Double Row	A:Black B:Brown C:Red	F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin 201=2*1Pin	D:Orange E:Yellow F:Green	B=Box Header	12=1.27	00=Straight DIP Type	102=1*2Pin 202=2*2Pin	G:Blue H:Violet J:Gray	E=Injector Header	20=2.00	0S=Horizontal SMT Type	140=1*40pin 240=2*40pin	K:White P:Light Blue		25=2.54					30=3.96					50=5.08				F																																																																																																															
① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:	⑤ Insulator Color:																																																																																																																																																																	
P=Pin Header	08=0.80	90=Right Angle DIP Type	Single Row Double Row	A:Black B:Brown C:Red																																																																																																																																																																	
F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin 201=2*1Pin	D:Orange E:Yellow F:Green																																																																																																																																																																	
B=Box Header	12=1.27	00=Straight DIP Type	102=1*2Pin 202=2*2Pin	G:Blue H:Violet J:Gray																																																																																																																																																																	
E=Injector Header	20=2.00	0S=Horizontal SMT Type	140=1*40pin 240=2*40pin	K:White P:Light Blue																																																																																																																																																																	
	25=2.54																																																																																																																																																																				
	30=3.96																																																																																																																																																																				
	50=5.08																																																																																																																																																																				
G		<table><tr><td>⑥ Material Type:</td><td>⑦ Plating Type:</td><td>⑧ RoHS Request:</td><td>⑨ Customer Code</td></tr><tr><td>A=PBT</td><td>0#-Sn-Au 1#-Ni 2#-Sn 3#-Matte-Tin 5#-Au</td><td>0:No Request</td><td></td></tr><tr><td>B-PA46</td><td>0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"</td><td>1:RoHS</td><td></td></tr><tr><td>C-PA6T</td><td>0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"</td><td>2:HF (Halogen Free)</td><td></td></tr><tr><td>D-PA9T</td><td>0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"</td><td></td><td></td></tr><tr><td>E-LCP</td><td>0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u"</td><td></td><td></td></tr><tr><td></td><td>0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"</td><td></td><td></td></tr></table>												⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code	A=PBT	0#-Sn-Au 1#-Ni 2#-Sn 3#-Matte-Tin 5#-Au	0:No Request		B-PA46	0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS		C-PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)		D-PA9T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"			E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u"				0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"			G																																																																																																																											
⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code																																																																																																																																																																		
A=PBT	0#-Sn-Au 1#-Ni 2#-Sn 3#-Matte-Tin 5#-Au	0:No Request																																																																																																																																																																			
B-PA46	0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS																																																																																																																																																																			
C-PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)																																																																																																																																																																			
D-PA9T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"																																																																																																																																																																				
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u"																																																																																																																																																																				
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"																																																																																																																																																																				
H		<table><tr><td colspan="2">GENERAL TOLERANCES</td><td>SCALE: 1:1</td><td>NAME</td><td>DATE</td><td rowspan="4">东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827</td><td colspan="2">PART. NO:</td></tr><tr><td colspan="2"></td><td>APPROVED</td><td></td><td></td><td colspan="2">KDPH-0013</td></tr><tr><td colspan="2"></td><td>DESIGNER</td><td></td><td></td><td colspan="2">DWG. NO:</td></tr><tr><td colspan="2"></td><td>DRAWN</td><td></td><td></td><td colspan="2">ENDE0013</td></tr><tr><td>REV.</td><td>REVISION RECORD</td><td>DATE</td><td>UNIT: MM</td><td>SIZE: A4</td><td>0.00±0.08</td><td>X° X'±2°</td><td colspan="2">TITLE: Pitch1.0mm Pin Header, Dual Plastic, Dual Row, DIP</td><td>REV: AO</td><td>SHEET: 1/1</td></tr></table>												GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827	PART. NO:				APPROVED			KDPH-0013				DESIGNER			DWG. NO:				DRAWN			ENDE0013		REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.00±0.08	X° X'±2°	TITLE: Pitch1.0mm Pin Header, Dual Plastic, Dual Row, DIP		REV: AO	SHEET: 1/1	H																																																																																																															
GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827	PART. NO:																																																																																																																																																															
		APPROVED				KDPH-0013																																																																																																																																																															
		DESIGNER				DWG. NO:																																																																																																																																																															
		DRAWN				ENDE0013																																																																																																																																																															
REV.	REVISION RECORD	DATE	UNIT: MM	SIZE: A4	0.00±0.08	X° X'±2°	TITLE: Pitch1.0mm Pin Header, Dual Plastic, Dual Row, DIP		REV: AO	SHEET: 1/1																																																																																																																																																											
1		2		3		4		5		6		7		8																																																																																																																																																							

Specification:
Current Rating : 0.75AMP
Temperature Range : -40℃to+105℃
Contact Resistance : 30mΩ Max
Insulation Resistance : 1000MΩ Min
Withstanding Voltage : AC 500V
Material:
Insulator : Polyester (UL94V-0)
Standard:PBT/PA6T/LCP
Contact: Brass
Plating : Au or Sn Over 50u" Ni