



Pin数	尺寸A	尺寸B	尺寸C
2×5	10.16	21.68	31.90
2×6	12.70	24.22	34.44
2×7	15.24	26.76	36.98
2×8	17.78	29.30	39.52
2×9	20.32	31.84	42.06
2×10	22.86	34.38	44.60
2×11	25.40	36.92	47.14
2×12	27.94	39.46	49.68
2×13	30.48	42.00	52.22
2×14	33.02	44.54	54.76
2×15	35.56	47.08	57.30
2×16	38.10	49.62	59.84
2×17	40.64	52.16	62.38
2×18	43.18	54.70	64.92
2×19	45.72	57.24	67.46
2×20	48.26	59.78	70.00
2×21	50.80	62.32	72.54
2×22	53.34	64.86	75.08
2×23	55.88	67.40	77.62
2×24	58.42	69.94	80.16
2×25	60.96	72.48	82.70
2×26	63.50	75.02	85.24
2×27	66.04	77.56	87.78
2×28	68.58	80.10	90.32
2×29	71.12	82.64	92.86
2×30	73.66	85.18	95.40
2×31	76.20	87.72	97.94
2×32	78.74	90.26	100.48
2×33	81.28	92.80	103.02
2×34	83.82	95.34	105.56
2×35	86.36	97.88	108.10
2×36	88.90	100.42	110.64
2×37	91.44	102.96	113.18
2×38	93.98	105.50	115.72
2×39	96.52	108.04	118.26
2×40	99.06	110.58	120.80

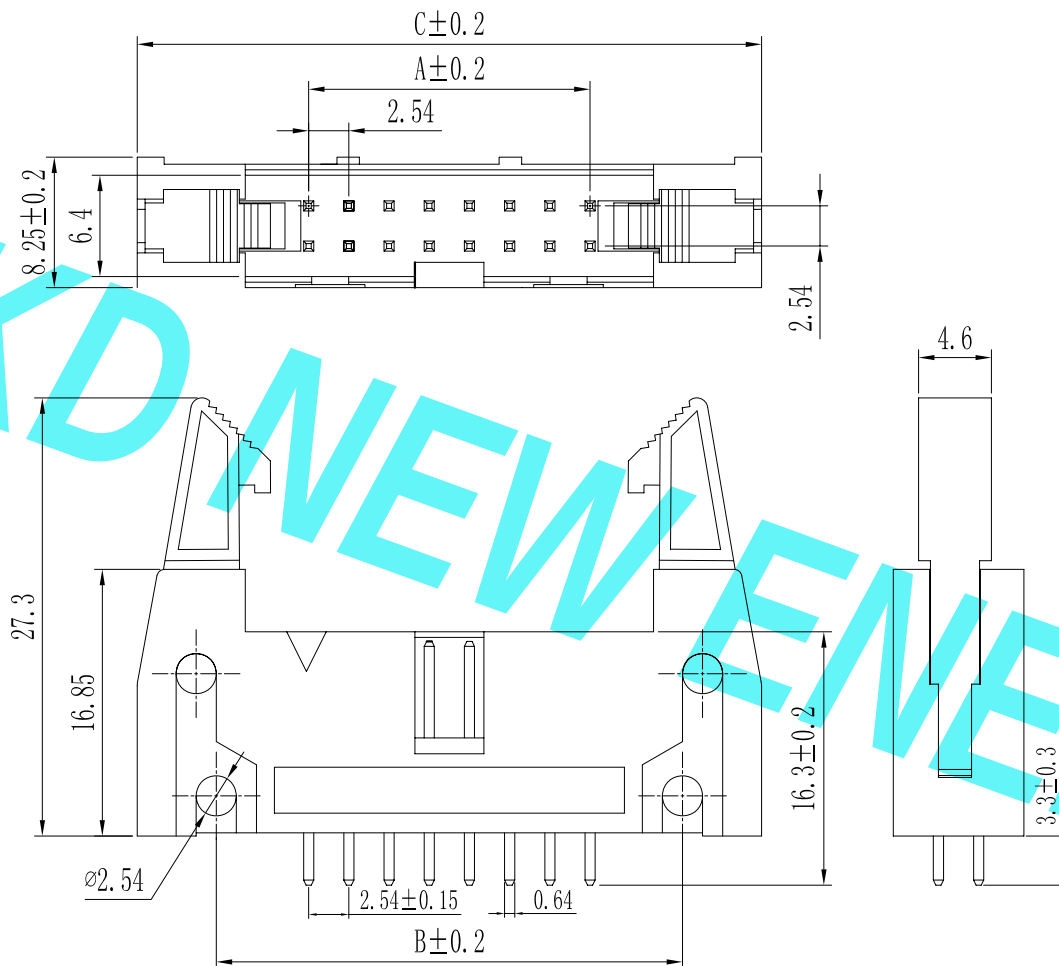

PCB LAYOUT

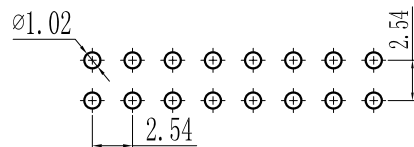

For reference only

Specification:

Current Rating : 3AMP

Temperature Range : -40°C to +105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000M Ω Min

Withstanding Voltage : AC 1000V

Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni

E 25 0D-XXX X X-XX-X-XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail/Mounting Style: 90=Right Angle DIP Type 95=Straight SMT Type 00=Straight DIP Type 05=Horizontal SMT Type	④ No. of Pins: Single Row 101=1*Pin 102=1*2Pin 140=1*40Pin	⑤ Insulator Color: A:Black B:Brown C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A-PBT B-PA46 C-PA67 D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u 0F-Sn-Au 10u 5A-Au 1u 0B-Sn-2u 0G-Sn-Au 15u 5B-Au 2u 0C-Sn-Au 3u 0H-Sn-Au 30u 5C-Au 3u 0D-Sn-Au 4u 0I-Sn-Au 40u 0F-Sn-Au 5u 0J-Sn-Au 50u 5I-Au 50u	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free)	⑨ Customer Code	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827	PART. NO: KDEH-0015		
				LINEAR	ANGLES	APPROVED					DWG. NO: ENDE3015	
				0.0±0.25	X° REF±6°	DESIGNER						
				UNIT: MM	0.00±0.15	X° ±3°						
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN			TITLE: Pitch2.54mm Ejector Header, Dual Row, Plastic Height 16.85mm, DIP		REV: A0	SHEET: 1/1


东莞市康导新能源科技有限公司
 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD.

Web: www.dgconne.com **Tel:** 0769-85337633
Email: 2850175986@qq.com **Fax:** 0769-85392827

TITLE:

Pitch2.54mm Ejector Header, Dual Row,
Plastic Height 16.85mm, DIP

PART. NO:

KDEH-0015

DWG. NO:

ENDE3015

REV: 40

SHEET: 1 / 1