
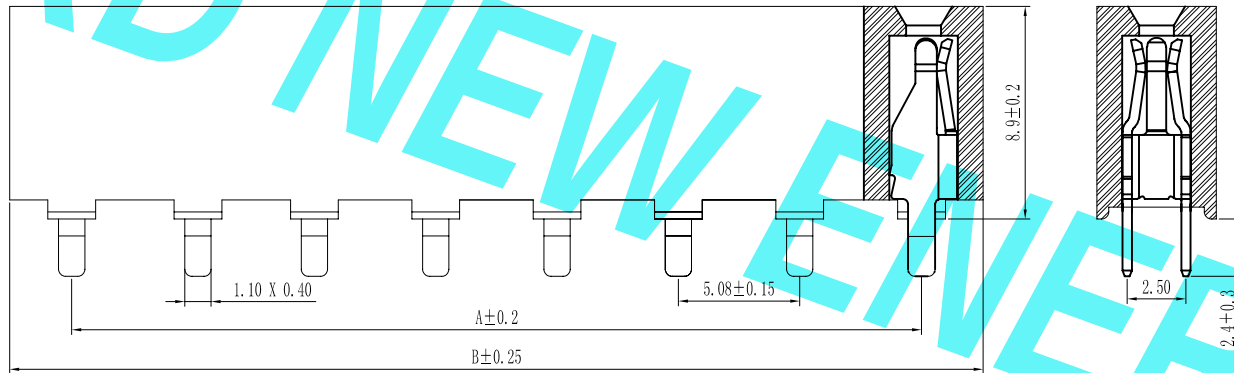



ROHS

For reference only

Pin数	尺寸A	尺寸B
1×2	5.08	10.16
1×3	10.16	15.24
1×4	15.24	20.32
1×5	20.32	25.40
1×6	25.40	30.48
1×7	30.48	35.56
1×8	35.56	40.64
1×9	40.64	45.72
1×10	45.72	50.80
1×11	50.80	55.88
1×12	55.88	60.96
1×13	60.96	66.04
1×14	66.04	71.12
1×15	71.12	76.20
1×16	76.20	81.28
1×17	81.28	86.36
1×18	86.36	91.44
1×19	91.44	96.52
1×20	96.52	101.60
1×21	101.60	106.68
1×22	106.68	111.76
1×23	111.76	116.84
1×24	116.84	121.92
1×25	121.92	127.00
1×26	127.00	132.08
1×27	132.08	137.16
1×28	137.16	142.24
1×29	142.24	147.32
1×30	147.32	152.40
1×31	152.40	157.48
1×32	157.48	162.56
1×33	162.56	167.64
1×34	167.64	172.72
1×35	172.72	177.80
1×36	177.80	182.88
1×37	182.88	187.96
1×38	187.96	193.04
1×39	193.04	198.12
1×40	198.12	203.20

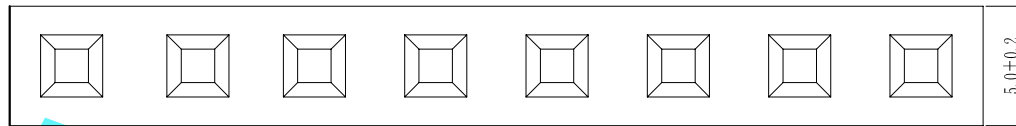

PCB LAYOUT

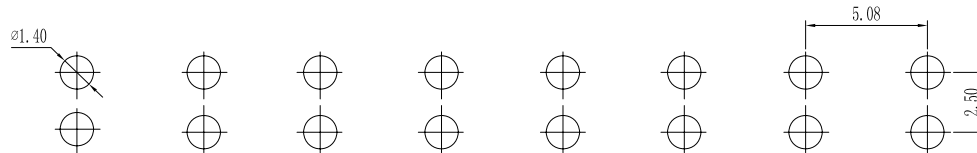

Specification:

Current Rating : 7AMP

Temperature Range : -40℃to+105℃

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Bronze

Plating : Au or Sn Over 50u" Ni

F 50 0D-XXX X X-XX-X-XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail&Mounting Style: 90=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brom C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
⑥ Material Type: A-PBT B-PA46 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u" 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF(Halogen Free)	⑨ Customer Code	

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE
				LINEAR	ANGLES			
				0.0±0.25	X° REF±6°	APPROVED		
				0.00±0.15	X° ±3°	DESIGNER		
				0.000±0.08	X° X'±2°	DRAWN		

东莞市康号新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD.

Web: www.dgconne.com
Email: 2850175986@qq.com

Tel: 0769-85337633
Fax: 0769-85392827

TITLE:
Pitch5.08mm Female Header,Single Row,
Plastic Height 8.9mm,DIP(U)

PART. NO:
KDFH-0215

DWG. NO:
ENDE1215

REV: AO SHEET: 1/1