



Pin数	尺寸A	尺寸B
1×2	2.54	5.58
1×3	5.08	8.12
1×4	7.62	10.66
1×5	10.16	13.20
1×6	12.70	15.74
1×7	15.24	18.28
1×8	17.78	20.82
1×9	20.32	23.36
1×10	22.86	25.90
1×11	25.40	28.44
1×12	27.94	30.98
1×13	30.48	33.52
1×14	33.02	36.06
1×15	35.56	38.60
1×16	38.10	41.14
1×17	40.64	43.68
1×18	43.18	46.22
1×19	45.72	48.76
1×20	48.26	51.30
1×21	50.80	53.84
1×22	53.34	56.38
1×23	55.88	58.92
1×24	58.42	61.46
1×25	60.96	64.00
1×26	63.50	66.54
1×27	66.04	69.08
1×28	68.58	71.62
1×29	71.12	74.16
1×30	73.66	76.70
1×31	76.20	79.24
1×32	78.74	81.78
1×33	81.28	84.32
1×34	83.82	86.86
1×35	86.36	89.40
1×36	88.90	91.94
1×37	91.44	94.48
1×38	93.98	97.02
1×39	96.52	99.56
1×40	99.06	102.10

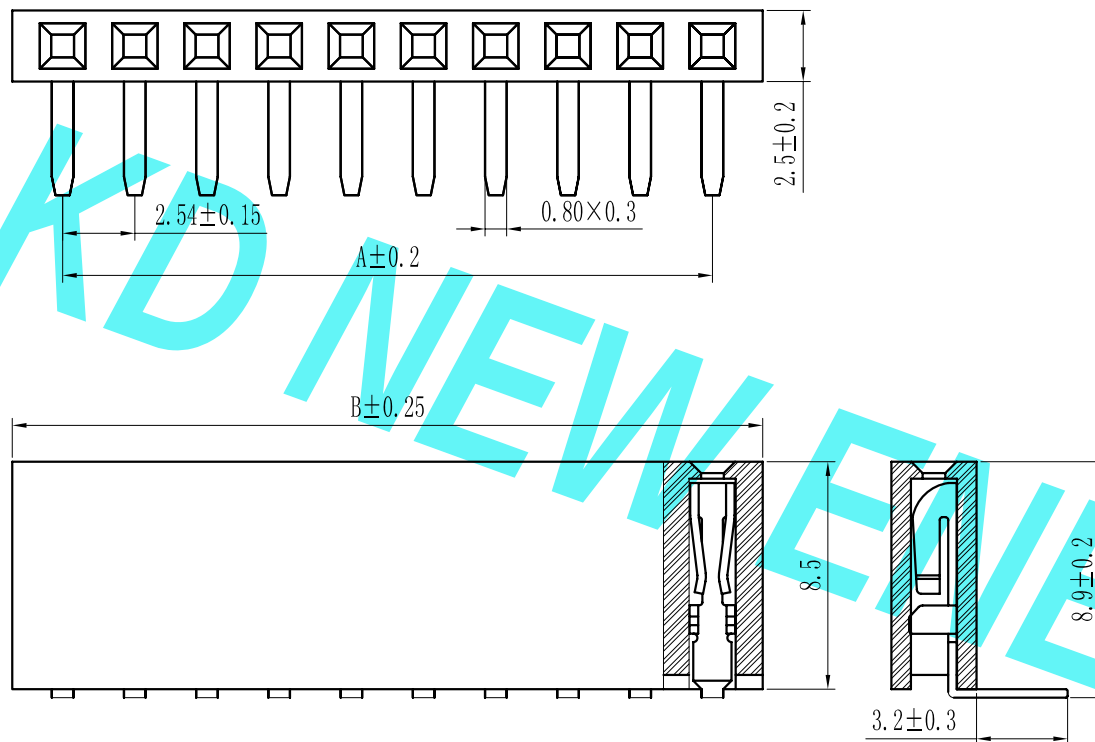

PCB LAYOUT



Specification:

Current Rating : 3AMP

Temperature Range : -40°C to +105°C

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000M Ω Min

Withstanding Voltage : AC 1000V

Material:

Insulator : Polyester (UL94V-0)

Standard:PBT/PA6T/LCP

Contact: Bronze

Plating : Au or Sn Over 50u" Ni

F 25 9D-XXX				X X-XX-X-XXX			
①	②	③	④	⑤	⑥	⑦	⑧
① Series No:	② Pitch:	③ Tail/Mounting Style:	④ No. of Pins:	⑤ Insulator Color:			
P=Pin Header	08=0.80	9D=Right Angle DIP Type	Single Row	A:Black B:Brown C:Red			
F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin	D:Orange E:Yellow F:Green			
B=Box Header	12=1.27	0S=Straight DIP Type	102=1*2Pin	G:Blue H:Violet J:Gray			
E=Ejector Header	20=2.00	0S=Horizontal SMT Type	102=1*2Pin	K:White L:Light Blue			
	25=2.54		140=1*40pin				
	39=3.96		240=1*40pin				
	50=5.08						
① Material Type:	② Plating Type:	③ RoHS Request:		④ Customer Code			
A-PBT	08-Sn-Au 14-Ni 28-Sn 38-Matte-Tin 58-Au	0:No Request					
B-P146	04-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS					
C-PA67	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)					
D-PA97	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"						
E-LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u"						
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"						

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD. Web: www.dgconne.com Tel: 0769-85337633 Email: 2850175986@qq.com Fax: 0769-85392827	PART. NO: KDFH-0184			
				LINEAR	ANGLES	APPROVED					DWG. NO: ENDE1184		
				0. 0±0. 25	X° REF±6°	DESIGNER					REV: A0 SHEET: 1/1		
REV.	REVISION RECORD	DATE		UNIT: MM	0. 00±0. 15	X° ±3°	DRAWN				TITLE: Pitch2.54mm Female Header,Single Row, Plastic Height 8.5mm,Right Angle Type(O)		
			SIZE: A4	0. 000±0. 08	X° X'±2°								