


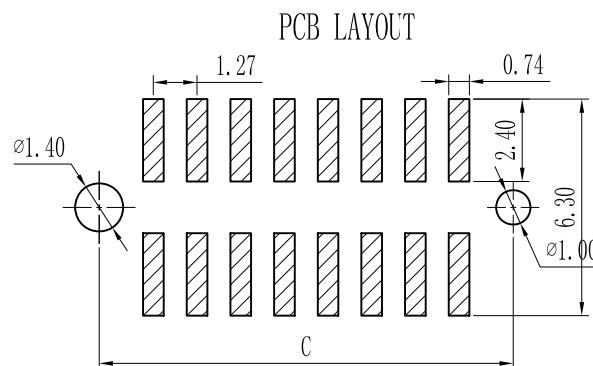


ROHS

For reference only

Pin数	尺寸A	尺寸B	尺寸C
2×5	5.08	9.55	16.33
2×6	6.35	10.82	17.60
2×7	7.62	12.09	18.87
2×8	8.89	13.36	20.14
2×9	10.16	14.63	21.41
2×10	11.43	15.90	22.68
2×11	12.70	17.17	23.95
2×12	13.97	18.44	25.22
2×13	15.24	19.71	26.49
2×14	16.51	20.98	27.76
2×15	17.78	22.25	29.03
2×16	19.05	23.52	30.30
2×17	20.32	24.79	31.57
2×18	21.59	26.06	32.84
2×19	22.86	27.33	34.11
2×20	24.13	28.60	35.38
2×21	25.40	29.87	36.65
2×22	26.67	31.14	37.92
2×23	27.94	32.41	39.19
2×24	29.21	33.68	40.46
2×25	30.48	34.95	41.73
2×26	31.75	36.22	43.00
2×27	33.02	37.49	44.27
2×28	34.29	38.76	45.54
2×29	35.56	40.03	46.81
2×30	36.83	41.30	48.08
2×31	38.10	42.57	49.35
2×32	39.37	43.84	50.62
2×33	40.64	45.11	51.89
2×34	41.91	46.38	53.16
2×35	43.18	47.65	54.43
2×36	44.45	48.92	55.70
2×37	45.72	50.19	56.97
2×38	46.99	51.46	58.24
2×39	48.26	52.73	59.51
2×40	49.53	54.00	60.78
2×41	50.80	55.27	62.05
2×42	52.07	56.54	63.32
2×43	53.34	57.81	64.59
2×44	54.61	59.08	65.86
2×45	55.88	60.35	67.13
2×46	57.15	61.62	68.40
2×47	58.42	62.89	69.67
2×48	59.69	64.16	70.94
2×49	60.96	65.43	72.21
2×50	62.23	66.70	73.48

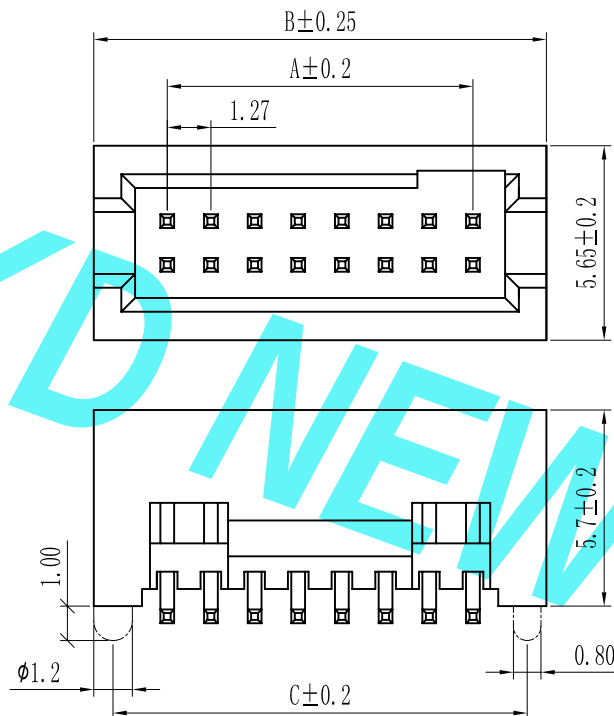

Specification:

Current Rating : 1AMP

Temperature Range : -40℃to+105℃

Contact Resistance : 20mΩ Max

Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Material:

Insulator : Polyester (UL94V-0)

Standard:PA6T/LCP

Contact: Brass

Plating : Au or Sn Over 50u" Ni

B 12 9S-XXX X X-XX-X-XXX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No: P=Pin Header F=Female Header B=Box Header E=Ejector Header	② Pitch: 08=0.80 10=1.00 12=1.27 20=2.00 25=2.54 39=3.96 50=5.08	③ Tail&Mounting Style: 90=Right Angle DIP Type 9S=Straight SMT Type 0D=Straight DIP Type 0S=horizontal SMT Type	④ No. of Pins: Single Row Double Row 101=1*1Pin 201=2*1Pin 102=1*2Pin 202=2*2Pin 140=1*40pin 240=2*40pin	⑤ Insulator Color: A:Black B:Brom C:Red D:Orange E:Yellow F:Green G:Blue H:Violet J:Gray K:White P:Light Blue
---	---	---	--	---

⑥ Material Type: A-PBT B-PA46 C-PA6T D-PA9T E-LCP	⑦ Plating Type: 0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au 0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u" 0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u" 0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u" 0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u" 0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"	⑧ RoHS Request: 0:No Request 1:RoHS 2:HF (Halogen Free)	⑨ Customer Code
--	---	--	-----------------



GENERAL TOLERANCES

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

LINEAR

ANGLES

0.0±0.25

X° REF±6°

0.00±0.15

X° ±3°

0.000±0.08

X° X'±2°

UNIT: MM

SIZE: A4



东莞市康号新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD.

Web: www.dgconne.com
Email: 2850175986@qq.com

Tel: 0769-85337633
Fax: 0769-85392827

PART. NO:

KDBH-0008

DWG. NO:

ENDE2008

REV:

A0

SHEET:

1/1

1

2

3

4

5

6

7

8