


环保物料

Reference Informations:
*Used in 32503 Receptacle Housing

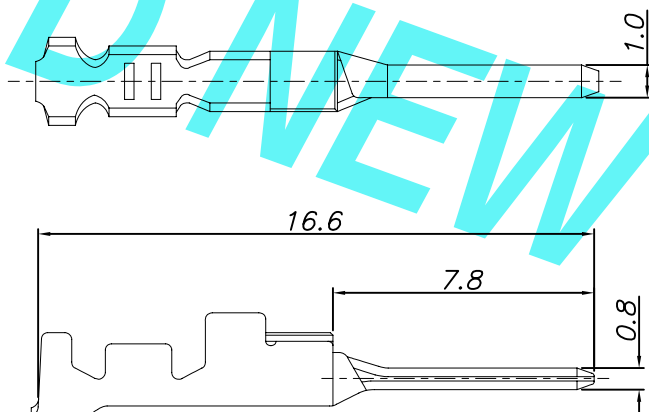

Ordering Information & Specifications

Part No	Wire Range	Insulation O. D.	Material	Finish
32503T 0P-**	AWG#28 -#24	0.88mm-1.43mm (1.43mm max)	Phosphor Bronze	Au or Sn
32503T 1P-**	AWG#24 -#20	1.11mm-1.53mm (1.53mm max)	Phosphor Bronze	Au or Sn
32503T 2P-**	-	1.30mm-1.90mm (1.90mm max)	Phosphor Bronze	Au or Sn
32503T 3P-**	AWG#24 -#20	1.11mm-1.53mm (1.53mm max)	Phosphor Bronze	Au or Sn

Unit: mm

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337633 邮箱: 2850175988@qq.com 公司传真: 0769-85392827	PART. NO: 32503T*P-**
				LINEAR	ANGLES	APPROVED				DWG. NO:
A0	新图面发行	2018.07.28		0.0±0.25	X° REF±6°	DESIGNER				ENDE05
REV.	REVISION RECORD	DATE		0.00±0.15	X° ±3°	DRAWN	肖丽娟	2018.07.28		REV: A0 SHEET: 1/1
			UNIT: MM	0.00±0.08	X° X'±2°				TITLE: 2.50mm pitch Crimp Terminal	