



ROHS

For reference only

Pin数	尺寸A	尺寸B
1		2.54
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.60

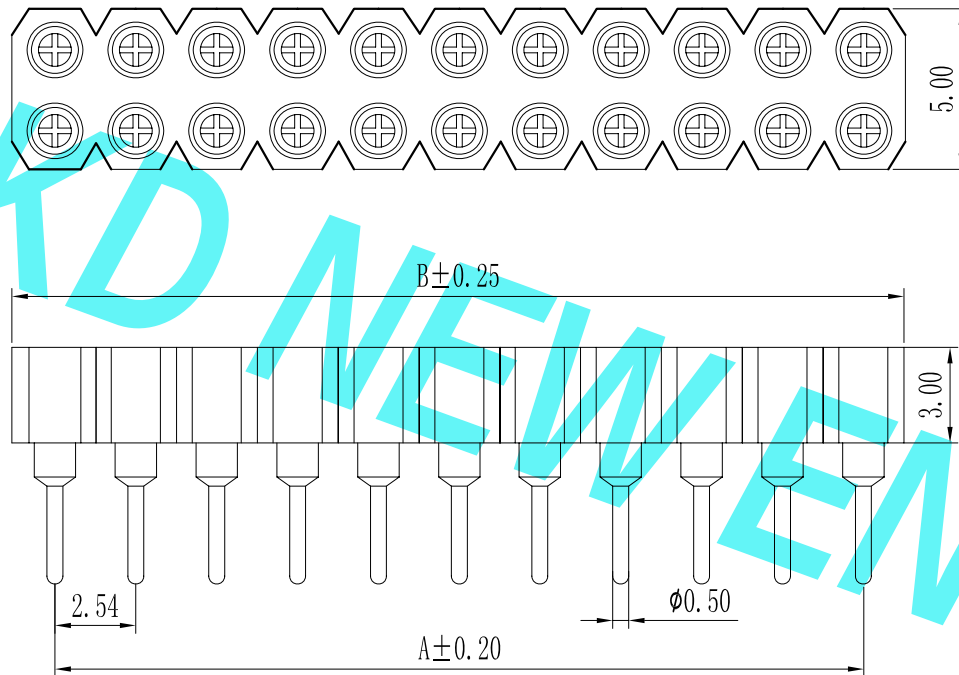

技术规范:
额定电流 : 3AMP
适用温度 : -40℃to+105℃
接触电阻 : 20mΩ Max
绝缘电阻 : 1000MΩ Min
耐电压 : AC 1000V
绝缘材料 : Polyester (UL94V-0)
Standard:PA6T
端子材质 : Brass
电镀规范 : Au or Sn Over 50u" Ni

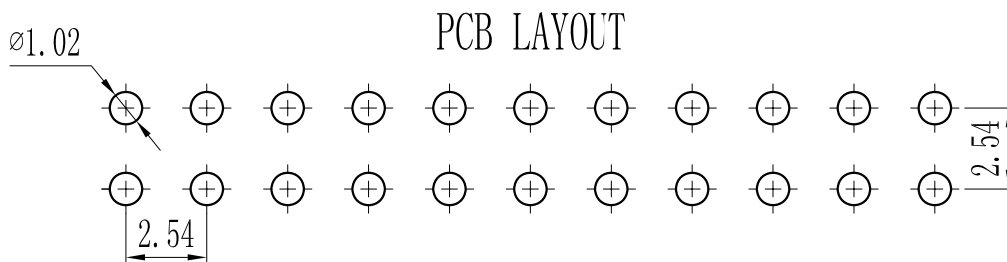

R 25 0D-XXX X X-XX-X-XXX				
① Series No:	② Pitch:	③ Tail&Mounting Style:	④ No. of Pins:	⑤ Insulator Color:
P=Pin Header	08=0.80	90=Right Angle DIP Type	Single Row Double Row	A:Black B:Brom C:Red
F=Female Header	10=1.00	9S=Straight SMT Type	101=1*1Pin 201=2*1Pin	D:Orange E:Yellow F:Green
B=Box Header	12=1.27	0D=Straight DIP Type	102=1*2Pin 202=2*2Pin	G:Blue H:Violet J:Gray
E=Ejector Header	20=2.00	0S=horizontal SMT Type	140=1*40pin 240=2*40pin	K:White P:Light Blue
R=Round Pin	25=2.54			
	39=3.96			
	50=5.08			
⑥ Material Type:	⑦ Plating Type:	⑧ RoHS Request:	⑨ Customer Code	
A=PBT	0*-Sn-Au 1*-Ni 2*-Sn 3*-Matte-Tin 5*-Au	0:No Request		
B=PA46	0A-Sn-Au 1u" 0F-Sn-Au 10u" 5A-Au 1u"	1:RoHS		
C=PA6T	0B-Sn-Au 2u" 0G-Sn-Au 15u" 5B-Au 2u"	2:HF (Halogen Free)		
D=PA9T	0C-Sn-Au 3u" 0H-Sn-Au 30u" 5C-Au 3u"			
E=LCP	0D-Sn-Au 4u" 0I-Sn-Au 40u" 5D-Au 4u"			
	0E-Sn-Au 5u" 0J-Sn-Au 50u" 5J-Au 50u"			

REV.		REVISION RECORD		DATE		UNIT: MM		SIZE: A4		0.000±0.08		X° X'±2°		DRAWN		TITLE:		Pitch2.54mm Female Header, Dual Row, Plastic Height 3.0mm, DIP		PART. NO:		KDRH-0079		DWG. NO:		REV: A0		SHEET: 1/1	
------	--	-----------------	--	------	--	----------	--	----------	--	------------	--	----------	--	-------	--	--------	--	--	--	-----------	--	-----------	--	----------	--	---------	--	------------	--

东莞市康号新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD.
Web: www.dgconne.com Tel: 0769-85337633
Email: 2850175986@qq.com Fax: 0769-85392827