


环保物料

孔位 Poles	A	B	C
4	3.0	5.1	6.0
5	4.0	6.1	7.0
6	5.0	7.1	8.0
7	6.0	8.1	9.0
8	7.0	9.1	10.0
9	8.0	10.1	11.0
10	9.0	11.1	12.0
11	10.0	12.1	13.0
12	11.0	13.1	14.0
13	12.0	14.1	15.0
14	13.0	15.1	16.0
15	14.0	16.1	17.0
16	15.0	17.1	18.0
17	16.0	18.1	19.0
18	17.0	19.1	20.0
19	18.0	20.1	21.0
20	19.0	21.1	22.0
21	20.0	22.1	23.0
22	21.0	23.1	24.0
23	22.0	24.1	25.0
24	23.0	25.1	26.0
25	24.0	26.1	27.0
26	25.0	27.1	28.0
27	26.0	28.1	29.0
28	27.0	29.1	30.0
29	28.0	30.1	31.0
30	29.0	31.1	32.0
31	30.0	32.1	33.0
32	31.0	33.1	34.0
33	32.0	34.1	35.0
34	33.0	35.1	36.0
35	34.0	36.1	37.0
36	35.0	37.1	38.0
37	36.0	38.1	39.0
38	37.0	39.1	40.0
39	38.0	40.1	41.0
40	39.0	41.1	42.0

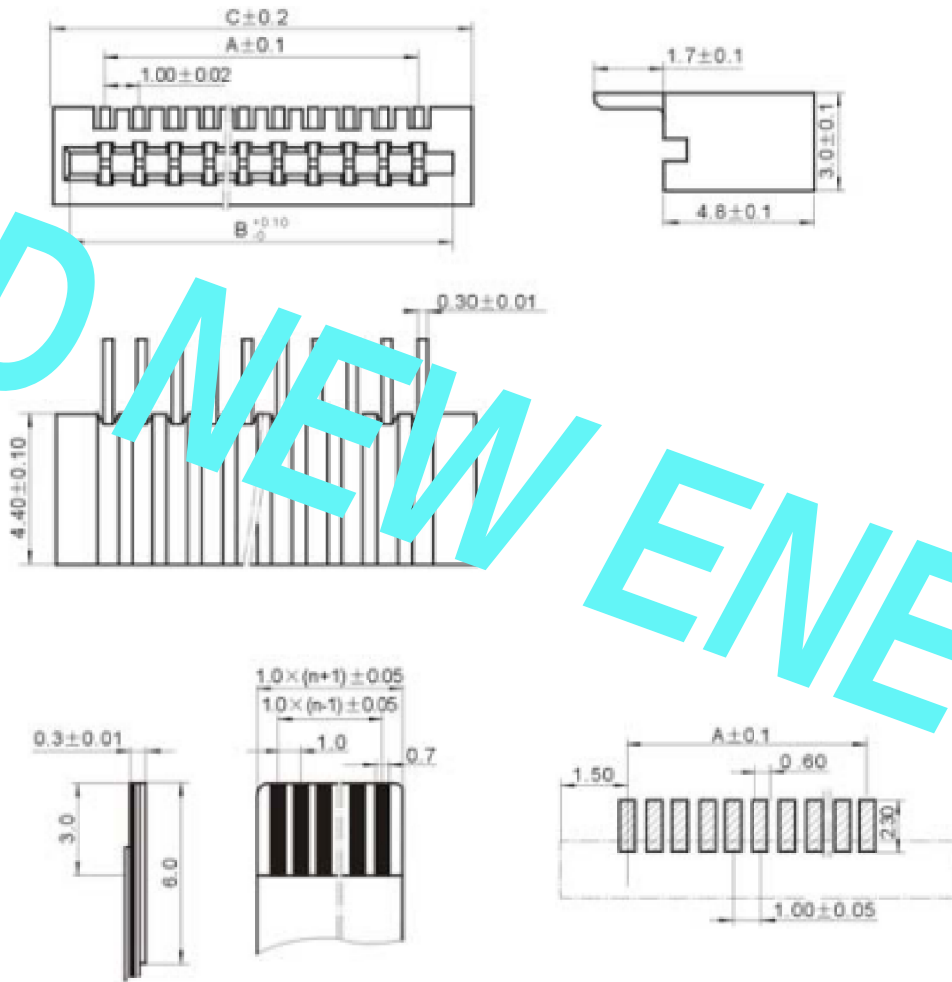

适用扁平电缆
Proper cable

印制线路板
PCB P.C.B Layout

技术参数SPECIFICATIONS

极数: 4~40
Poles: 4~40
额定电压: AC, DC, 50V (50HZ有效值)
Voltage rating: AC, DC, 50V (500HZ有效值)
额定电流: 0.5A, AC, DC
Current rating: 0.5A, AC, DC
耐压值: 500V AC/minute
Withstang voltage: 500V AC/minute
工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
绝缘电阻: ≥800MΩ
Insulation resistance: ≥800MΩ
接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω
双面接触
Dual Contact

接触件TERMINAL


材质: 磷青铜
Material: Phosphor Bronze

胶主料HOUSING

材质: 尼龙4, UL 94V-0
Material: Nylon 4, UL 94V-0

包装方式PACKING

散装 Pipe Package
盒装 Box Package



REV.	新图面发行	2019.01.24	UNIT: MM	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: FPC 1.0B-WT
				LINEAR	ANGLES					
				0.0±0.25	X° REF±6°					
				0.00±0.15	X° ±3°					
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.01.24	TITLE: 1.00mm pitch Single Wafer	DWG. NO: KDFPC-0021
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.01.24	1.00mm pitch Single Wafer	REV: A0 SHEET: 1/1