

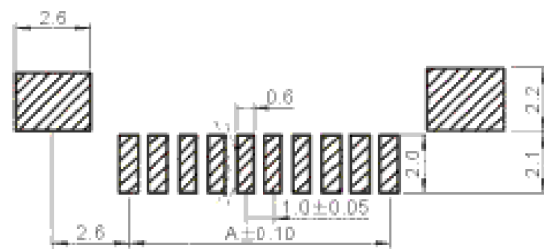



环保物料

孔位 Poles	A	B	C
4	3.0	5.1	6.5
5	4.0	6.1	7.5
6	5.0	7.1	8.5
7	6.0	8.1	9.5
8	7.0	9.1	10.5
9	8.0	10.1	11.5
10	9.0	11.1	12.5
11	10.0	12.1	13.5
12	11.0	13.1	14.5
13	12.0	14.1	15.5
14	13.0	15.1	16.5
15	14.0	16.1	17.5
16	15.0	17.1	18.5
17	16.0	18.1	19.5
18	17.0	19.1	20.5
19	18.0	20.1	21.5
20	19.0	21.1	22.5
21	20.0	22.1	23.5
22	21.0	23.1	24.5
23	22.0	24.1	25.5
24	23.0	25.1	26.5
25	24.0	26.1	27.5
26	25.0	27.1	28.5
27	26.0	28.1	29.5
28	27.0	29.1	30.5
29	28.0	30.1	31.5
30	29.0	31.1	32.5
31	30.0	32.1	33.5
32	31.0	33.1	34.5
33	32.0	34.1	35.5
34	33.0	35.1	36.5
35	34.0	36.1	37.5
36	35.0	37.1	38.5
37	36.0	38.1	39.5
38	37.0	39.1	40.5
39	38.0	40.1	41.5
40	39.0	41.1	42.5

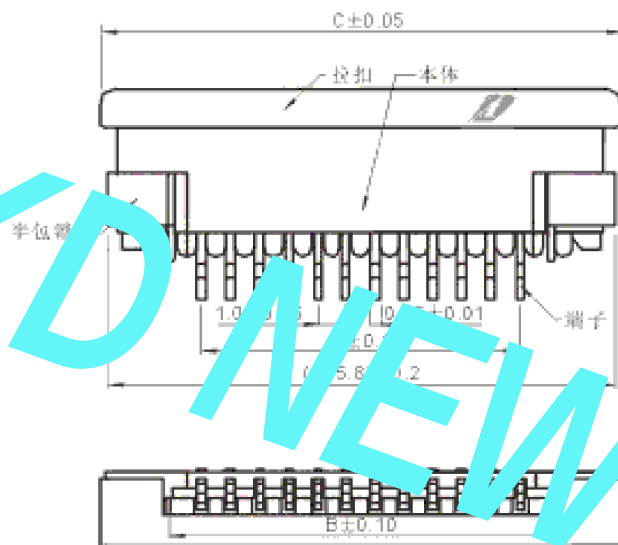

印制线路板
P.C.B. Layout

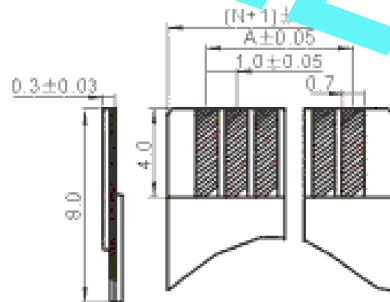


适用扁平电缆
Proper cable

技术参数SPECIFICATIONS

极数: 4~40
Poles: 4~40
额定电压: AC, DC, 50V (50HZ有效值)
Voltage rating: AC, DC, 50V (500HZ有效值)
额定电流: 0.4A, AC, DC
Current rating: 0.4A, AC, DC
耐压值: 200V AC/minute
Withstang voltage: 200V AC/minute
工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
绝缘电阻: $\geq 500\Omega$
Insulation resistance: $\geq 500\Omega$
接触电阻: $\leq 0.02\Omega$
Contact resistance: $\leq 0.02\Omega$
单面接触
Single Contact

接触件TERMINAL

材质: 磷青铜
Material: Phosphor Bronze
胶主料: THERMOPLASTIC
材质: 热塑性塑料, UL 94V-0
Material: Thermoplastic, UL 94V-0
包装形式: PIPE PACKAGE
管袋 Pipe Package

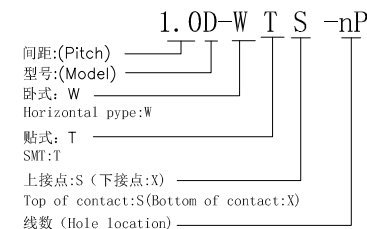

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgcnne.cn 公司电话: 0769-85337633 手机号码: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: FPC 1.0D-WT
				LINEAR	ANGLES	APPROVED				DWG. NO: KDFPC-0023
				0.0 $\pm$ 0.25	X° REF $\pm$ 6°	DESIGNER				REV: A0
A0	新图面发行	2019.01.24	UNIT: MM	0.00 $\pm$ 0.15	X° $\pm$ 3°	DRAWN	肖丽娟	2019.01.24		SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000 $\pm$ 0.08	X° X' $\pm$ 2°				1.00mm pitch Single Wafer	