

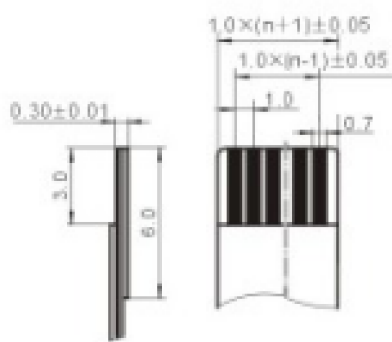


环保物料

孔位 Poles	A	B	C
4	3.0	7.7	5.1
5	4.0	8.7	6.1
6	5.0	9.7	7.1
7	6.0	10.7	8.1
8	7.0	11.7	9.1
9	8.0	12.7	10.1
10	9.0	13.7	11.1
11	10.0	14.7	12.1
12	11.0	15.7	13.1
13	12.0	16.7	14.1
14	13.0	17.7	15.1
15	14.0	18.7	16.1
16	15.0	19.7	17.1
17	16.0	20.7	18.1
18	17.0	21.7	19.1
19	18.0	22.7	20.1
20	19.0	23.7	21.1
21	20.0	24.7	22.1
22	21.0	25.7	23.1
23	22.0	26.7	24.1
24	23.0	27.7	25.1
25	24.0	28.7	26.1
26	25.0	29.7	27.1
27	26.0	30.7	28.1
28	27.0	31.7	29.1
29	28.0	32.7	30.1
30	29.0	33.7	31.1
31	30.0	34.7	32.1
32	31.0	35.7	33.1
33	32.0	36.7	34.1
34	33.0	37.7	35.1
35	34.0	38.7	36.1
36	35.0	39.7	37.1
37	36.0	40.7	38.1
38	37.0	41.7	39.1
39	38.0	42.7	40.1
40	39.0	43.7	41.1

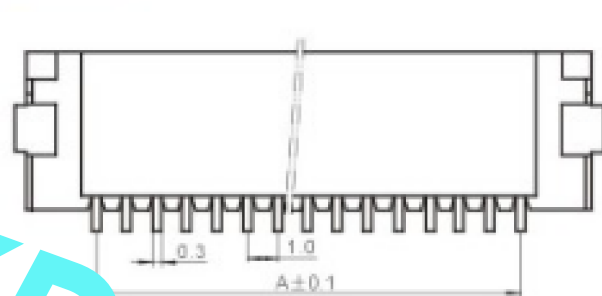

适用扁平电缆
Proper cable

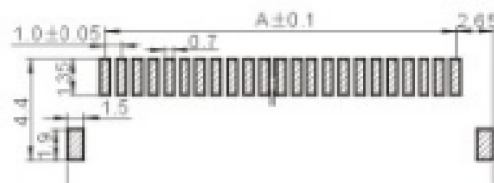

印制线路板
P.C.B Layout

技术参数SPECIFICATIONS

极数: 4~40
Poles: 4~40
额定电压: AC, DC, 50V (50HZ有效值)
Voltage rating: AC, DC, 50V (500HZ有效值)
额定电流: 0.5A, AC, DC
Current rating: 0.5A, AC, DC
耐压值: 500V AC/minute
Withstang voltage: 500V AC/minute
工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
绝缘电阻: ≥800MΩ
Insulation resistance: ≥800MΩ
接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω
双面接触
Dual Contact

接触件TERMINAL


材质: 磷青铜
Material: Phosphor Bronze

胶主料INSULATING

材质: 尼龙4, UL 94V-0
Material: Nylon 4, UL 94V-0

包装方式PACKING

管袋 Pipe Package
袋装 Bag Package



				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: FPC 1.0E-WT	
				LINEAR	ANGLES	APPROVED					
				0.0±0.25	X° REF±6°	DESIGNER		DWG. NO: KDFPC-0024			
AO	新图面发行	2019.01.24		UNIT: MM	0.00±0.15	X° ±3°		TITLE: 1.00mm pitch Single Wafer		REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.01.24			