



孔位 Poles	A	B	C	D
2	1.0	3.1	6.85	8.2
3	2.0	4.1	7.85	9.2
4	3.0	5.1	8.85	10.2
5	4.0	6.1	9.85	11.2
6	5.0	7.1	10.85	12.2
7	6.0	8.1	11.85	13.2
8	7.0	9.1	12.85	14.2
9	8.0	10.1	13.85	15.2
10	9.0	11.1	14.85	16.2
11	10.0	12.1	15.85	17.2
12	11.0	13.1	16.85	18.2
13	12.0	14.1	17.85	19.2
14	13.0	15.1	18.85	20.2
15	14.0	16.1	19.85	21.2
16	15.0	17.1	20.85	22.2
17	16.0	18.1	21.85	23.2
18	17.0	19.1	22.85	24.2
19	18.0	20.1	23.85	25.2
20	19.0	21.1	24.85	26.2
21	20.0	22.1	25.85	27.2
22	21.0	23.1	26.85	28.2
23	22.0	24.1	27.85	29.2
24	23.0	25.1	28.85	30.2
25	24.0	26.1	29.85	31.2

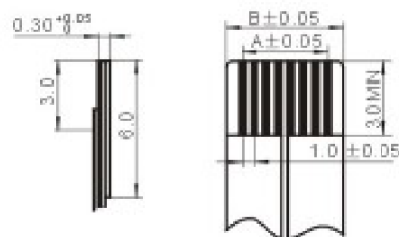

适用扁平电缆
Proper cable

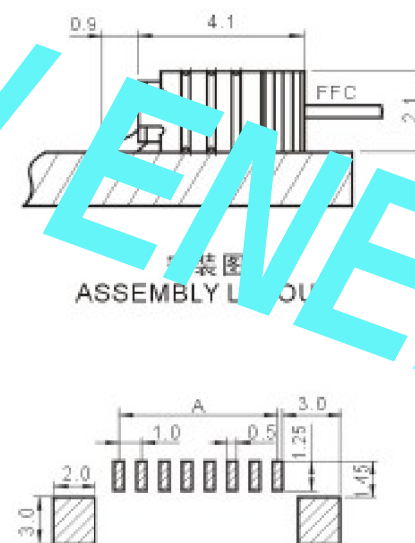


印制线路板
PCB P.C.B Layout

极数: 2~25
Poles: 2~25
额定电压: AC, DC, 50V (50HZ有效值)
Voltage rating: AC, DC, 50V (500HZ有效值)
额定电流: 0. 4A, AC, DC
Current rating: 0. 4A, AC, DC
耐压值: 500V AC/minute
Withstang voltage: 500V AC/minute
工作温度: -25℃ ~+85℃
Working Temperature: -25℃ ~+85℃
绝缘电阻: $\geq 800\text{M}\Omega$
Insulation resistance: $\geq 800\text{M}\Omega$
接触电阻: $\leq 0. 02\Omega$
Contact resistance: $\leq 0. 02\Omega$
单面接触
Single Contact

材质: 磷青铜
Material: Phosphor Bronze
胶主料: MOUSING
材质: 尼龙4, UL 94V-0
Material: Nylon 4, UL 94V-0
包装: 式PACK

带包装: Tape and Reel Package
 管装: Pipe Package
 袋装: Bag Package

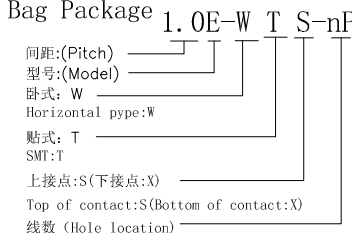

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392627	PART. NO: FPC 1.0F-WT	
				LINEAR	ANGLES	APPROVED				DWG. NO: KDFPC-0025	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2019.01.24	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER			TITLE: 1.00mm pitch Single Wafer	REV: A0	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.01.24		SHEET: 1/1	

 **东莞市康导新能源科技有限公司**
DONGGUAN KDG NEW ENERGY TECHNOLOGY CO., LTD

公司网址: www.dgcnne.cn 公司电话: 0769-85337633
销售热线: 2850175986@qq.com 公司传真: 0769-45392827

PART. NO:		FPC 1.0F-WT	
DWG. NO:		KDFPC-0025	
REV:	AO	SHEET:	1 / 1