


环保物料

REV. Point	A	B	C
4	3.0	5.1	8.9
5	4.0	6.1	9.9
6	5.0	7.1	10.9
7	6.0	8.1	11.9
8	7.0	9.1	12.9
9	8.0	10.1	13.9
10	9.0	11.1	14.9
11	10.0	12.1	15.9
12	11.0	13.1	16.9
13	12.0	14.1	17.9
14	13.0	15.1	18.9
15	14.0	16.1	19.9
16	15.0	17.1	20.9
17	16.0	18.1	21.9
18	17.0	19.1	22.9
19	18.0	20.1	23.9
20	19.0	21.1	24.9
21	20.0	22.1	25.9
22	21.0	23.1	26.9
23	22.0	24.1	27.9
24	23.0	25.1	28.9
25	24.0	26.1	29.9
26	25.0	27.1	30.9
27	26.0	28.1	31.9
28	27.0	29.1	32.9
29	28.0	30.1	33.9
30	29.0	31.1	34.9
31	30.0	32.1	35.9
32	31.0	33.1	36.9
33	32.0	34.1	37.9
34	33.0	35.1	38.9
35	34.0	36.1	39.9
36	35.0	37.1	40.9
37	36.0	38.1	41.9
38	37.0	39.1	42.9
39	38.0	40.1	43.9
40	39.0	41.1	44.9
41	40.0	42.1	45.9
42	41.0	43.1	46.9
43	42.0	44.1	47.9
44	43.0	45.1	48.9
45	44.0	46.1	49.9
46	45.0	47.1	50.9
47	46.0	48.1	51.9
48	47.0	49.1	52.9
49	48.0	50.1	53.9
50	49.0	51.1	54.9
51	50.0	52.1	55.9
52	51.0	53.1	56.9
53	52.0	54.1	57.9
54	53.0	55.1	58.9
55	54.0	56.1	59.9
56	55.0	57.1	60.9
57	56.0	58.1	61.9
58	57.0	59.1	62.9
59	58.0	60.1	63.9
60	59.0	61.1	64.9

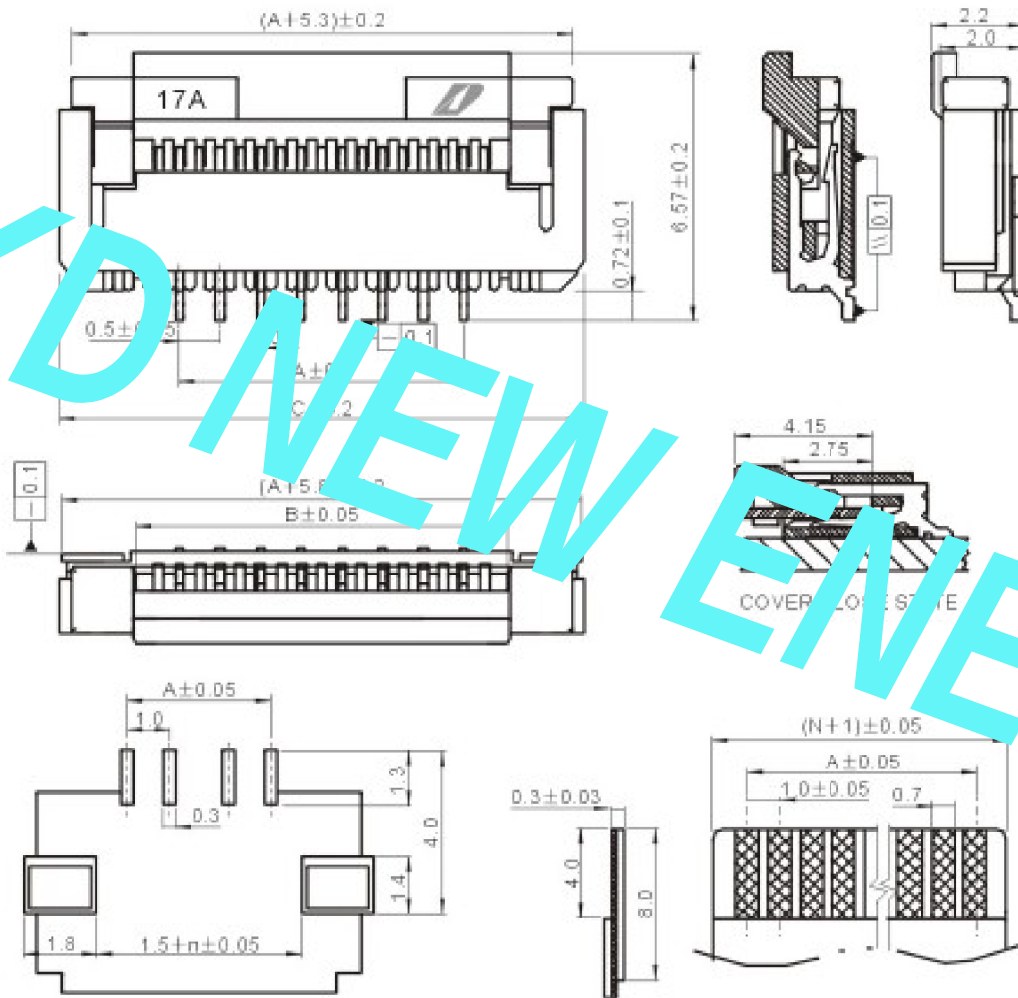

适用扁平电缆
Proper cable

技术参数SPECIFICATIONS

极数: 4~60
Poles: 4~60
额定电压: AC, DC, 50V (50HZ有效值)
Voltage rating: AC, DC, 50V (500HZ有效值)
额定电流: 0. 4A, AC, DC
Current rating: 0. 4A, AC, DC
耐压值: 200V AC/minute
Withstang voltage: 200V AC/minute
工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
绝缘电阻: ≥500MΩ
Insulation resistance: ≥500MΩ
接触电阻: ≤0. 02Ω
Contact resistance: ≤0. 02Ω
单面接触
Single Contact

接触件TERMINAL

材质: 磷青铜
Material: Phosphor Bronze
胶主料: THERMOPLASTIC
材质: 热塑性塑料, UL 94V-0
Material: Thermoplastic, UL 94V-0
包装形式: PIPE PACKAGE
管袋 Pipe Package

1. 0G-W T X-nP
间距: (Pitch)
型号: (Model)
卧式: W
Horizontal pype: W
贴式: T
SMT: T
下接点: X
Bottom of contact: X
线数 (Hole location)

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgkonne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO:	FPC 1.0G-WT	
				LINEAR	ANGLES	APPROVED				DWG. NO:		
				0.0±0.25	X° REF±6°	DESIGNER				TITLE:	KDFPC-0026	
AO	新图面发行	2019.01.24	UNIT: MM	0.00±0.15	X° ±3°				1.00mm pitch Single Wafer	REV:	A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.01.24				