

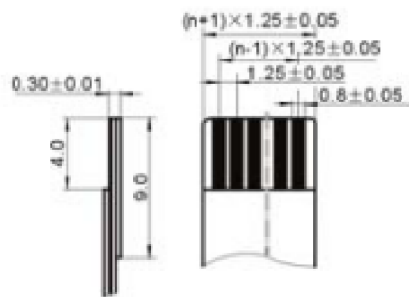
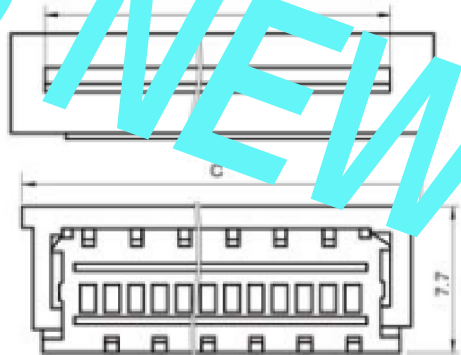



环保物料

孔位 Poles	A	B	C
4	6.25	3.75	9.0
5	7.5	5.0	10.25
6	8.75	6.25	11.5
7	10.0	7.5	12.75
8	11.25	8.75	14.0
9	12.5	10.0	15.25
10	13.75	11.25	16.5
11	15.0	12.5	17.75
12	16.25	13.75	19.0
13	17.5	15.0	20.25
14	18.75	16.25	21.5
15	20.0	17.5	22.75
16	21.25	18.75	24.0
17	22.5	20.0	25.25
18	23.75	21.25	26.5
19	25.0	22.5	27.75
20	26.25	23.75	29.0
21	27.5	25.0	30.25
22	28.75	26.25	31.5
23	30.0	27.5	32.75
24	31.25	28.75	34.0
25	32.5	30.0	35.25
26	33.75	31.25	36.5
27	35.0	32.5	37.75
28	36.25	33.75	39.0
29	37.5	35.0	40.25
30	38.75	36.25	41.5
31	40.0	37.5	42.75
32	41.25	38.75	44.0
33	42.5	40.0	45.25
34	43.75	41.25	46.5
35	45.0	42.5	47.75
36	46.25	43.75	49.0
37	47.5	45.0	50.25
38	48.75	46.25	51.5
39	50.0	47.5	52.75
40	51.25	48.75	54.0

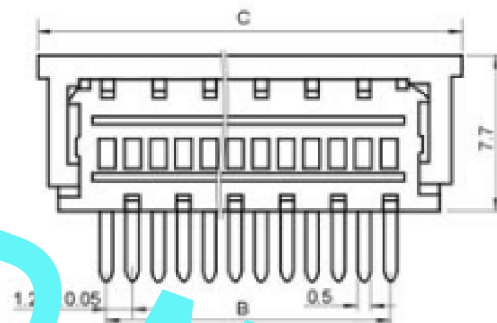

适用扁平电缆
Proper cable

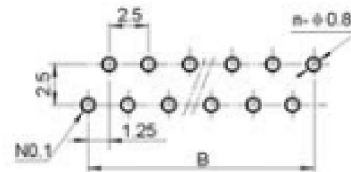

印制线路板
P.C.B Layout

技术参数SPECIFICATIONS

极数: 4~40
Poles: 4~40
额定电压: AC, DC, 50V (50HZ有效值)
Voltage rating: AC, DC, 50V (500HZ有效值)
额定电流: 0. 5A, AC, DC
Current rating: 0. 5A, AC, DC
耐压值: 500V AC/minute
Withstang voltage: 500V AC/minute
工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
绝缘电阻: ≥800MΩ
Insulation resistance: ≥800MΩ
接触电阻: ≤0. 02Ω
Contact resistance: ≤0. 02Ω
单面接触
Single Contact

接触件TERMINAL

材质: 磷青铜
Material: Phosphor Bronze

塑料壳体HOUSING

材质: 尼龙46 UL 94V-0
Material: Nylon46 UL 94V-0

包装PACKAGE

管状 Pipe package
袋装 Bag package

1. 25B-W-nP
间距:(Pitch)
型号:(Model)
卧式: W
Horizontal pype: W
线数 (Hole location)

				GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgcnne.cn 公司电话: 0769-85337633 蜂 蜂: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: FPC 1.25B-W
				LINEAR	ANGLES	APPROVED			DWG. NO: KDFPC-0036
				0. 0±0. 25	X° REF±6°	DESIGNER			REV: A0
A0	新图面发行	2019. 01. 25	UNIT: MM	0. 00±0. 15	X° ±3°	DRAWN	肖丽娟	2019. 01. 25	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X' ±2°				