


环保物料


孔位 Poles	A	B	C	D	E
3	2.50	5.10	8.80	7.20	8.30
4	3.75	6.35	10.05	8.45	9.55
5	5.00	7.60	11.30	9.70	10.80
6	6.25	8.85	12.55	10.95	12.05
7	7.50	10.00	13.80	12.20	13.30
8	8.75	11.35	15.05	13.45	14.55
9	10.00	12.60	16.30	14.70	15.80
10	11.25	13.85	17.55	15.95	17.05
11	12.50	15.10	18.80	17.20	18.30
12	13.75	16.35	20.05	18.45	19.55
13	15.00	17.60	21.30	19.70	20.80
14	16.25	18.85	22.55	20.95	22.05
15	17.50	20.10	23.80	22.20	23.30
16	18.75	21.35	25.05	23.45	24.55
17	20.00	22.60	26.30	24.70	25.80
18	21.25	23.85	27.55	25.95	27.05
19	22.50	25.10	28.80	27.20	28.30
20	23.75	26.35	30.05	28.45	29.55
21	25.00	27.60	31.30	29.70	30.80
22	26.25	28.85	32.55	30.95	32.05
23	27.50	30.10	33.80	32.20	33.30
24	28.75	31.35	35.05	33.45	34.55
25	30.00	32.60	36.30	34.70	35.80
26	31.25	33.85	37.55	35.95	37.05
27	32.50	35.10	38.80	37.20	38.30
28	33.75	36.35	40.05	38.45	39.55
29	35.00	37.60	41.30	39.70	40.80
30	36.25	38.85	42.55	40.95	42.05
31	37.50	40.10	43.80	42.20	43.30
32	38.75	41.35	45.05	43.45	44.55
33	40.00	42.60	46.30	44.70	45.80
34	41.25	43.85	47.55	45.95	47.05
35	42.50	45.10	48.80	47.20	48.30
36	43.75	46.35	50.05	48.45	49.55
37	45.00	47.60	51.30	49.70	50.80
38	46.25	48.85	52.55	50.95	52.05
39	47.50	50.10	53.80	52.20	53.30
40	48.75	51.35	55.05	53.45	54.55

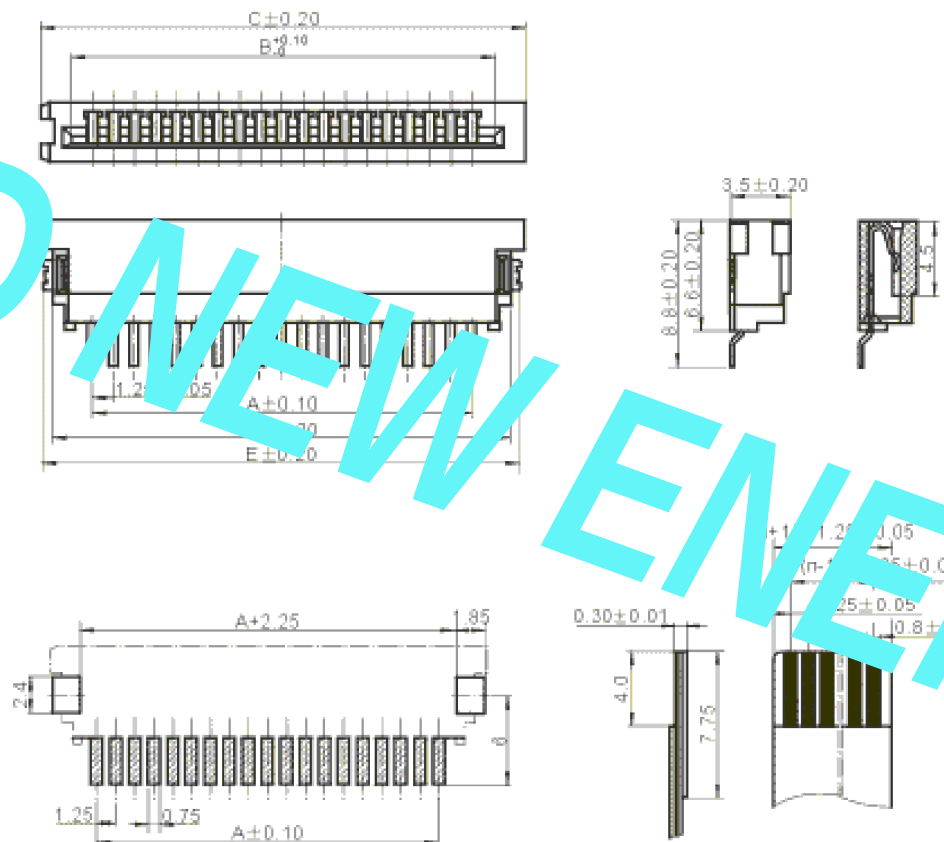

适用扁平电缆
Proper cable

技术参数SPECIFICATIONS
极数: 3~40
Poles:3~40
额定电压: AC, DC, 200V (50HZ有效值)
Voltage rating:AC, DC, 200V (500HZ有效值)
额定电流: 1A, AC, DC
Current rating:1A, AC, DC
耐压值: 500V AC/minute
Withstang voltage:500V AC/minute
工作温度: -25℃~+85℃
Working Temperature:-25℃~+85℃
绝缘电阻: ≥500MΩ
Insulation resistance:≥500MΩ
接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω
单面接触
Single Contact

接触件TERMINAL
材质: 磷青铜
Material:Phosphor Bronze
塑料壳体HOUSING
材质: 尼龙46 UL 94V-0
Material:Nylon46 UL 94V-0
包装方式PACKAGE
管装 Pipe package
袋装 Bag package

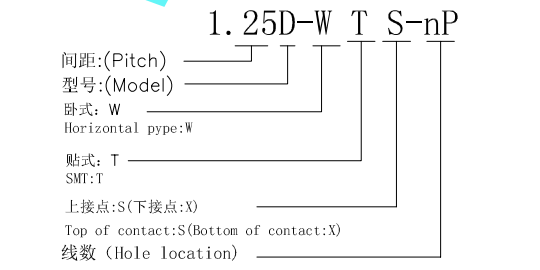

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgcnne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: FPC 1.25D-WT	
				LINEAR	ANGLES	APPROVED					DWG. NO: KDFPC-0038
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2019.01.25		UNIT: MM	0.00±0.15	X° ±3°					
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.01.25	REV: A0 SHEET: 1/1		