


环保物料

孔位 Poles	A	B	C
4	3.75	6.25	8.5
5	5.0	7.5	9.75
6	6.25	8.75	11.0
7	7.5	10.0	12.25
8	8.75	11.25	13.5
9	10.0	12.5	14.75
10	11.25	13.75	16.0
11	12.5	15.0	17.25
12	13.75	16.25	18.5
13	15.0	17.5	19.75
14	16.25	18.75	21.0
15	17.5	20.0	22.25
16	18.75	21.25	23.5
17	20.0	22.5	24.75
18	21.25	23.75	26.0
19	22.5	25.0	27.25
20	23.75	26.25	28.5
21	25.0	27.5	29.75
22	26.25	28.75	31.0
23	27.5	30.0	32.25
24	28.75	31.25	33.5
25	30.0	32.5	34.75
26	31.25	33.75	36.0
27	32.5	35.0	37.25
28	33.75	36.25	38.5
29	35.0	37.5	39.75
30	36.25	38.75	41.0
31	37.5	40.0	42.25
32	38.75	41.25	43.5
33	40.0	42.5	44.75
34	41.25	43.75	46.0
35	42.5	45.0	47.25
36	43.75	46.25	48.5
37	45.0	47.5	49.75
38	46.25	48.75	51.0
39	47.5	50.0	52.25
40	48.75	51.25	53.5

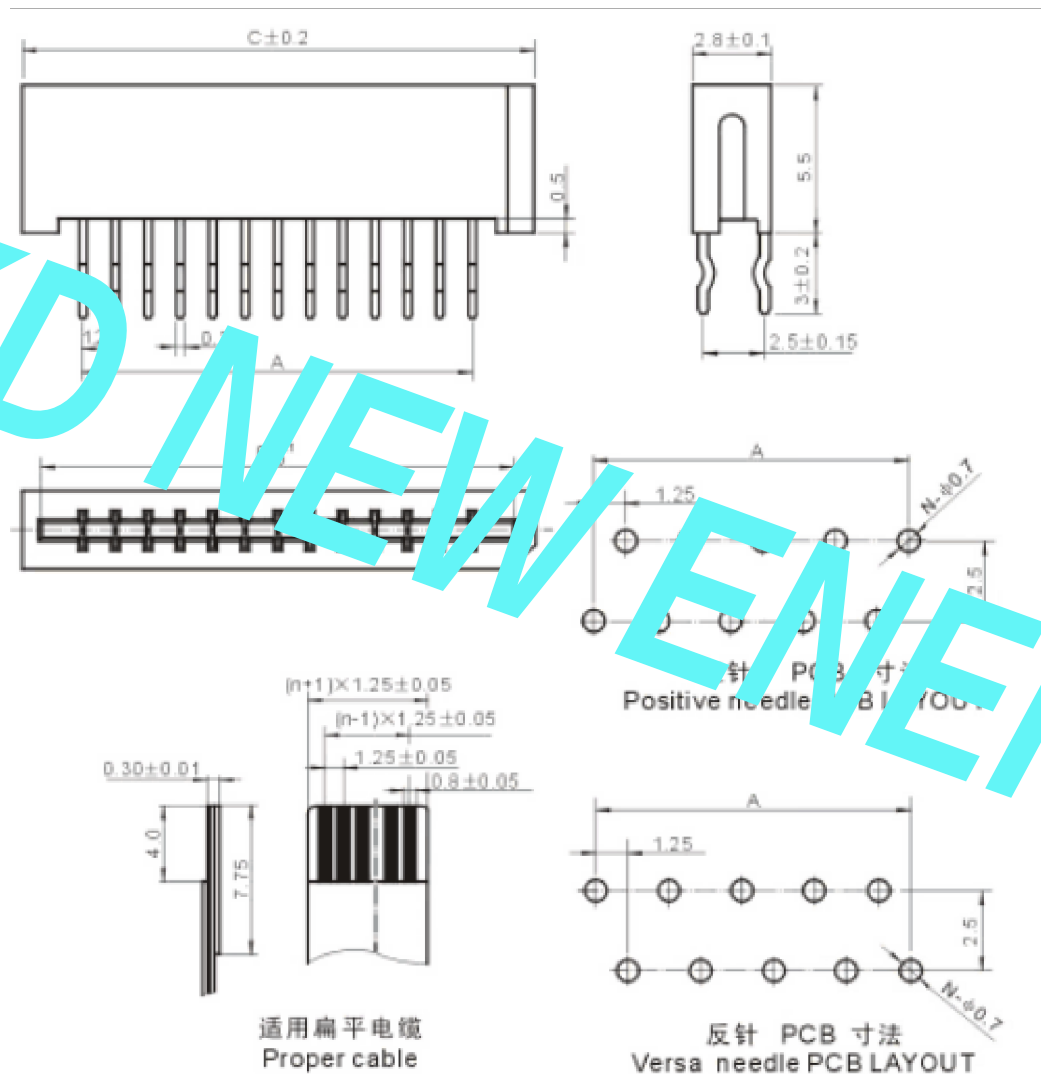

技术参数SPECIFICATIONS

极数: 4~40
Poles: 4~40
额定电压: AC, DC, 50V (50HZ有效值)
Voltage rating: AC, DC, 50V (500HZ有效值)
额定电流: 0.5A, AC, DC
Current rating: 0.5A, AC, DC
耐压值: 500V AC/minute
Withstang voltage: 500V AC/minute
工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
绝缘电阻: ≥800MΩ
Insulation resistance: ≥800MΩ
接触电阻: ≤0.02Ω
Contact resistance: ≤0.02Ω
单面接触
Single Contact

接触件TERMINAL


材质: 磷青铜
Material: Phosphor Bronze

塑料体HOUSING

材质: 尼龙46 UL 94V-0
Material: Nylon46 UL 94V-0

包装方式PACKING

管状 Pipe Package
袋装 Bag Package

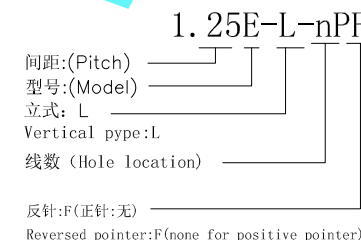

通用扁平电缆
Proper cable

反针 PCB 寸法
Versa needle PCB LAYOUT

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175946@qq.com 公司传真: 0769-85392827	PART. NO: FPC 1.25E-L		
				LINEAR	ANGLES	APPROVED					DWG. NO: KDFPC-0039	
				0.0±0.25	X° REF±6°	DESIGNER						
A0	新图面发行	2019.01.25	UNIT: MM	0.00±0.15	X° ±3°				TITLE: 1.25mm pitch Single Wafer		REV: A0 SHEET: 1/1	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.01.25				

东莞市康导新能源科技有限公司
DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD
公司网址: www.dgconne.cn 公司电话: 0769-85337633
销售热线: 2850175986@qq.com 公司传真: 0769-85392827