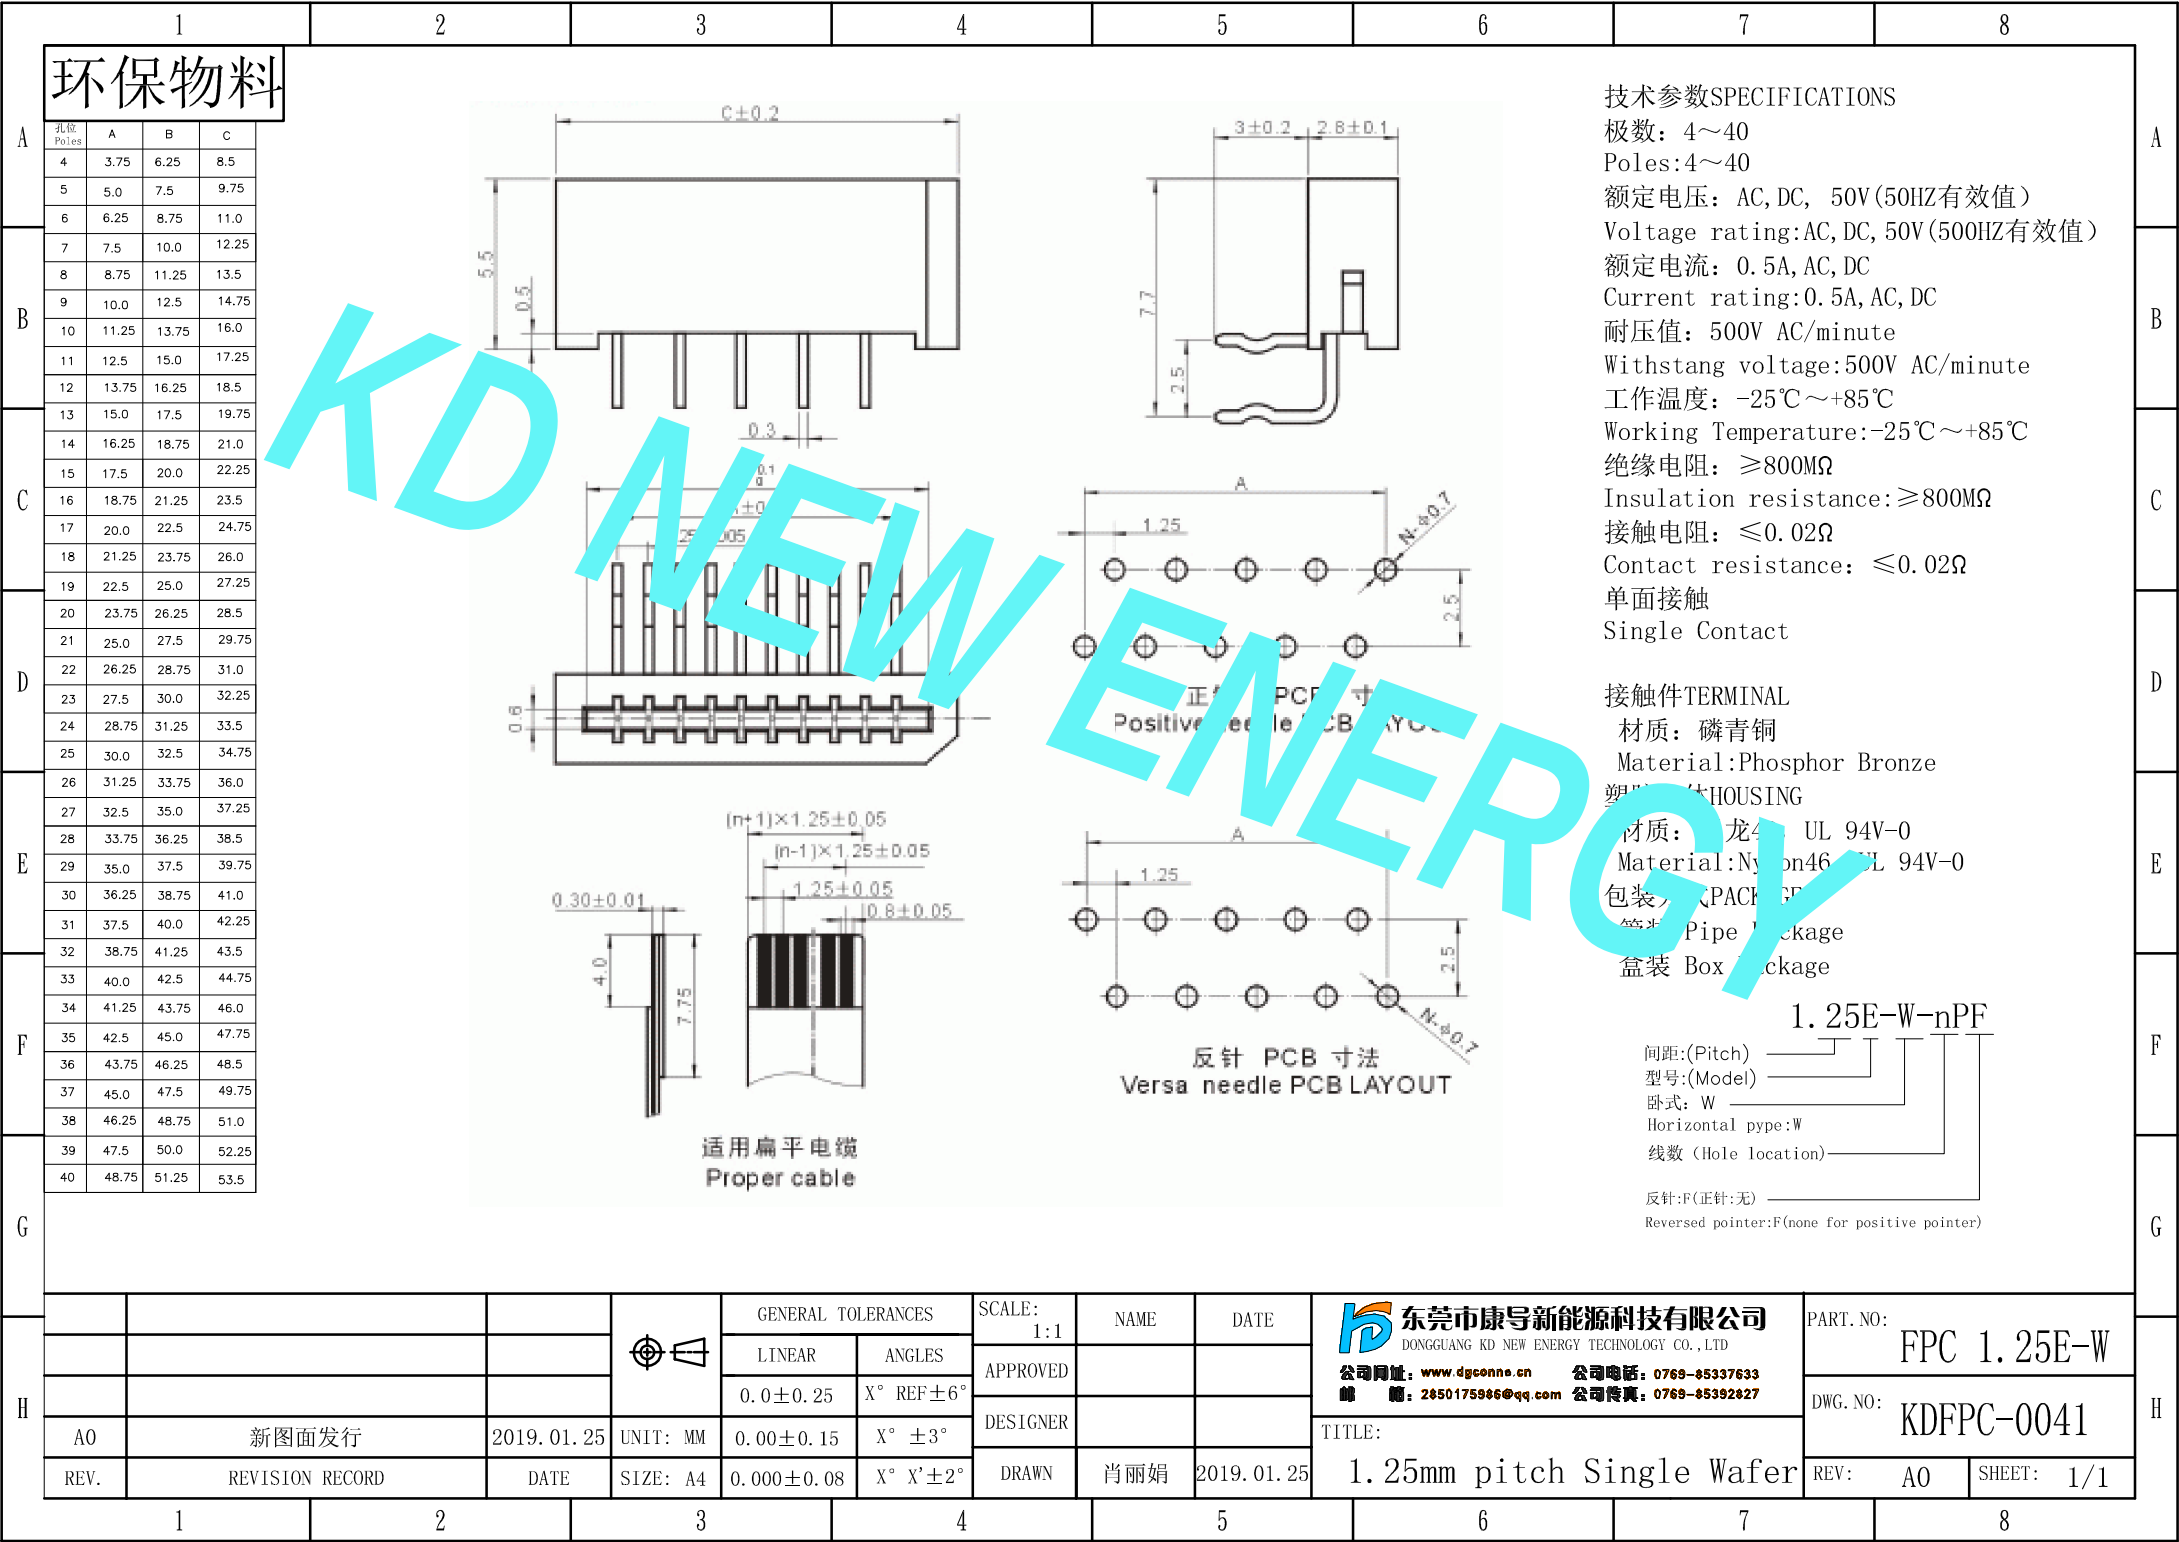


1	2	3	4	5	6	7	8
环保物料							
A	孔径 Poles		A	B	C		
	4	3.75	6.25	8.5			
	5	5.0	7.5	9.75			
	6	6.25	8.75	11.0			
	7	7.5	10.0	12.25			
	8	8.75	11.25	13.5			
B	9	10.0	12.5	14.75			
	10	11.25	13.75	16.0			
	11	12.5	15.0	17.25			
	12	13.75	16.25	18.5			
	13	15.0	17.5	19.75			
C	14	16.25	18.75	21.0			
	15	17.5	20.0	22.25			
	16	18.75	21.25	23.5			
	17	20.0	22.5	24.75			
	18	21.25	23.75	26.0			
	19	22.5	25.0	27.25			
D	20	23.75	26.25	28.5			
	21	25.0	27.5	29.75			
	22	26.25	28.75	31.0			
	23	27.5	30.0	32.25			
	24	28.75	31.25	33.5			
	25	30.0	32.5	34.75			
E	26	31.25	33.75	36.0			
	27	32.5	35.0	37.25			
	28	33.75	36.25	38.5			
	29	35.0	37.5	39.75			
	30	36.25	38.75	41.0			
	31	37.5	40.0	42.25			
	32	38.75	41.25	43.5			
F	33	40.0	42.5	44.75			
	34	41.25	43.75	46.0			
	35	42.5	45.0	47.75			
	36	43.75	46.25	48.5			
	37	45.0	47.5	49.75			
	38	46.25	48.75	51.0			
	39	47.5	50.0	52.25			
G	40	48.75	51.25	53.5			
技术参数SPECIFICATIONS							
极数: 4~40							
Poles:4~40							
额定电压: AC, DC, 50V (50HZ有效值)							
Voltage rating:AC, DC, 50V (500HZ有效值)							
额定电流: 0.5A, AC, DC							
Current rating:0.5A, AC, DC							
耐压值: 500V AC/minute							
Withstang voltage:500V AC/minute							
工作温度: -25℃~+85℃							
Working Temperature:-25℃~+85℃							
绝缘电阻: ≥800MΩ							
Insulation resistance:≥800MΩ							
接触电阻: ≤0.02Ω							
Contact resistance: ≤0.02Ω							
单面接触							
Single Contact							
接触件TERMINAL							
材质: 磷青铜							
Material:Phosphor Bronze							
塑料体HOUSING							
材质: 尼龙46 UL 94V-0							
Material:Nylon46 UL 94V-0							
包装方式PACKAGE							
管状 Pipe Package							
盒装 Box Package							
1.25E-W-nPF							
间距:(Pitch)							
型号:(Model)							
卧式: W							
Horizontal pype:W							
线数 (Hole location)							
反针:F(正针:无)							
Reversed pointer:F(none for positive pointer)							
KDFPC-0041							
A0							
新图面发行							
2019.01.25							
UNIT: MM							
SIZE: A4							
0.000±0.08							
X° X'±2°							
DRAWN							
肖丽娟							
2019.01.25							
1.25mm pitch Single Wafer							
REV:							
A0							
SHEET:							
1/1							
1	2	3	4	5	6	7	8

[illegible]

1	2	3	4	5	6	7	8
环保物料							
A	孔径 Poles		A	B	C		
	4	3.75	6.25	8.5			
	5	5.0	7.5	9.75			
	6	6.25	8.75	11.0			
	7	7.5	10.0	12.25			
	8	8.75	11.25	13.5			
B	9	10.0	12.5	14.75			
	10	11.25	13.75	16.0			
	11	12.5	15.0	17.25			
	12	13.75	16.25	18.5			
	13	15.0	17.5	19.75			
C	14	16.25	18.75	21.0			
	15	17.5	20.0	22.25			
	16	18.75	21.25	23.5			
	17	20.0	22.5	24.75			
	18	21.25	23.75	26.0			
	19	22.5	25.0	27.25			
D	20	23.75	26.25	28.5			
	21	25.0	27.5	29.75			
	22	26.25	28.75	31.0			
	23	27.5	30.0	32.25			
	24	28.75	31.25	33.5			
	25	30.0	32.5	34.75			
E	26	31.25	33.75	36.0			
	27	32.5	35.0	37.25			
	28	33.75	36.25	38.5			
	29	35.0	37.5	39.75			
	30	36.25	38.75	41.0			
	31	37.5	40.0	42.25			
	32	38.75	41.25	43.5			
	33	40.0	42.5	44.75			
F	34	41.25	43.75	46.0			
	35	42.5	45.0	47.75			
	36	43.75	46.25	48.5			
	37	45.0	47.5	49.75			
	38	46.25	48.75	51.0			
	39	47.5	50.0	52.25			
G	40	48.75	51.25	53.5			
技术参数SPECIFICATIONS							
极数: 4~40							
Poles:4~40							
额定电压: AC, DC, 50V (50HZ有效值)							
Voltage rating:AC, DC, 50V (500HZ有效值)							
额定电流: 0.5A, AC, DC							
Current rating:0.5A, AC, DC							
耐压值: 500V AC/minute							
Withstang voltage:500V AC/minute							
工作温度: -25℃~+85℃							
Working Temperature:-25℃~+85℃							
绝缘电阻: ≥800MΩ							
Insulation resistance:≥800MΩ							
接触电阻: ≤0.02Ω							
Contact resistance: ≤0.02Ω							
单面接触							
Single Contact							
接触件TERMINAL							
材质: 磷青铜							
Material:Phosphor Bronze							
塑料体HOUSING							
材质: 尼龙46 UL 94V-0							
Material:Nylon46 UL 94V-0							
包装方式PACKAGE							
管状 Pipe Package							
盒装 Box Package							
1.25E-W-nPF							
间距:(Pitch)							
型号:(Model)							
卧式: W							
Horizontal pype:W							
线数 (Hole location)							
反针:F(正针:无)							
Reversed pointer:F(none for positive pointer)							
KDFPC-0041							
A0							
新图面发行							
2019.01.25							
UNIT: MM							
SIZE: A4							
0.000±0.08							
X° X'±2°							
DRAWN							
肖丽娟							
2019.01.25							
1.25mm pitch Single Wafer							
REV:							
A0							
SHEET: 1/1							
1							
2							
3							
4							
5							
6							
7							
8							

1	2	3	4	5	6	7	8
环保物料							
A	孔径 Poles		A	B	C		
	4	3.75	6.25	8.5			
	5	5.0	7.5	9.75			
	6	6.25	8.75	11.0			
	7	7.5	10.0	12.25			
	8	8.75	11.25	13.5			
B	9	10.0	12.5	14.75			
	10	11.25	13.75	16.0			
	11	12.5	15.0	17.25			
	12	13.75	16.25	18.5			
	13	15.0	17.5	19.75			
C	14	16.25	18.75	21.0			
	15	17.5	20.0	22.25			
	16	18.75	21.25	23.5			
	17	20.0	22.5	24.75			
	18	21.25	23.75	26.0			
	19	22.5	25.0	27.25			
D	20	23.75	26.25	28.5			
	21	25.0	27.5	29.75			
	22	26.25	28.75	31.0			
	23	27.5	30.0	32.25			
	24	28.75	31.25	33.5			
	25	30.0	32.5	34.75			
E	26	31.25	33.75	36.0			
	27	32.5	35.0	37.25			
	28	33.75	36.25	38.5			
	29	35.0	37.5	39.75			
	30	36.25	38.75	41.0			
	31	37.5	40.0	42.25			
	32	38.75	41.25	43.5			
	33	40.0	42.5	44.75			
F	34	41.25	43.75	46.0			
	35	42.5	45.0	47.75			
	36	43.75	46.25	48.5			
	37	45.0	47.5	49.75			
	38	46.25	48.75	51.0			
	39	47.5	50.0	52.25			
G	40	48.75	51.25	53.5			
技术参数SPECIFICATIONS							
极数: 4~40							
Poles:4~40							
额定电压: AC, DC, 50V (50HZ有效值)							
Voltage rating:AC, DC, 50V (500HZ有效值)							
额定电流: 0.5A, AC, DC							
Current rating:0.5A, AC, DC							
耐压值: 500V AC/minute							
Withstang voltage:500V AC/minute							
工作温度: -25℃~+85℃							
Working Temperature:-25℃~+85℃							
绝缘电阻: ≥800MΩ							
Insulation resistance:≥800MΩ							
接触电阻: ≤0.02Ω							
Contact resistance: ≤0.02Ω							
单面接触							
Single Contact							
接触件TERMINAL							
材质: 磷青铜							
Material:Phosphor Bronze							
塑料体HOUSING							
材质: 尼龙46 UL 94V-0							
Material:Nylon46 UL 94V-0							
包装方式PACKAGE							
管状 Pipe Package							
盒装 Box Package							
1.25E-W-nPF							
间距:(Pitch)							
型号:(Model)							
卧式: W							
Horizontal pype:W							
线数 (Hole location)							
反针:F(正针:无)							
Reversed pointer:F(none for positive pointer)							
GENERAL TOLERANCES		SCALE: 1:1		NAME		DATE	
LINEAR		APPROVED					
0.0±0.25		DESIGNER					
X° REF±6°		DRAWN		肖丽娟		2019.01.25	
X° ±3°		TITLE:		1.25mm pitch Single Wafer		PART. NO: FPC 1.25E-W	
X° X'±2°		REV:		A0		SHEET: 1/1	
新图面发行		2019.01.25		UNIT: MM		DWG. NO: KDFPC-0041	
REVISION RECORD		DATE		SIZE: A4		REV: A0	
0.000±0.08		X° X'±2°		DRAWN		SHEET: 1/1	
1		2		3		4	
5		6		7		8	