



环保物料



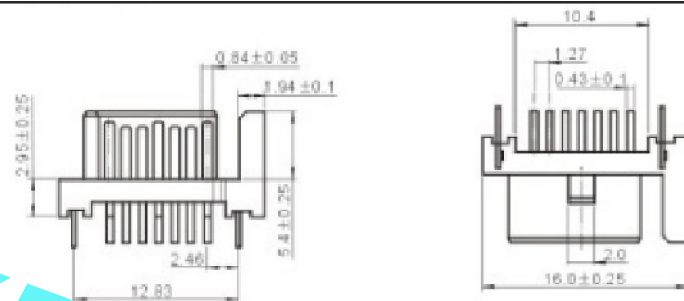


材料 MATERIAL

- 外壳: LCP
Housing: LCP
- 端子: 磷青铜
Terminal: Phosphor bronze



PCB LAYOUT

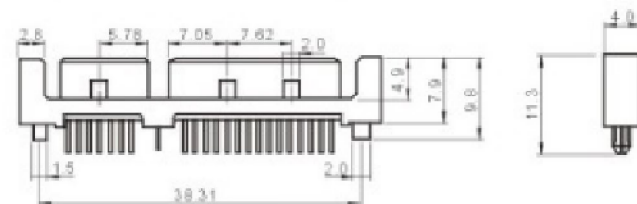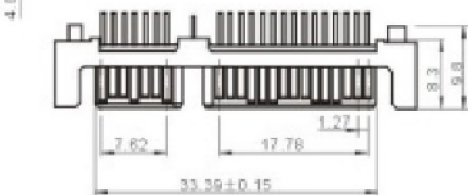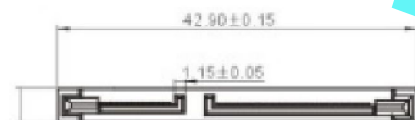

技术参数 SPECIFICATIONS

- Pin数: 7
Pitch: 1.27mm
- 适用线规: AWG#26~#30
Applicable wire: AWG#26~#30
- 额定电压: 50V DC/AC(有效值)
Voltage rating: 50V DC/AC (rms)
- 额定电流: 1.0A
Current rating: 1.0A
- 耐压值: 500V AC(有效值)
Withstand voltage: 500V AC(rms)
- 工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
- 绝缘电阻: $\geq 500M\Omega$
Insulation resistance: $\geq 500M\Omega$
- 接触电阻: $\leq 0.02\Omega$
Contact resistance: $\leq 0.02\Omega$

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: SATA 1.27MM	
				LINEAR	ANGLES	APPROVED				DWG. NO: KDFPC-0043	
				0.0±0.25	X° REF±6°						
A0	新图面发行	2019.02.11	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER	TITLE: 1.27mm pitch Single Wafer			REV: A0	SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.02.11			