
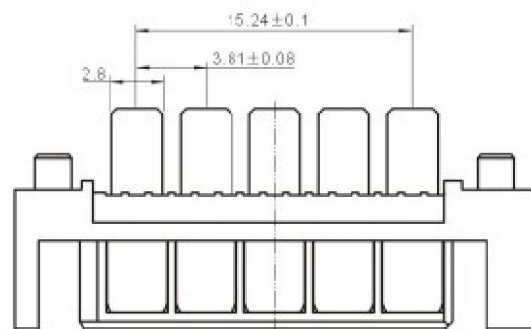
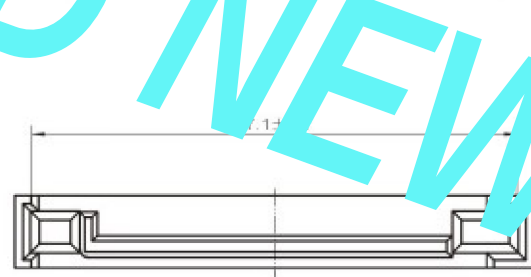


环保物料

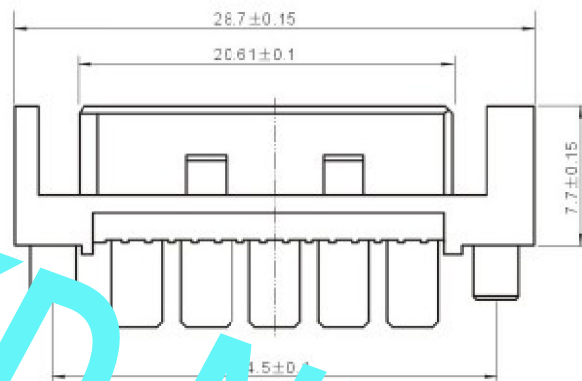

材料 MATERIAL

- 外壳: LCP
Housing: LCP
- 端子: 磷青铜
Terminal: Phosphor bronze

技术参数 SPECIFICATIONS

- 间距: 1.27mm
Pitch: 1.27mm
- 线数: 15
Poles: 15
- 适用线规: AWG#26~#20
Applicable wire: AWG#26~#20
- 额定电压: 50V DC/AC(有效值)
Voltage rating: 50V DC/AC (rms)
- 额定电流: 1.0A
Current rating: 1.0A
- 耐压值: 500V AC(有效值)
Withstand voltage: 500V AC(rms)
- 工作温度: -25℃~+85℃
Working Temperature: -25℃~+85℃
- 绝缘电阻: $\geq 500M\Omega$
Insulation resistance: $\geq 500M\Omega$
- 接触电阻: $\leq 0.02\Omega$
Contact resistance: $\leq 0.02\Omega$



GENERAL TOLERANCES

LINEAR	ANGLES
0.0 ± 0.25	$X^\circ \text{ REF} \pm 6^\circ$
0.00 ± 0.15	$X^\circ \pm 3^\circ$
0.000 ± 0.08	$X^\circ X' \pm 2^\circ$

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2019. 02. 11



东莞市康导新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgkonne.cn

公司电话: 0769-85337633

邮箱: 2850175986@qq.com

公司传真: 0769-85392827

PART. NO:

SATA 1.27MM

DWG. NO:

KDFPC-0044

REV:

A0

SHEET:

1/1

KD NEW ENERGY