



环保物料

孔位 Poles	A	B	C
3	5.08	11.06	12.86
4	7.62	13.60	15.40
5	10.16	16.14	17.94
6	12.7	18.68	20.48
7	15.24	21.22	23.02
8	17.78	23.76	25.56
9	20.32	26.30	28.10
10	22.86	28.84	30.64
11	25.40	31.38	33.18
12	27.94	33.92	35.72
13	30.48	36.46	38.26
14	33.02	39.00	40.80
15	35.56	41.54	43.34
16	38.10	44.08	45.88
17	40.64	46.62	48.42
18	43.18	49.16	50.96
19	45.72	51.70	53.50
20	48.26	54.24	56.04
21	50.80	56.78	58.58

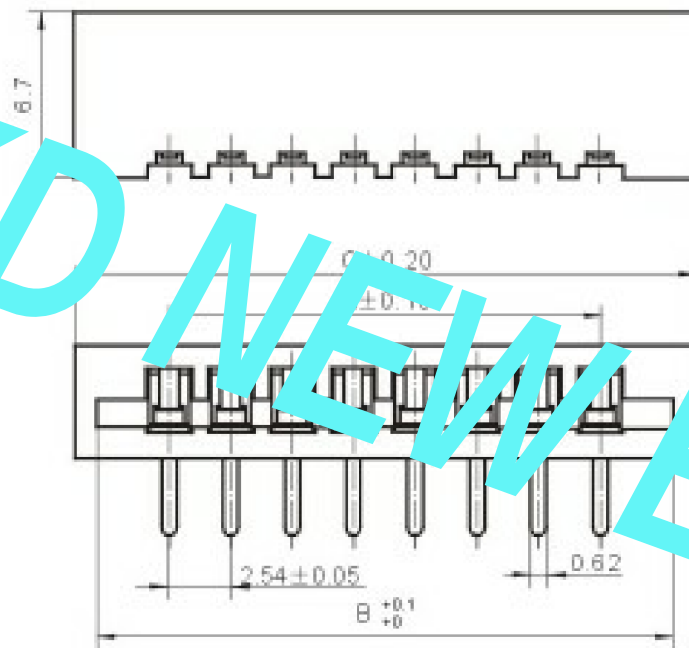

技术参数SPECIFICATIONS

线数:3-21

Poles:3-21

额定电压: AC, DC, 200V(50HZ有效值)

Voltage rating:AC, DC, 200V(500HZ有效值)

额定电流: 1.0A, AC, DC

Current rating:1.0A, AC, DC

耐压值: 500V AC/minute

Withstang voltage:500V AC/minute

工作温度: -20℃~+85℃

Working Temperature:-20℃~+85℃

绝缘电阻: ≥500MΩ

Insulation resistance:≥500MΩ

接触电阻: ≤0.03Ω

Contact resistance: ≤0.03Ω

双面接触

Dual Contact

材料 MATERIAL

接触性:磷青铜 镀锡

Contact:Phosphor Bronze Tin-plated

塑胶本体:热塑性塑料(UL94V-0)

Housing::Thermopiastic(UL94V-0)

包装方式 PAC

袋装 Bag Package

PCB寸法
PCB Layout

2.54A-W-nP
间距:(Pitch)
类型:(Type)
卧式: W(立式无)
Horizontal pype:W(none for vertical one)
极数 (Poles)

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: 2.54A-W-NP
				LINEAR	ANGLES	APPROVED				DWG. NO: KDFPC-0046
A0	新图面发行	2019.02.11		0.0±0.25	X° REF±6°	DESIGNER				
REV.	REVISION RECORD	DATE		0.00±0.15	X° ±3°	DRAWN	肖丽娟	2019.02.11		REV: A0 SHEET: 1/1
				SIZE: A4	0.000±0.08				TITLE: 2.54mm pitch Single Wafer	