



环保物料

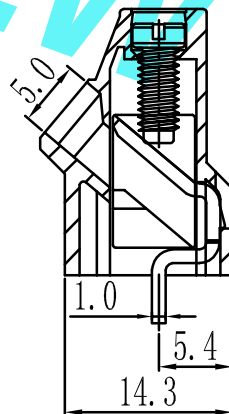

N=Number of Contacts

产品型号	MODEL	KD104	
材质&电镀	MATERIAL&PLATING		
螺丝	Screw	M3.0, 钢, 镀锌 steel,Zinc Plated	
弹片	Reed	黄铜, 镀镍 Brass,Ni plated	
焊针	Pin header	黄铜, 镀锡 Brass,Tin plated	
塑件	Housing	PA66, UL94V-0	
电气性能	ELECTRICAL	UL	IEC
额定电压	Rated voltage	300V	250V
额定电流	Rated current	10A	18A
接触电阻	Contact resistance	20mΩ	
绝缘电阻	Insulation resistance	500MΩ/1000V	
耐电压	Withstanding voltage	AC2000V/1min	
使用线径	Wire range	24-14AWG 2.5mm ²	
机械性能	MECHANICAL		
温度范围	Temp. range	-40℃~+105℃	
瞬时温度	Max. soldering	+250℃, 5sec	
扭矩	Torque	0.4N.m 3.5lb.in	
剥线长度	Strip length	6-7mm	

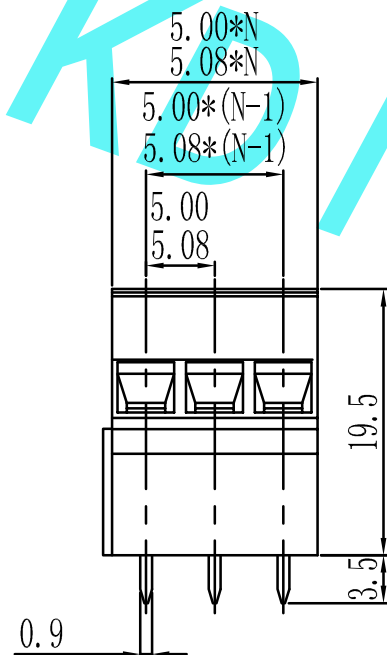

GENERAL TOLERANCES

LINEAR ANGLES

0.0±0.25 X° REF±6°

0.00±0.15 X° ±3°

0.000±0.08 X° X'±2°

SCALE:
1:1

NAME

DATE

APPROVED

DESIGNER

DRAWN

肖丽娟

2019.02.14



东莞市康导新能源科技有限公司

DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD

公司网址: www.dgconne.cn

公司电话: 0769-85337633

邮箱: 2850175986@qq.com 公司传真: 0769-85392827

TITLE:

5.00/5.08mm pitch EURO TERMINAL BLOCKS

PART. NO:

KD104

DWG. NO:

KDTB-0032

REV: A0

SHEET: 1/1