


环保物料

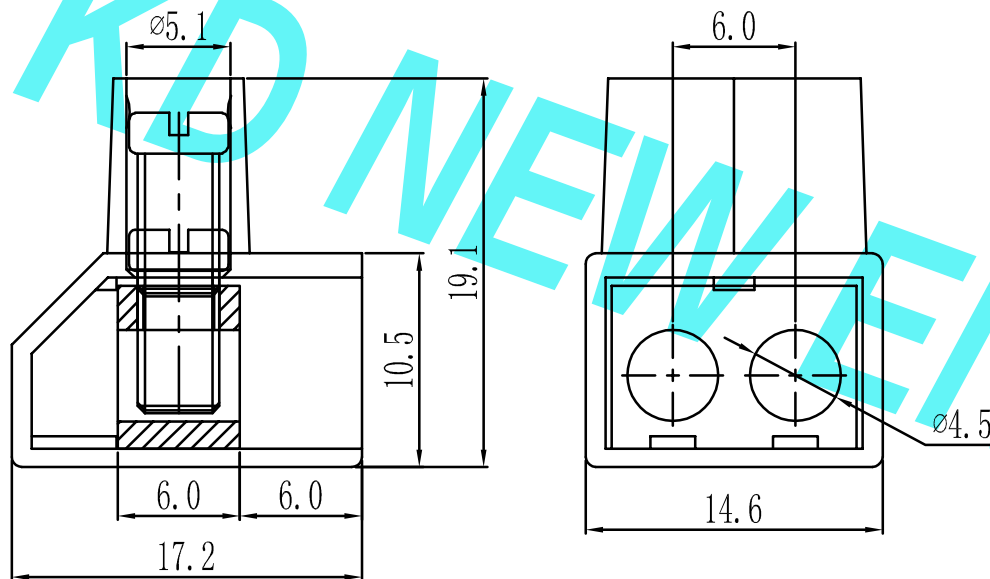

N=Number of Contacts

产品型号	MODEL	RU10-T85
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M4.0, 钢, 镀锌 steel,Zinc Plated
弹片	Reed	黄铜, 镀镍 Brass,Ni plated
焊针	Pin header	-
塑件	Housing	PC
电气性能	ELECTRICAL	IEC
额定电压	Rated voltage	450V
额定电流	Rated current	57A
接触电阻	Contact resistance	-
绝缘电阻	Insulation resistance	-
耐电压	Withstanding voltage	-
使用线径	Wire range	-
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+125℃
瞬时温度	Max. soldering	+250℃, 5sec
扭矩	Torque	1.2N.m 10.53Lb.in
剥线长度	Strip length	10mm

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康号新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 电 邮: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: RU10-T85	
				LINEAR	ANGLES	APPROVED				DWG. NO: KDTB-0039	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2019.02.14	UNIT: MM	0.00±0.15	X° ±3°					TITLE: 6.00mm pitch EURO TERMINAL BLOCKS	REV: A0
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.02.14			