


环保物料

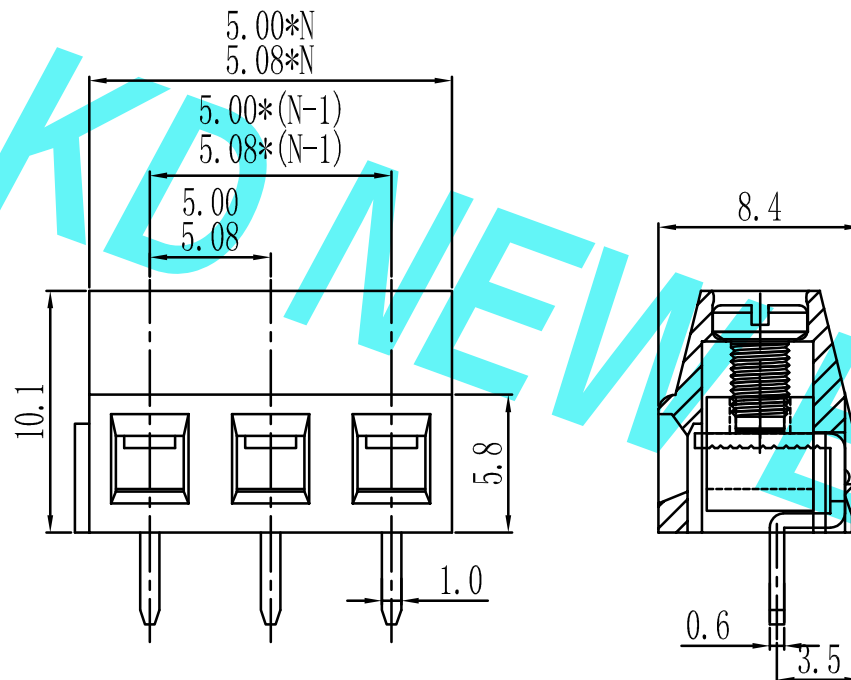

N=Number of Contacts

产品型号	MODEL	KD127
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M2.5, 钢, 镀锌 steel,Zinc Plated
弹片	Reed	黄铜, 镀镍 Brass,Ni plated
焊针	Pin header	黄铜, 镀锡 Brass,Tin plated
塑件	Housing	PA66, UL94V-0
电气性能	ELECTRICAL	UL IEC
额定电压	Rated voltage	300V 250V
额定电流	Rated current	12A 15A
接触电阻	Contact resistance	20mΩ
绝缘电阻	Insulation resistance	500MΩ/1000V
耐电压	Withstanding voltage	AC2000V/1min
使用线径	Wire range	26-14AWG 2.5mm ²
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+105℃
瞬时温度	Max. soldering	+250℃, 5sec
扭矩	Torque	0.4N.m 3.5Lb.in
剥线长度	Strip length	5-6mm

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康号新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 电 邮: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: KD127	
				LINEAR	ANGLES	APPROVED					
				0.0±0.25	X° REF±6°						
A0	新图面发行	2019.02.14	UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 5.00/5.08mm pitch EURO TERMINAL BLOCKS	DWG. NO: KDTB-0040
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.02.14	REV: A0		SHEET: 1/1