


环保物料

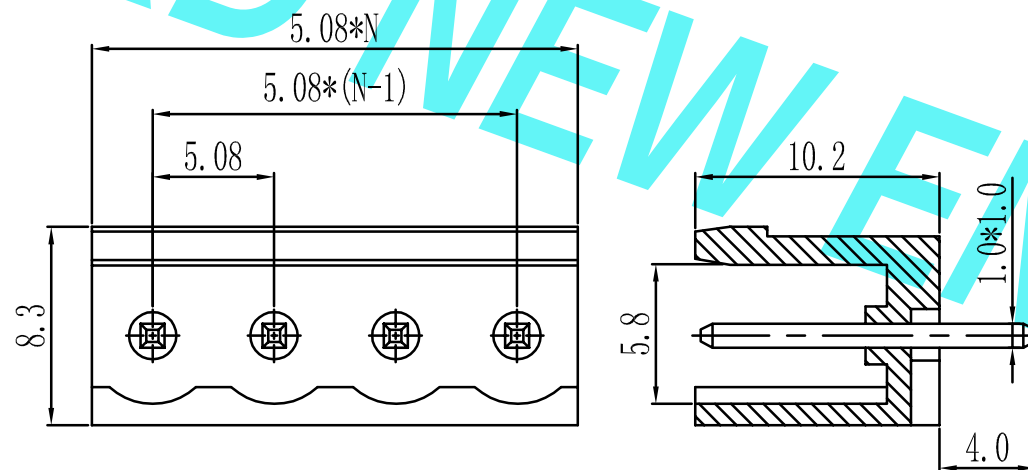

N=Number of Contacts

产品型号	MODEL	HT508V
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	-
弹片	Reed	-
焊针	Pin header	黄铜, 镀锡 Brass, Tin plated
塑件	Housing	PA66, UL94V-0
电气性能	ELECTRICAL	UL IEC
额定电压	Rated voltage	300V 320V
额定电流	Rated current	10A 20A
接触电阻	Contact resistance	20mΩ
绝缘电阻	Insulation resistance	500MΩ/1000V
耐电压	Withstanding voltage	AC2000V/1min
使用线径	Wire range	-
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+105℃
瞬时温度	Max. soldering	+250℃, 5sec
扭矩	Torque	-
剥线长度	Strip length	-

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 电 邮: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: HT508V
				LINEAR	ANGLES	APPROVED				DWG. NO: KDTB-0122
				0.0±0.25	X° REF±6°	DESIGNER				REV: A0
A0	新图面发行	2019.02.18	UNIT: MM	0.00±0.15	X° ±3°	DRAWN	肖丽娟	2019.02.18		SHEET: 1/1
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°				TITLE: 5.08mm pitch PLUGGABLE TERMINAL BLOCKS	