


环保物料

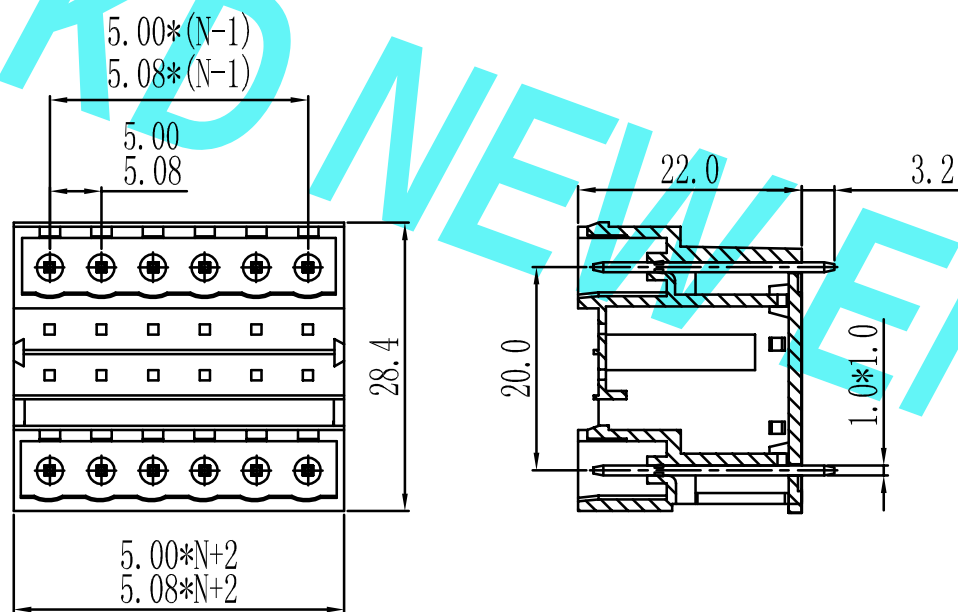

N=Number of Contacts

产品型号	MODEL	KD1026V	
材质&电镀	MATERIAL&PLATING		
螺丝	Screw	-	
弹片	Reed	-	
焊针	Pin header	黄铜, 镀锡 Brass, Tin plated	
塑件	Housing	PA66, UL94V-0	
电气性能	ELECTRICAL	UL	IEC
额定电压	Rated voltage	300V	320V
额定电流	Rated current	15A	20A
接触电阻	Contact resistance	20mΩ	
绝缘电阻	Insulation resistance	500MΩ/1000V	
耐电压	Withstanding voltage	AC2000V/1min	
使用线径	Wire range	-	
机械性能	MECHANICAL		
温度范围	Temp. range	-40℃~+105℃	
瞬时温度	Max. soldering	+250℃, 5sec	
扭矩	Torque	-	
剥线长度	Strip length	-	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUAN KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: KD1026V		
				LINEAR	ANGLES	APPROVED				DWG. NO: KDTB-0126		
				0. 0±0. 25	X° REF±6°	DESIGNER					TITLE: 5. 00/5. 08mm pitch PLUGGABLE TERMINAL BLOCKS	
A0	新图面发行	2019. 02. 18		UNIT: MM	0. 00±0. 15	X° ±3°	DRAWN	肖丽娟				2019. 02. 18
REV.	REVISION RECORD	DATE	SIZE: A4	0. 000±0. 08	X° X'±2°							