


环保物料

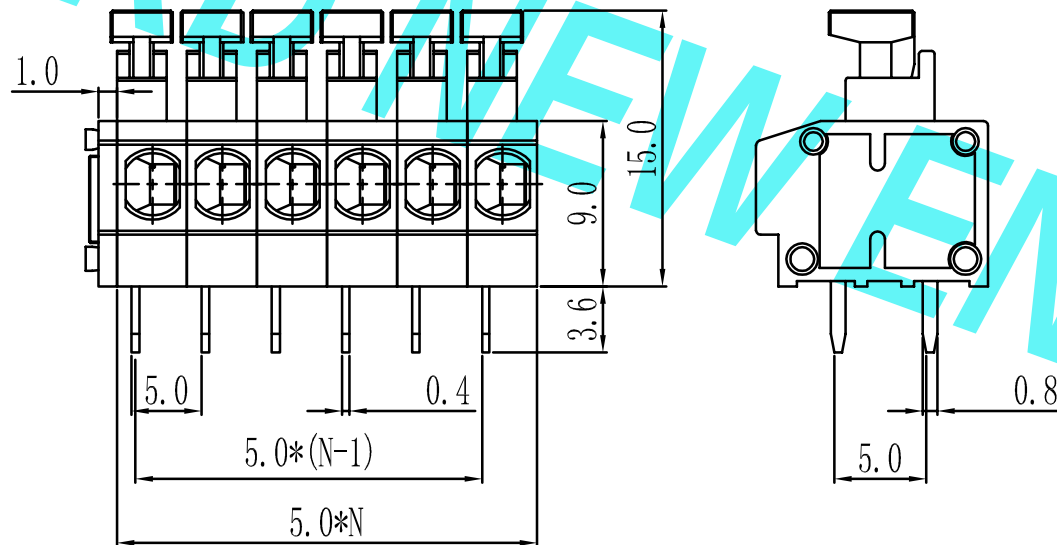

N=Number of Contacts

产品型号	MODEL	KD124B
材质&电镀	MATERIAL&PLATING	-
螺丝	Screw	-
弹片	Reed	不锈钢 Stainless steel
焊针	Pin header	黄铜, 镀锡 Brass, Tin plated
塑件	Housing	PA66, UL94V-0
电气性能	ELECTRICAL	UL IEC
额定电压	Rated voltage	150V 250V/450V/750V
额定电流	Rated current	5A 10A/15A/15A
接触电阻	Contact resistance	20mΩ
绝缘电阻	Insulation resistance	500MΩ/1000V
耐电压	Withstanding voltage	AC2000V/1min
使用线径	Wire range	20-18AWG 1.5mm ²
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+105℃
瞬时温度	Max. soldering	+250℃, 5sec
扭矩	Torque	-
剥线长度	Strip length	8-9mm

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 DONGGUANG KD NEW ENERGY TECHNOLOGY CO.,LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 电 邮: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: KD124B	
				LINEAR	ANGLES	APPROVED				DWG. NO: KDTB-0164	
				0.0±0.25	X° REF±6°	DESIGNER					
A0	新图面发行	2019.02.23		UNIT: MM	0.00±0.15	X° ±3°					TITLE: 3.81/3.96/5.00/7.50/10.00mm pitch SCREWLESS TERMINAL BLOCKS
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.02.23		REV: A0	SHEET: 1/1