


环保物料

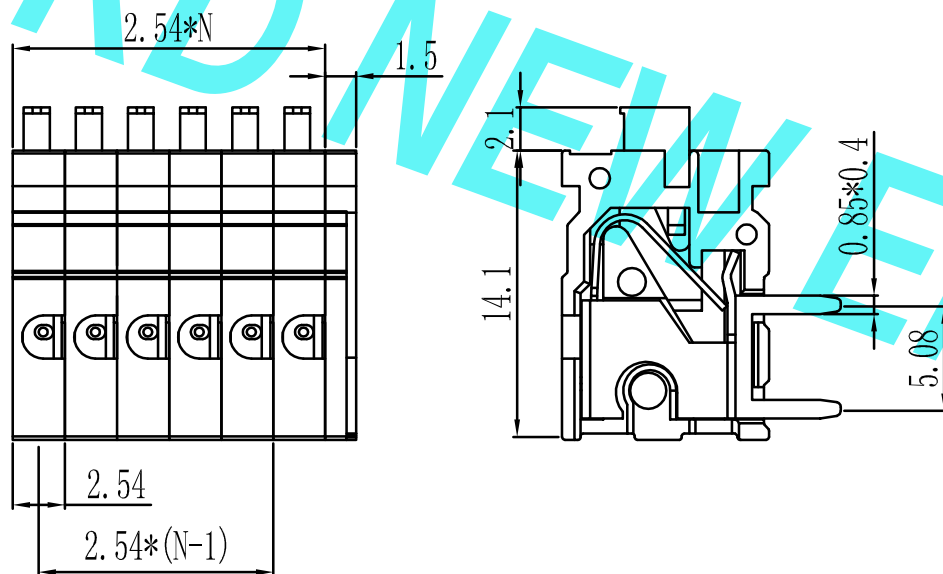

N=Number of Contacts

产品型号	MODEL	KD143R
材质&电镀	MATERIAL&PLATING	-
螺丝	Screw	不锈钢 Stainless steel
弹片	Reed	黄铜, 镀锡 Brass, Tin plated
焊针	Pin header	PA66, UL94V-0
塑件	Housing	UL IEC
电气性能	ELECTRICAL	150V 130V
额定电压	Rated voltage	5A 6A
额定电流	Rated current	20mΩ
接触电阻	Contact resistance	500MΩ/1000V
绝缘电阻	Insulation resistance	AC1250V/1min
耐电压	Withstanding voltage	24-20AWG 1.0mm ²
使用线径	Wire range	-40℃~+105℃
机械性能	MECHANICAL	+250℃, 5sec
温度范围	Temp. range	-
瞬时温度	Max. soldering	11mm
扭矩	Torque	
剥线长度	Strip length	

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 电 邮: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: KD143R		
				LINEAR	ANGLES	APPROVED						
				0.0±0.25	X° REF±6°							
A0	新图面发行	2019.02.23		UNIT: MM	0.00±0.15		X° ±3°	DESIGNER				DWG. NO: KDTB-0162
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.02.23	TITLE: 2.54mm pitch SCREWLESS TERMINAL BLOCKS		REV: A0	SHEET: 1/1