


环保物料

产品型号	MODEL	KD12HWP
材质&电镀	MATERIAL&PLATING	
螺丝	Screw	M3.5, 钢, 镀锌 Steel, Zinc Plated
端子	Terminal	黄铜, 镀镍 Brass, Nickel plated
塑件	Housing	Nylon PA66, UL94V-2
电线保护装置	Wire protector	不锈钢 Stainless Steel
电气性能	ELECTRICAL	
额定电压	Rated voltage	500V
测试电流	Test current	to EN 60998:57A
使用线径	Wire range	2.5-6.0mm ²
机械性能	MECHANICAL	
温度范围	Temp. range	-40℃~+110℃
产品编号	Product number code	KD12HWP-XP
底座高	High base	H
-	XP	No. of pole 1...12:1pole...12pole
-	WP	保护器 With wire protector

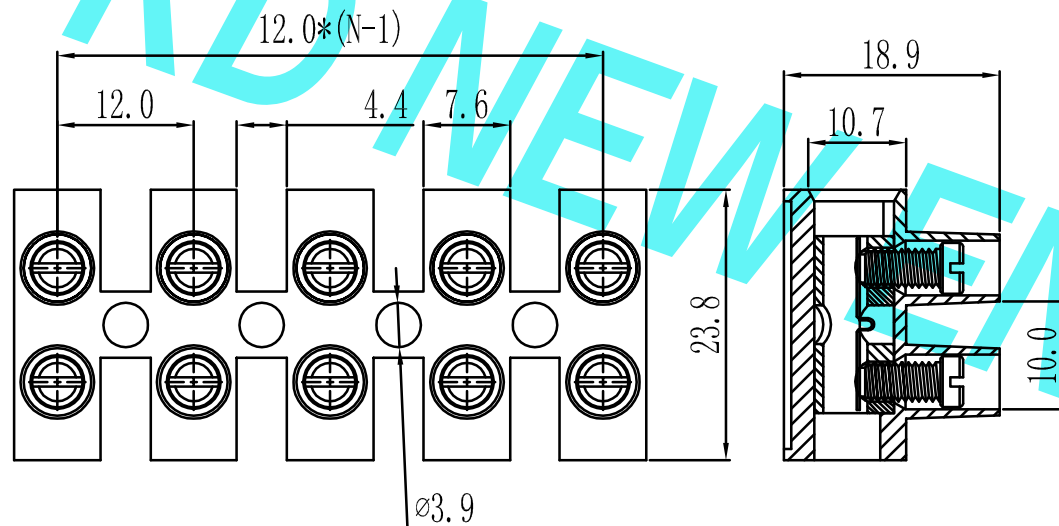

N=Number of Contacts

				GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	 东莞市康导新能源科技有限公司 DONGGUANG KD NEW ENERGY TECHNOLOGY CO., LTD 公司网址: www.dgconne.cn 公司电话: 0769-85337633 邮 箱: 2850175986@qq.com 公司传真: 0769-85392827	PART. NO: KD12HWP		
				LINEAR	ANGLES	APPROVED				DWG. NO: KDTB-0187		
				0.0±0.25	X° REF±6°							
A0	新图面发行	2019.02.25		UNIT: MM	0.00±0.15	X° ±3°	DESIGNER				TITLE: 12.00mm pitch FEED THROUGH TERMINAL BLOCKS	
REV.	REVISION RECORD	DATE	SIZE: A4	0.000±0.08	X° X'±2°	DRAWN	肖丽娟	2019.02.25	REV: A0 SHEET: 1/1			